



HANDRA Side - Ø2"

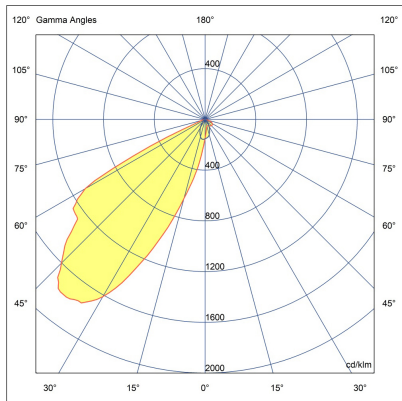

LH5005.595-EN-SLSH-350-740

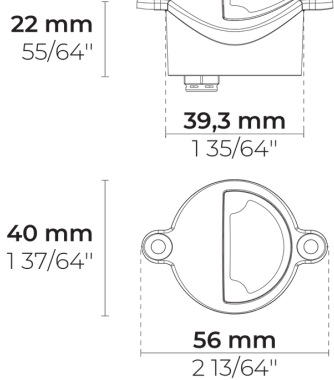

[SLSH]

Special linear, Side throw

Configuration




Light distribution	[SLSH] 42x54°
Delivered lumens flux	48 lm
Rated input power	1 W
Color temperature	4000 K CRI 70
Luminaire efficacy	48 lm/W
Lamp	1 LED
Color Deviation	4 SDCM
Lifetime L90 (hour)	>102,000
Lifetime L80 (hour)	>102,000

Options









Technical information

Housing	Corrosion resistant, die-cast, marine grade aluminum housing
Finishing	Chromate conversion pretreatment followed by electrostatic powder coating
Fasteners	Stainless steel (AISI 304 / EN 1.4301 grade)
Gasket	Liquid gasket
Lens / Reflector	High reflectance aluminium coating
Glass / Diffusor	Custom Design PMMA Diffusor
Impact protection	IK10
Ingress protection	IP65
Input voltage	3 Vdc (Max) 350 mA
Insulation class	Class III
Weight	0.05 kg
LED module	High power LEDs on metal-core PCB
Driver	External LED driver
Through wiring	Single power cord entry
Operating temperature	-25...50°C
Power cord	8" of flexible power cord
Packing box dimensions	7*7*7 cm
Notes	QUICK SHIP: Some variants will be delivered faster. Please consult the factory.

Accessories (To be ordered separately)

Mounting accessories	Mounting accessories	Mounting accessories
		
DALI & On/Off driver within an IP67 box for 1 to 6 HANDRA modules	DALI & On/Off driver within an IP67 box for 7 to 15 HANDRA modules	DALI & On/Off driver within an IP67 box for 16 to 35 HANDRA modules
007502063	007502064	007502065

Project name					Type		Quantity	
Date		Note						
LH5005.595-EN-SLSH-350-740-__-__								

Light distribution	Rated input power	Color temperature	Control	Product colors
<div>[SLSH] Special linear, Side throw - 42x54°</div> <div></div>	<div>[350] 1 W</div>	<div>[740] 4000 K CRI 70</div> <div>[827] 2700 K CRI 80</div> <div>[830] 3000 K CRI 80</div> <div>[840] 4000 K CRI 80</div>	<div>[ONOFF] On/Off</div> <div>[DALI] DALI</div>	<div>[HM1] Black</div> <div>[HM2] Dark gray</div> <div>[HM3] Anthracite gray</div> <div>[HM4] Light gray</div> <div>[HM5] White</div> <div>[HM6] Bronze</div> <div>[CC] Custom color (Please specify RAL code)</div>
Accessories (<i>To be ordered separately</i>)				
Mounting accessories				
<div>[007502063] DALI & On/Off driver within an IP67 box for 1 to 6 HANDRA modules</div> <div>[007502064] DALI & On/Off driver within an IP67 box for 7 to 15 HANDRA modules</div> <div>[007502065] DALI & On/Off driver within an IP67 box for 16 to 35 HANDRA modules</div>				