

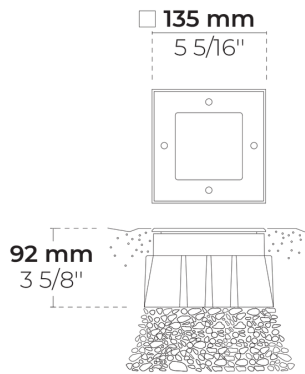


LR9003.530-EN-ASYM-20x65-350-740-ONOFF-EN-C1

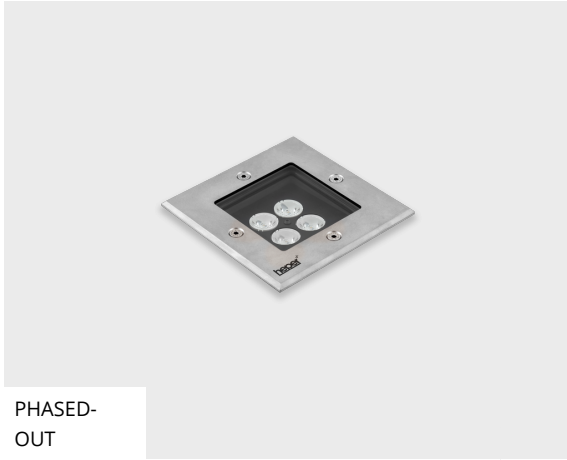

[EL]
Elliptical

Variant

Light distribution	[EL] 20x65°
Delivered lumens flux	650 lm
Rated input power	6 W
Colour temperature	4000 K CRI 70
Luminaire efficacy	108 lm/W
Lamp	4 LED
MacAdam Ellipse	3 SDCM
Lifetime L90B50 (hour)	>145,000
Lifetime L80B50 (hour)	>145,000


Options

Technical information

Housing	Corrosion resistant, die-cast, marine grade aluminum housing
Fasteners	Stainless steel (AISI 304 / EN 1.4301 grade)
Gasket	Silicone
Lens / Reflector	PMMA lens with high optical efficiency
Glass / Diffusor	Tempered safety glass
Impact protection	IK08
Ingress protection	IP67
Input voltage	220-240V 50/60Hz
Insulation class	Class I
Weight	1.9 kg
LED module	High power LEDs on metal-core PCB
Driver	Internal LED driver
Driver surge protection	3/3 kV
Power factor	> 0.40
Through wiring	Single cable entry
Operating temperature	-40...50°C
Cable	0.3 m of rubber-sheathed cable

Accessories (Included)

Mounting accessories



**Plastic sleeve for
WEDGE**

160401047/6

Accessories (To be ordered separately)


Mounting accessories



**Case removing
vacuum**

160404012









Mounting accessories



**Connector set - 5-
pole**

141407400

Project name		Type		Quantity	
Date		Note			
LR9003.530-EN-ASYM-20x65-350-740-ONOFF-EN-C1-__-__					

Light distribution	Rated input power	Colour temperature	Control	Product colours
[EL] Elliptical - 20x65°	[350] 6 W	[740] 4000 K CRI 70	[ONOFF] On/Off	[HM1]  Black
[VN] Very narrow - 10°		[830] 3000 K CRI 80		[HM2]  Dark grey
				[HM3]  Anthracite grey
				[HM4]  Light grey
				[HM5]  White
				[HM6]  Bronze
				[9006]  White aluminium (RAL 9006)
				[CC]  Custom colour (Please specify RAL code)
Extras	Accessories <i>(Included)</i>	Accessories <i>(To be ordered separately)</i>		
Consult the factory	Mounting accessories	Mounting accessories		
[UNI] 120-277V 50/60Hz	[160401047/6] Plastic sleeve for WEDGE	[160404012] Case removing vacuum [141407400] Connector set - 5-pole		