



WEDGE



LR9003.530-EN-ASYM-20x65-350-740-ONOFF

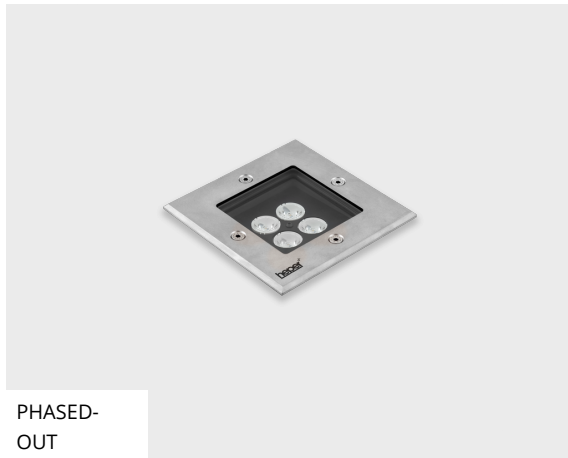

PHASED-
OUT

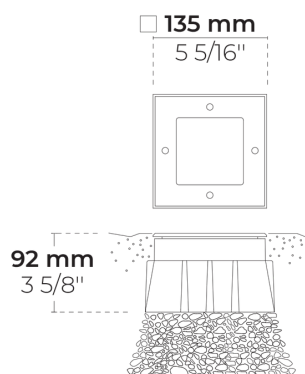

[EL]
Elliptical

Configuration

Light distribution	[EL] 20x65°
Delivered lumens flux	650 lm
Rated input power	6 W
Color temperature	4000 K CRI 70
Luminaire efficacy	108 lm/W
Lamp	4 LED
Color Deviation	3 SDCM
Lifetime L90 (hour)	>145,000
Lifetime L80 (hour)	>145,000


Options

Technical information

Housing	Corrosion resistant, die-cast, marine grade aluminum housing
Fasteners	Stainless steel (AISI 304 / EN 1.4301 grade)
Gasket	Silicone
Lens / Reflector	PMMA lens with high optical efficiency
Glass / Diffusor	Tempered safety glass
Impact protection	IK08
Ingress protection	IP67
Input voltage	220-240V 50/60Hz
Insulation class	Class I
Weight	1.9 kg
LED module	High power LEDs on metal-core PCB
Driver	Internal LED driver
Driver surge protection	3/3 kV
Power factor	> 0.40
Through wiring	Single power cord entry
Operating temperature	-40...50°C
Power cord	12" of rubber-sheathed power cord

Accessories (Included)

Mounting accessories



Plastic sleeve for
WEDGE

160401047/6

Accessories (To be ordered separately)


Mounting accessories



Case removing
vacuum

160404012









Mounting accessories



Connector set - 5-
pole

141407400

Project name					Type		Quantity	
Date		Note						
LR9003.530-EN-ASYM-20x65-350-740-ONOFF-__-__								

Light distribution	Rated input power	Color temperature	Control	Product colors
[EL] Elliptical - 20x65°	[350] 6 W	[740] 4000 K CRI 70	[ONOFF] On/Off	[HM1]  Black
[VN] Very narrow - NEMA Type 1 - 10°		[830] 3000 K CRI 80		[HM2]  Dark gray
				[HM3]  Anthracite gray
				[HM4]  Light gray
				[HM5]  White
				[HM6]  Bronze
				[9006]  White aluminium (RAL 9006)
				[CC]  Custom color (Please specify RAL code)
Extras	Accessories <i>(Included)</i>	Accessories <i>(To be ordered separately)</i>		
Consult the factory	Mounting accessories	Mounting accessories		
[UNI] 120-277V 50/60Hz	[160401047/6] Plastic sleeve for WEDGE	[160404012] Case removing vacuum [141407400] Connector set - 5-pole		