



# WEDGE



LR9003.530-EN-ASYM-20x65-350-740-ONOFF

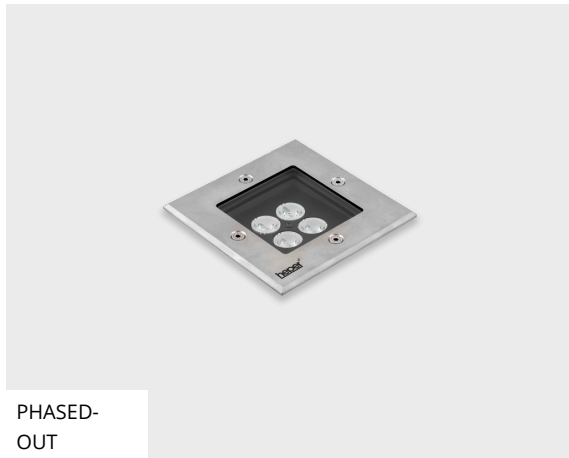

PHASED-  
OUT

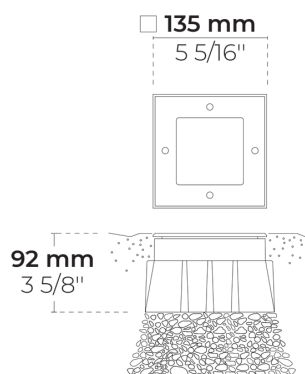

[EL]  
Elliptical

## Configuration

|                       |               |
|-----------------------|---------------|
| Light distribution    | [EL] 20x65°   |
| Delivered lumens flux | 650 lm        |
| Rated input power     | 6 W           |
| Color temperature     | 4000 K CRI 70 |
| Luminaire efficacy    | 108 lm/W      |
| Lamp                  | 4 LED         |
| Color Deviation       | 3 SDCM        |
| Lifetime L90 (hour)   | >145,000      |
| Lifetime L80 (hour)   | >145,000      |


## Options

## Technical information

|                         |                                                              |
|-------------------------|--------------------------------------------------------------|
| Housing                 | Corrosion resistant, die-cast, marine grade aluminum housing |
| Fasteners               | Stainless steel (AISI 304 / EN 1.4301 grade)                 |
| Gasket                  | Silicone                                                     |
| Lens / Reflector        | PMMA lens with high optical efficiency                       |
| Glass / Diffusor        | Tempered safety glass                                        |
| Impact protection       | IK08                                                         |
| Ingress protection      | IP67                                                         |
| Input voltage           | 220-240V 50/60Hz                                             |
| Insulation class        | Class I                                                      |
| Weight                  | 1.9 kg                                                       |
| LED module              | High power LEDs on metal-core PCB                            |
| Driver                  | Internal LED driver                                          |
| Driver surge protection | 3/3 kV                                                       |
| Power factor            | > 0.40                                                       |
| Through wiring          | Single power cord entry                                      |
| Operating temperature   | -40...50°C                                                   |
| Power cord              | 12" of rubber-sheathed power cord                            |

Accessories (Included)

Mounting accessories



Plastic sleeve for  
WEDGE

160401047/6

Accessories (To be ordered separately)


Mounting accessories



Case removing  
vacuum

160404012

Mounting accessories



Connector set - 5-  
pole

141407400

|                                              |  |  |      |  |      |  |          |  |
|----------------------------------------------|--|--|------|--|------|--|----------|--|
| Project name                                 |  |  |      |  | Type |  | Quantity |  |
| Date                                         |  |  | Note |  |      |  |          |  |
| LR9003.530-EN-ASYM-20x65-350-740-ONOFF-__-__ |  |  |      |  |      |  |          |  |

| Light distribution                                | Rated input power                                | Color temperature                                                                              | Control                  | Product colors                                                                                                                            |
|---------------------------------------------------|--------------------------------------------------|------------------------------------------------------------------------------------------------|--------------------------|-------------------------------------------------------------------------------------------------------------------------------------------|
| <b>[EL]</b><br>Elliptical - 20x65°                | <b>[350]</b><br>6 W                              | <b>[740]</b><br>4000 K CRI 70                                                                  | <b>[ONOFF]</b><br>On/Off | <b>[HM1]</b> <br>Black                                 |
| <b>[VN]</b><br>Very narrow - NEMA<br>Type 1 - 10° |                                                  | <b>[830]</b><br>3000 K CRI 80                                                                  |                          | <b>[HM2]</b> <br>Dark gray                             |
|                                                   |                                                  |                                                                                                |                          | <b>[HM3]</b> <br>Anthracite gray                       |
|                                                   |                                                  |                                                                                                |                          | <b>[HM4]</b> <br>Light gray                            |
|                                                   |                                                  |                                                                                                |                          | <b>[HM5]</b> <br>White                                 |
|                                                   |                                                  |                                                                                                |                          | <b>[HM6]</b> <br>Bronze                                |
|                                                   |                                                  |                                                                                                |                          | <b>[9006]</b> <br>White aluminium (RAL 9006)           |
|                                                   |                                                  |                                                                                                |                          | <b>[CC]</b> <br>Custom color (Please specify RAL code) |
| Extras                                            | Accessories<br><i>(Included)</i>                 | Accessories <i>(To be ordered separately)</i>                                                  |                          |                                                                                                                                           |
| Consult the factory                               | Mounting accessories                             | Mounting accessories                                                                           |                          |                                                                                                                                           |
| <b>[UNI]</b><br>120-277V 50/60Hz                  | <b>[160401047/6]</b><br>Plastic sleeve for WEDGE | <b>[160404012]</b><br>Case removing vacuum<br><br><b>[141407400]</b><br>Connector set - 5-pole |                          |                                                                                                                                           |