



WEDGE



LR9003.531-EN-VN-350-740-ONOFF

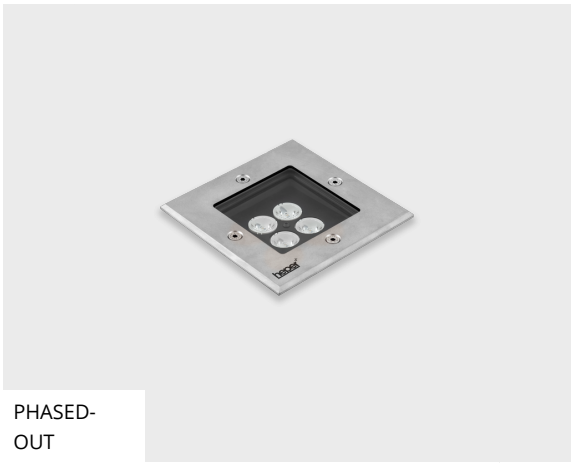

PHASED-
OUT

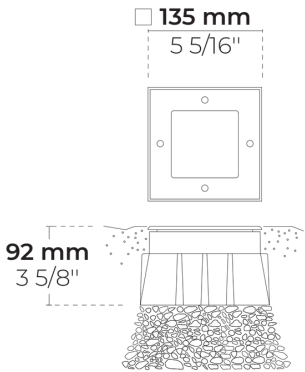

[VN]
Very narrow - NEMA
Type 1

Configuration

| | |
|-----------------------|---------------|
| Light distribution | [VN] 10° |
| Delivered lumens flux | 594 lm |
| Rated input power | 6 W |
| Color temperature | 4000 K CRI 70 |
| Luminaire efficacy | 99 lm/W |
| Lamp | 4 LED |
| Color Deviation | 3 SDCM |
| Lifetime L90 (hour) | >145,000 |
| Lifetime L80 (hour) | >145,000 |


Options

Technical information

| | |
|-------------------------|--|
| Housing | Corrosion resistant, die-cast, marine grade aluminum housing |
| Fasteners | Stainless steel (AISI 304 / EN 1.4301 grade) |
| Gasket | Silicone |
| Lens / Reflector | PMMA lens with high optical efficiency |
| Glass / Diffuser | Tempered safety glass |
| Impact protection | IK08 |
| Ingress protection | IP67 |
| Input voltage | 220-240V 50/60Hz |
| Insulation class | Class I |
| Weight | 1.9 kg |
| LED module | High power LEDs on metal-core PCB |
| Driver | Internal LED driver |
| Driver surge protection | 3/3 kV |
| Power factor | > 0.40 |
| Through wiring | Single power cord entry |
| Operating temperature | -40...50°C |
| Power cord | 12" of rubber-sheathed power cord |

Accessories (Included)

Mounting accessories



Plastic sleeve for
WEDGE

160401047/6

Accessories (To be ordered separately)


Mounting accessories



Case removing
vacuum

160404012









Mounting accessories



Connector set - 5-
pole

141407400

| | | | | | | | | |
|--|--|--|------|--|------|--|----------|--|
| Project name | | | | | Type | | Quantity | |
| Date | | | Note | | | | | |
| LR9003.531-EN-VN-350-740-ONOFF-__ - __ | | | | | | | | |

| Light distribution | Rated input power | Color temperature | Control | Product colors |
|---|--|--|--------------------------|---|
| [VN] Very narrow - NEMA Type 1 - 10° | [350] 6 W | [740] 4000 K CRI 70 | [ONOFF] On/Off | [HM1]  Black |
| [EL] Elliptical - 20x65° | | [830] 3000 K CRI 80 | | [HM2]  Dark gray |
| | | | | [HM3]  Anthracite gray |
| | | | | [HM4]  Light gray |
| | | | | [HM5]  White |
| | | | | [HM6]  Bronze |
| | | | | [9006]  White aluminium (RAL 9006) |
| | | | | [CC]  Custom color (Please specify RAL code) |
| Extras | Accessories <i>(Included)</i> | Accessories <i>(To be ordered separately)</i> | | |
| Consult the factory | Mounting accessories | Mounting accessories | | |
| [UNI] 120-277V 50/60Hz | [160401047/6] Plastic sleeve for WEDGE | [160404012] Case removing vacuum [141407400] Connector set - 5-pole | | |