



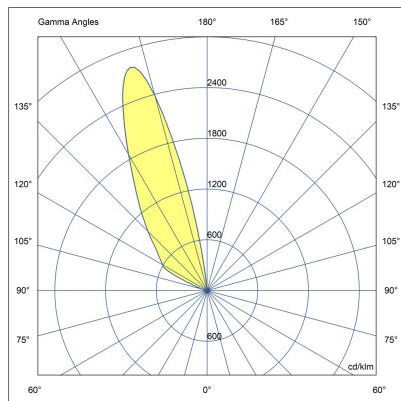

LR9005.524-US-WW-350-830-UNI-C1-SS

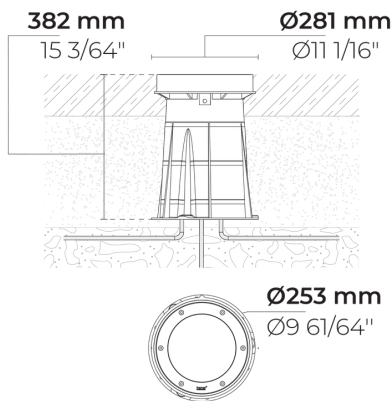

[WW]  
Wall-wash

## Variant

|                        |               |
|------------------------|---------------|
| Light distribution     | [WW] 49x33°   |
| Delivered lumens flux  | 818 lm        |
| Rated input power      | 10 W          |
| Colour temperature     | 3000 K CRI 80 |
| Luminaire efficacy     | 81 lm/W       |
| Lamp                   | 4 LED         |
| MacAdam Ellipse        | 3 SDCM        |
| Lifetime L90B50 (hour) | >42,000       |
| Lifetime L80B50 (hour) | >42,000       |


## Options

## Technical information

|                         |                                                                           |
|-------------------------|---------------------------------------------------------------------------|
| Mounting                | Ground recessed mountable                                                 |
| Housing                 | Corrosion resistant stainless steel housing (AISI 316L / EN 1.4571 grade) |
| Fasteners               | Stainless steel (AISI 304 / EN 1.4301 grade)                              |
| Gasket                  | Silicone                                                                  |
| Lens / Reflector        | High reflectance aluminium coating, multifaceted micro reflector          |
| Glass / Diffusor        | Tempered safety glass                                                     |
| Impact protection       | IK10                                                                      |
| Ingress protection      | IP67                                                                      |
| Input voltage           | 120-277V 50/60Hz                                                          |
| Insulation class        | Class I                                                                   |
| Weight                  | 15 lbs                                                                    |
| LED module              | High power LEDs on metal-core PCB                                         |
| Driver                  | Internal LED driver                                                       |
| Driver surge protection | 2/2 kV                                                                    |
| Power factor            | > 0.90                                                                    |
| Through wiring          | Single cable entry                                                        |
| Operating temperature   | -30...50°C                                                                |
| Cable                   | 0.3 m of rubber-sheathed cable                                            |

## Accessories (Included)

### Mounting accessories



**Connector set - 5-pole**

141407400

## Accessories (To be ordered separately)


### Mounting accessories



**Case removing vacuum**

160404012

### Mounting accessories



**Plastic case for ZEROX**

007501028

|                                       |  |      |  |          |  |
|---------------------------------------|--|------|--|----------|--|
| Project name                          |  | Type |  | Quantity |  |
| Date                                  |  | Note |  |          |  |
| LR9005.524-US-WW-350-830-__-UNI-C1-SS |  |      |  |          |  |

| Light distribution                           | Rated input power                                                                          | Colour temperature                                                                              | Control                  | Product colours                                                                                                    |
|----------------------------------------------|--------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------|--------------------------|--------------------------------------------------------------------------------------------------------------------|
| <b>[WW]</b><br>Wall-wash - 49x33°            | <b>[350]</b><br>10 W                                                                       | <b>[830]</b><br>3000 K CRI 80                                                                   | <b>[ONOFF]</b><br>On/Off | <b>[SS]</b><br>Stainless steel  |
|                                              |                                                                                            | <b>[827]</b><br>2700 K CRI 80<br><b>[740]</b><br>4000 K CRI 70<br><b>[840]</b><br>4000 K CRI 80 | <b>[0-10V]</b><br>0-10V  |                                                                                                                    |
| <b>Accessories (Included)</b>                | <b>Accessories (To be ordered separately)</b>                                              |                                                                                                 |                          |                                                                                                                    |
| <b>Mounting accessories</b>                  | <b>Mounting accessories</b>                                                                |                                                                                                 |                          |                                                                                                                    |
| <b>[141407400]</b><br>Connector set - 5-pole | <b>[160404012]</b><br>Case removing vacuum<br><b>[007501028]</b><br>Plastic case for ZEROX |                                                                                                 |                          |                                                                                                                    |