
IK08 IP67 🕘



LR9012.583-US-WW-350-830-UNI-C1-SS



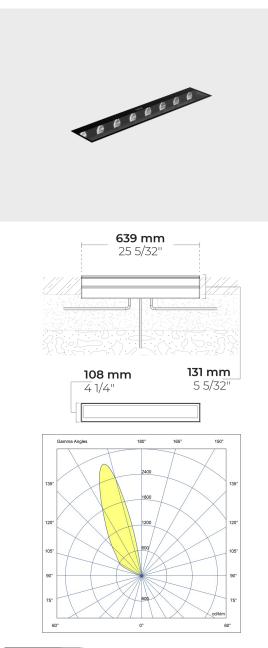

Variant

Light distribution	[WW] 45x85°
Delivered lumens flux	1642 lm
Rated input power	20 W
Colour temperature	3000 K CRI 80
Luminaire efficacy	82 lm/W
Lamp	8 LED
MacAdam Ellipse	3 SDCM
Lifetime L90B50 (hour)	>42,000
Lifetime L80B50 (hour)	>42,000

Options

Cable

Technical information

Mounting	Ground recessed mountable
0	
Housing	Corrosion resistant stainless steel housing (AISI
	316L / EN 1.4571 grade)
Fasteners	Stainless steel (AISI 304 / EN 1.4301 grade)
Gasket	Silicone
Lens / Reflector	High reflectance aluminium coating,
	multifaceted micro reflector
Glass / Diffusor	Tempered safety glass
Impact protection	IK08
Ingress protection	IP67
Input voltage	120-277V 50/60Hz
Insulation class	Class I
Weight	12 lbs
LED module	High power LEDs on metal-core PCB
Driver	Internal LED driver
Driver surge	2/2 kV
protection	
Power factor	> 0.90
Through wiring	Single cable entry
Operating	-3050°C
temperature	
•	

0.3 m of rubber-sheated cable

HPR Pazarlama A.Ş.


Başkent OSB 22. Cd. No: 2, Malıköy, Temelli, Sincan, 06909 Ankara, Turkey +90 312 267 54 30 info@hepergroup.com

HEPER Europe GmbH

Ahornweg 5a, 58675 Hemer, Germany +49 237 2901 2975 infoEU@hepergroup.com We reserve the right to change specifications without prior written notice. Edition: 17.05.2024. For current version visit heperlighting.com. All flux (±%7 tolerance) and power values (±%10 tolerance) are derived following appropriate IES, CIE, and applicable standards.

Accessories (Included)

Accessories (To be ordered separately)



007500618

141407400

Mounting accessories



Case removing vacuum

160404012

HPR Pazarlama A.Ş. Başkent OSB 22. Cd. No: 2, Malıköy, Temelli, Sincan, 06909 Ankara, Turkey +90 312 267 54 30 info@hepergroup.com

HEPER Europe GmbH

Ahornweg 5a, 58675 Hemer, Germany +49 237 2901 2975 infoEU@hepergroup.com We reserve the right to change specifications without prior written notice. Edition: 17.05.2024. For current version visit heperlighting.com. All flux (±%7 tolerance) and power values (±%10 tolerance) are derived following appropriate IES, CIE, and applicable standards.

2/3

Project na	me				Туре	Quantity	
Date			Note				
LR9012.	583-US-W	/W-350-8	30UN	II-C1-SS			

ght distribution	Rated input power	Colour temperature	Control	Product colours
	[350] 20 W	[830] 3000 K CRI 80	[ONOFF] On/Off	[SS] Stainless steel
		[827] 2700 K CRI 80	[0-10V] 0-10V	
		[740] 4000 K CRI 70		
		[840] 4000 K CRI 80		
	Accessories (To be ordered separately)			
	Mounting accessories			
uminium case for	[160404012] Case removing vacuum			
11407400] nnector set - 5-pole				

HEPER Europe GmbH

Ahornweg 5a, 58675 Hemer, Germany +49 237 2901 2975 infoEU@hepergroup.com We reserve the right to change specifications without prior written notice. Edition: 17.05.2024. For current version visit heperlighting.com. All flux (±%7 tolerance) and power values (±%10 tolerance) are derived following appropriate IES, CIE, and applicable standards.