

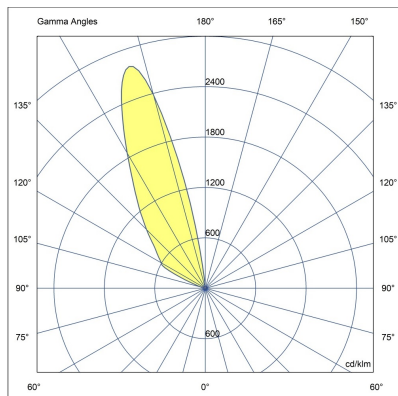


ZETA 12 Dyno

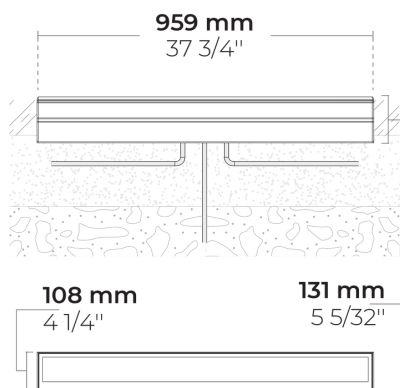

LR9012.584-EN-WW-350-740-SS

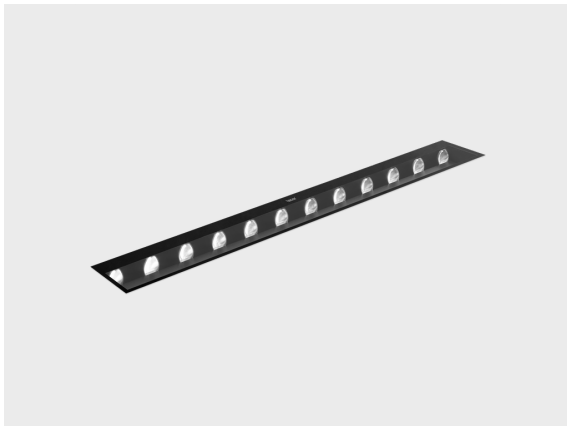

[WW]
Wall-wash

Configuration

Light distribution	[WW] 45x85°
Delivered lumens flux	2799 lm
Rated input power	30 W
Color temperature	4000 K CRI 70
Luminaire efficacy	93 lm/W
Lamp	12 LED
Color Deviation	3 SDCM
Lifetime L90 (hour)	>42,000
Lifetime L80 (hour)	>42,000

Options

Technical information

Mounting	Ground recessed mountable
Housing	Corrosion resistant stainless steel housing (AISI 316L / EN 1.4571 grade)
Fasteners	Stainless steel (AISI 304 / EN 1.4301 grade)
Gasket	Silicone
Lens / Reflector	High reflectance aluminium coating, multifaceted micro reflector
Glass / Diffusor	Tempered safety glass
Impact protection	IK08
Ingress protection	IP67
Input voltage	220-240V 50/60Hz
Insulation class	Class I
Weight	7.88 kg
LED module	High power LEDs on metal-core PCB
Driver	Internal LED driver
Driver surge protection	4/4 kV
Power factor	> 0.97
Through wiring	Single power cord entry
Operating temperature	-40...50°C
Power cord	12" of rubber-sheathed power cord

Accessories (Included)

Mounting accessories



Aluminium case
for ZETA 12 Dyno /
MOLTO 6 Hybrid
007500402


Accessories (To be ordered separately)

Mounting accessories




Case removing
vacuum
160404012

Mounting accessories



Connector set - 5-
pole
141407400

Mounting accessories



Junction Box
141901135

Project name					Type		Quantity	
Date			Note					
LR9012.584-EN-WW-350-740-__-SS								

Light distribution	Rated input power	Color temperature	Control	Product colors
[WW] Wall-wash - 45x85°	[350] 30 W	[740] 4000 K CRI 70	[ONOFF] On/Off	[SS] Stainless steel 
		[827] 2700 K CRI 80 [830] 3000 K CRI 80 [840] 4000 K CRI 80	[DALI] DALI	
Accessories <i>(Included)</i>	Accessories (To be ordered separately)			
Mounting accessories	Mounting accessories			
[007500402] Aluminium case for ZETA 12 Dyno / MOLTO 6 Hybrid	[160404012] Case removing vacuum [141407400] Connector set - 5-pole [141901135] Junction Box			