

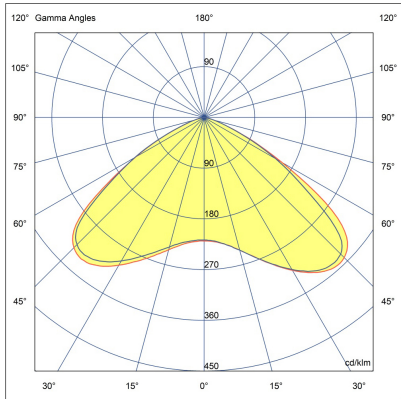


# C-LIGHT AFX 2 Module

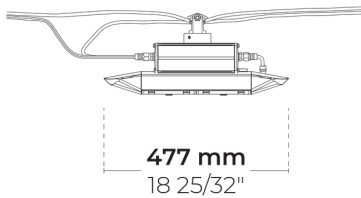

LC2029.862-EN-T5-350-827

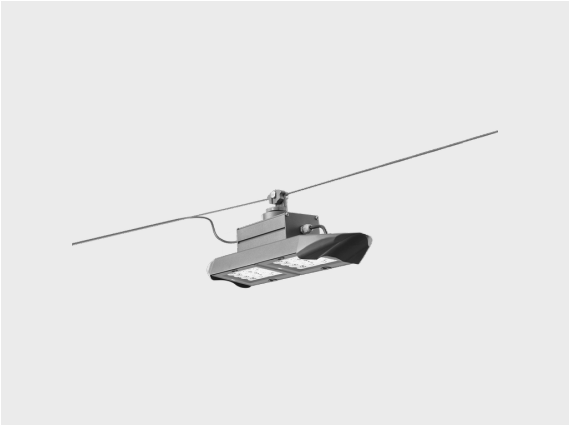

[T5]  
Type V

## Configuration




|                       |               |
|-----------------------|---------------|
| Light distribution    | [T5] 117°     |
| Delivered lumens flux | 4140 lm       |
| Rated input power     | 34 W          |
| Color temperature     | 2700 K CRI 80 |
| Luminaire efficacy    | 122 lm/W      |
| Lamp                  | 32 LED        |
| Color Deviation       | 3 SDCM        |
| BUG rating            | B2-U0-G0      |
| Lifetime L90 (hour)   | >102,000      |
| Lifetime L80 (hour)   | >102,000      |

## Options

## Technical information

|                         |   |
|-------------------------|---|
| Mounting                | Catenary wire mounting  |
| Housing                 | Corrosion resistant, die-cast, marine grade aluminum housing  |
| Finishing               | Chromate conversion pretreatment followed by electrostatic powder coating                           |
| Fasteners               | Stainless steel (AISI 304 / EN 1.4301 grade)  |
| Gasket                  | Liquid silicone   |
| Lens / Reflector        | PMMA lens with high optical efficiency  |
| Glass / Diffusor        | Tempered safety glass   |
| Impact protection       | IK08  |
| Ingress protection      | IP66  |
| Input voltage           | 220-240V 50/60Hz  |
| Insulation class        | Class I   |
| Weight                  | 3.25 kg   |
| LED module              | High power LEDs on metal-core PCB   |
| Driver                  | Internal LED driver   |
| Driver surge protection | 10/6 kV   |
| Power factor            | > 0.95  |
| Through wiring          | Single power cord entry   |
| Operating temperature   | -40...50°C  |
| Power cord              | 40" of halogen-free power cord  |
| Packing box dimensions  | 48*20*25 cm   |
| Notes                   | This product can be supplied with Insulation class (Class II) upon request. Please contact factory. |

|                                      |  |      |  |      |  |          |  |
|--------------------------------------|--|------|--|------|--|----------|--|
| Project name                         |  |      |  | Type |  | Quantity |  |
| Date                                 |  | Note |  |      |  |          |  |
| LC2029.862-EN-T5-350-827-__-__-__-__ |  |      |  |      |  |          |  |

| Light distribution                    | Rated input power    | Color temperature             | Control                  | Product colors  |
|---------------------------------------|----------------------|-------------------------------|--------------------------|---|
| <b>[T5]</b><br>Type V - 117°          | <b>[350]</b><br>34 W | <b>[827]</b><br>2700 K CRI 80 | <b>[ONOFF]</b><br>On/Off | <b>[HM3]</b> <br>Anthracite gray                       |
|                                       | <b>[500]</b><br>48 W | <b>[830]</b><br>3000 K CRI 80 | <b>[DALI]</b><br>DALI    | <b>[HM4]</b> <br>Light gray                            |
|                                       | <b>[700]</b><br>67 W | <b>[740]</b><br>4000 K CRI 70 | <b>[AUTO]</b><br>AutoDIM | <b>[CC]</b> <br>Custom color (Please specify RAL code) |
|                                       |                      | <b>[840]</b><br>4000 K CRI 80 | <b>[STEP]</b><br>StepDIM |   |
| <b>Extras</b>                         |                      |                               |                          |   |
| <b>Consult the factory</b>            |                      |                               |                          |   |
| <b>[C2]</b><br>Class II               |                      |                               |                          |   |
| <b>[UNI]</b><br>120-277V 50/60Hz      |                      |                               |                          |   |
| <b>Luminaire body options</b>         |                      |                               |                          |   |
| <b>[DPC]</b><br>Double powder coating |                      |                               |                          |   |