

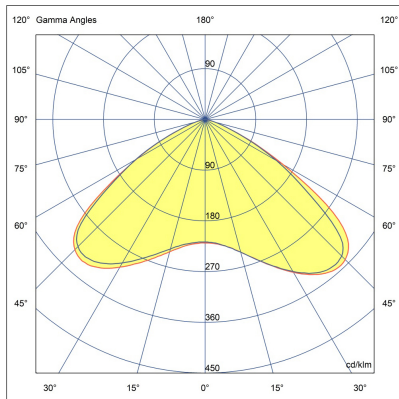


# C-LIGHT AFX 2 Module

CE UK CA IK08 IP66

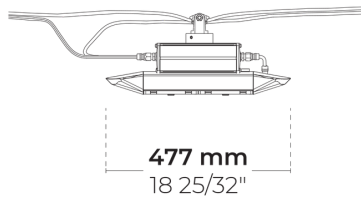

LC2029.862-EN-T5-700-740-EN-C1

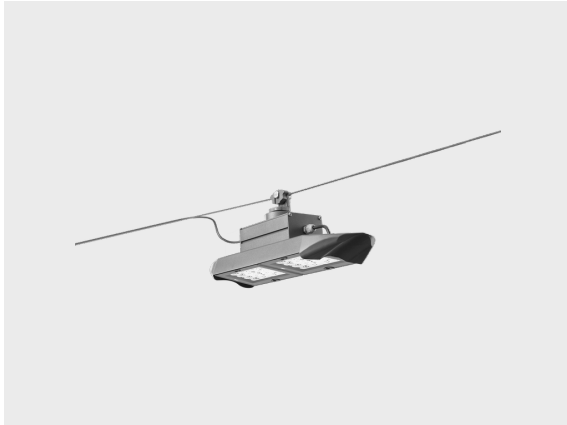

[T5]

Type V, Symmetric

## Variant

|                        |               |
|------------------------|---------------|
| Light distribution     | [T5] 117°     |
| Delivered lumens flux  | 9035 lm       |
| Rated input power      | 67 W          |
| Colour temperature     | 4000 K CRI 70 |
| Luminaire efficacy     | 134 lm/W      |
| Lamp                   | 32 LED        |
| MacAdam Ellipse        | 4 SDCM        |
| BUG rating             | B3-U0-G1      |
| Lifetime L90B50 (hour) | >102,000      |
| Lifetime L80B50 (hour) | >102,000      |

## Options

## Technical information

|                         |                                                                                                     |
|-------------------------|-----------------------------------------------------------------------------------------------------|
| Mounting                | Catenary wire mounting                                                                              |
| Housing                 | Corrosion resistant, die-cast, marine grade aluminum housing                                        |
| Finishing               | Chromate conversion pretreatment followed by electrostatic powder coating                           |
| Fasteners               | Stainless steel (AISI 304 / EN 1.4301 grade)                                                        |
| Gasket                  | Liquid silicone                                                                                     |
| Lens / Reflector        | PMMA lens with high optical efficiency                                                              |
| Glass / Diffusor        | Tempered safety glass                                                                               |
| Impact protection       | IK08                                                                                                |
| Ingress protection      | IP66                                                                                                |
| Input voltage           | 220-240V 50/60Hz                                                                                    |
| Insulation class        | Class I                                                                                             |
| Weight                  | 3.25 kg                                                                                             |
| LED module              | High power LEDs on metal-core PCB                                                                   |
| Driver                  | Internal LED driver                                                                                 |
| Driver surge protection | 10/6 kV                                                                                             |
| Power factor            | > 0.95                                                                                              |
| Through wiring          | Single cable entry                                                                                  |
| Operating temperature   | -40...50°C                                                                                          |
| Cable                   | 1 m of halogen-free cable                                                                           |
| Packing box dimensions  | 48*20*25 cm                                                                                         |
| Notes                   | This product can be supplied with Insulation class (Class II) upon request. Please contact factory. |

HPR Pazarlama A.Ş.  
Başkent OSB 22. Cd. No: 2, Malıköy, Temelli,  
Sincan, 06909 Ankara, Turkey  
+90 312 267 54 30  
info@hepergroup.com

HEPER Europe GmbH  
Ahornweg 5a, 58675  
Hemer, Germany  
+49 237 2901 2975  
infoEU@hepergroup.com

We reserve the right to change specifications without prior written notice. Edition: 04.05.2024.  
For current version visit [heperlighting.com](http://heperlighting.com). All flux (±7% tolerance) and power values (±10% tolerance) are derived following appropriate IES, CIE, and applicable standards.

|                                            |  |      |  |          |  |
|--------------------------------------------|--|------|--|----------|--|
| Project name                               |  | Type |  | Quantity |  |
| Date                                       |  | Note |  |          |  |
| LC2029.862-EN-T5-700-740-__-EN-C1-__-__-__ |  |      |  |          |  |

| Light distribution                      | Rated input power    | Colour temperature            | Control                  | Product colours                                                                                                                            |
|-----------------------------------------|----------------------|-------------------------------|--------------------------|--------------------------------------------------------------------------------------------------------------------------------------------|
| <b>[T5]</b><br>Type V, Symmetric - 117° | <b>[700]</b><br>67 W | <b>[740]</b><br>4000 K CRI 70 | <b>[ONOFF]</b><br>On/Off | <b>[HM3]</b> <br>Anthracite grey                        |
|                                         | <b>[350]</b><br>34 W | <b>[827]</b><br>2700 K CRI 80 | <b>[DALI]</b><br>DALI    | <b>[HM4]</b> <br>Light grey                             |
|                                         | <b>[500]</b><br>48 W | <b>[830]</b><br>3000 K CRI 80 | <b>[AUTO]</b><br>AutoDIM | <b>[CC]</b> <br>Custom colour (Please specify RAL code) |
|                                         |                      | <b>[840]</b><br>4000 K CRI 80 | <b>[STEP]</b><br>StepDIM |                                                                                                                                            |
| Extras                                  |                      |                               |                          |                                                                                                                                            |
| Consult the factory                     |                      |                               |                          |                                                                                                                                            |
| <b>[C2]</b><br>Class II                 |                      |                               |                          |                                                                                                                                            |
| <b>[UNI]</b><br>120-277V 50/60Hz        |                      |                               |                          |                                                                                                                                            |
| <b>Luminaire body options</b>           |                      |                               |                          |                                                                                                                                            |
| <b>[DPC]</b><br>Double powder coating   |                      |                               |                          |                                                                                                                                            |