



# ZEROX S Dyno

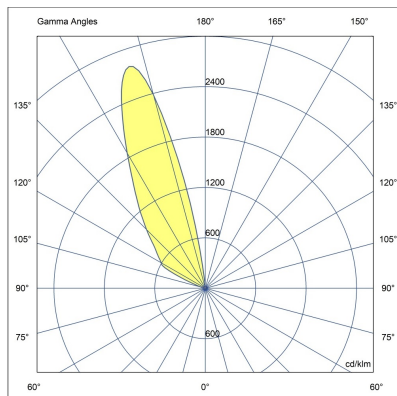

LR9016.521-EN-WW-350-740-SS

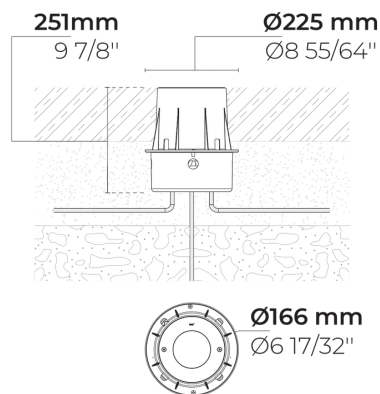

[WW]  
Wall-wash

## Configuration

<b>Light distribution</b>	[WW] 46x25°
<b>Delivered lumens flux</b>	345 lm
<b>Rated input power</b>	4 W
<b>Color temperature</b>	4000 K CRI 70
<b>Luminaire efficacy</b>	86 lm/W
<b>Lamp</b>	1 LED
<b>Color Deviation</b>	3 SDCM
<b>Lifetime L90 (hour)</b>	>42,000
<b>Lifetime L80 (hour)</b>	>42,000

## Options

## Technical information

<b>Mounting</b>	Ground recessed mountable
<b>Housing</b>	Corrosion resistant stainless steel housing (AISI 316L / EN 1.4571 grade)
<b>Fasteners</b>	Stainless steel (AISI 304 / EN 1.4301 grade)
<b>Gasket</b>	Silicone
<b>Lens / Reflector</b>	High reflectance aluminium coating, multifaceted micro reflector
<b>Glass / Diffusor</b>	Tempered safety glass
<b>Impact protection</b>	IK10
<b>Ingress protection</b>	IP67
<b>Input voltage</b>	220-240V 50/60Hz
<b>Insulation class</b>	Class I
<b>Weight</b>	2.81 kg
<b>LED module</b>	High power LEDs on metal-core PCB
<b>Driver</b>	Internal LED driver
<b>Driver surge protection</b>	3/3 kV
<b>Power factor</b>	> 0.40
<b>Through wiring</b>	Single power cord entry
<b>Operating temperature</b>	-40...50°C
<b>Power cord</b>	12" of rubber-sheated power cord
<b>Notes</b>	QUICK SHIP: Some variants will be delivered faster. Please consult the factory.

# Accessories (To be ordered separately)

---

Mounting accessories    Mounting accessories



**Case removing vacuum**


160404012



**Plastic case for ZEROX S**

007502091

Project name				Type		Quantity	
Date		Note					
LR9016.521-EN-WW-350-740-__-SS-__							

Light distribution	Rated input power	Color temperature	Control	Product colors
<b>[WW]</b> Wall-wash - 46x25°	<b>[350]</b> 4 W	<b>[740]</b> 4000 K CRI 70	<b>[ONOFF]</b> On/Off	<b>[SS]</b> Stainless steel 
		<b>[827]</b> 2700 K CRI 80  <b>[830]</b> 3000 K CRI 80  <b>[840]</b> 4000 K CRI 80	<b>[DALI]</b> DALI	
<b>Extras</b>	<b>Accessories (<i>To be ordered separately</i>)</b>			
<b>Consult the factory</b>	<b>Mounting accessories</b>			
<b>[UNI]</b> 120-277V 50/60Hz	<b>[160404012]</b> Case removing vacuum  <b>[007502091]</b> Plastic case for ZEROX S			