



# ZEROX S Dyno

CE UK CA IK10 IP67

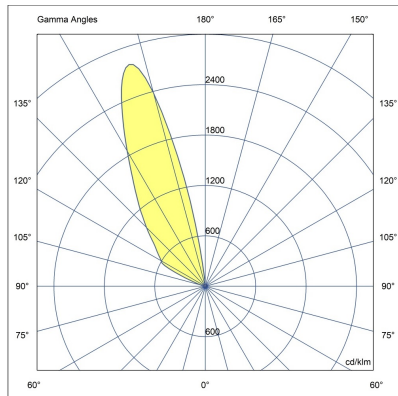

LR9016.521-EN-WW-350-830-EN-C1-SS

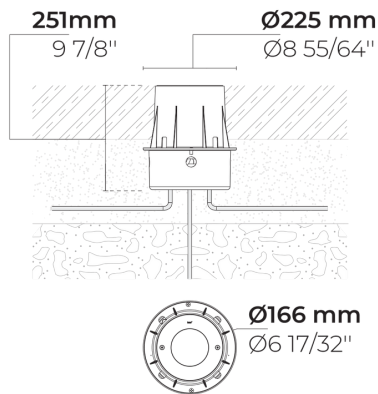

[WW]  
Wall-wash

## Variant

Light distribution	[WW] 46x25°
Delivered lumens flux	303 lm
Rated input power	4 W
Colour temperature	3000 K CRI 80
Luminaire efficacy	75 lm/W
Lamp	1 LED
MacAdam Ellipse	3 SDCM
Lifetime L90B50 (hour)	>42,000
Lifetime L80B50 (hour)	>42,000

## Options

## Technical information

Mounting	Ground recessed mountable
Housing	Corrosion resistant stainless steel housing (AISI 316L / EN 1.4571 grade)
Fasteners	Stainless steel (AISI 304 / EN 1.4301 grade)
Gasket	Silicone
Lens / Reflector	High reflectance aluminium coating, multifaceted micro reflector
Glass / Diffusor	Tempered safety glass
Impact protection	IK10
Ingress protection	IP67
Input voltage	220-240V 50/60Hz
Insulation class	Class I
Weight	2.81 kg
LED module	High power LEDs on metal-core PCB
Driver	Internal LED driver
Driver surge protection	3/3 kV
Power factor	> 0.40
Through wiring	Single cable entry
Operating temperature	-40...50°C
Cable	0.3 m of rubber-sheathed cable
Notes	QUICK SHIP: Some variants will be delivered faster. Please consult the factory.

HPR Pazarlama A.Ş.  
Başkent OSB 22. Cd. No: 2, Malıköy, Temelli,  
Sincan, 06909 Ankara, Turkey  
+90 312 267 54 30  
info@hepergroup.com

HEPER Europe GmbH  
Ahornweg 5a, 58675  
Hemer, Germany  
+49 237 2901 2975  
infoEU@hepergroup.com

We reserve the right to change specifications without prior written notice. Edition: 02.05.2024.  
For current version visit [heperlighting.com](http://heperlighting.com). All flux (±7% tolerance) and power values (±10% tolerance) are derived following appropriate IES, CIE, and applicable standards.

## Accessories (To be ordered separately)

---


Mounting accessories



**Case removing vacuum**

160404012


Mounting accessories



**Plastic case for ZEROX S**

007502091

Project name		Type		Quantity	
Date		Note			
LR9016.521-EN-WW-350-830-__-EN-C1-SS-__					

Light distribution	Rated input power	Colour temperature	Control	Product colours
<b>[WW]</b> Wall-wash - 46x25°	<b>[350]</b> 4 W	<b>[830]</b> 3000 K CRI 80	<b>[ONOFF]</b> On/Off	<b>[SS]</b> Stainless steel 
		<b>[827]</b> 2700 K CRI 80 <b>[740]</b> 4000 K CRI 70 <b>[840]</b> 4000 K CRI 80	<b>[DALI]</b> DALI	
<b>Extras</b>	<b>Accessories (<i>To be ordered separately</i>)</b>			
<b>Consult the factory</b>	<b>Mounting accessories</b>			
<b>[UNI]</b> 120-277V 50/60Hz	<b>[160404012]</b> Case removing vacuum <b>[007502091]</b> Plastic case for ZEROX S			