



ZEROX S Hybrid

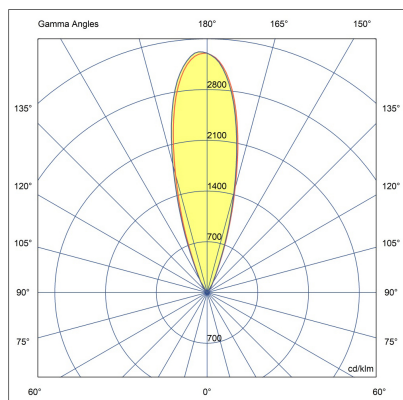

LR9016.693-EN-N-700-740-SS

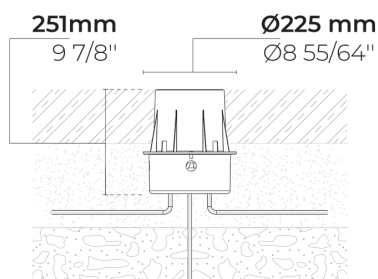

[N]

Narrow - NEMA Type 2

Configuration

Light distribution	[N] 26°
Delivered lumens flux	1019 lm
Rated input power	10 W
Color temperature	4000 K CRI 70
Luminaire efficacy	101 lm/W
Lamp	1 LED
Color Deviation	5 SDCM
Lifetime L90 (hour)	>72,600
Lifetime L80 (hour)	>72,600

Options

Technical information


Mounting	Ground recessed mountable
Housing	Corrosion resistant stainless steel housing (AISI 316L / EN 1.4571 grade)
Fasteners	Stainless steel (AISI 304 / EN 1.4301 grade)
Gasket	Silicone
Lens / Reflector	High reflectance aluminium coating
Glass / Diffuser	Tempered safety glass
Impact protection	IK10
Ingress protection	IP67
Input voltage	220-240V 50/60Hz
Insulation class	Class I
Weight	2.81 kg
LED module	Multi-chip high power LEDs on metal-core PCB
Driver	Internal LED driver
Driver surge protection	1/1 kV
Power factor	> 0.91
Through wiring	Single power cord entry
Operating temperature	-25...50°C
Power cord	12" of rubber-sheathed power cord

Accessories (To be ordered separately)


Mounting accessories Mounting accessories Mounting accessories



Case removing vacuum
160404012



Connector set - 5-pole
141407400



Junction Box
141901135

Mounting accessories



Plastic case for ZEROX S
007502091

Project name				Type		Quantity	
Date		Note					

LR9016.693-EN-N-700-740-__-SS-__

Light distribution	Rated input power	Color temperature	Control	Product colors
[N] Narrow - NEMA Type 2 - 26°	[700] 10 W	[740] 4000 K CRI 70	[ONOFF] On/Off	[SS] Stainless steel
[S] Spot - NEMA Type 0 - 7°	[350] 5 W	[827] 2700 K CRI 80	[DALI] DALI	
	[500] 6 W	[830] 3000 K CRI 80		
		[840] 4000 K CRI 80		
Extras	Accessories (<i>To be ordered separately</i>)			
Consult the factory	Mounting accessories			
[UNI] 120-277V 50/60Hz	[160404012] Case removing vacuum			
	[141407400] Connector set - 5-pole			
	[141901135] Junction Box			
	[007502091] Plastic case for ZEROX S			