



# ZEROX S Hybrid

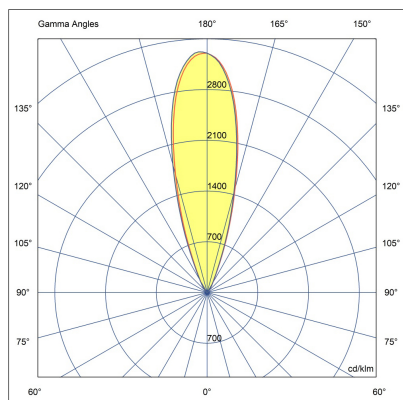

LR9016.693-EN-N-700-830-SS

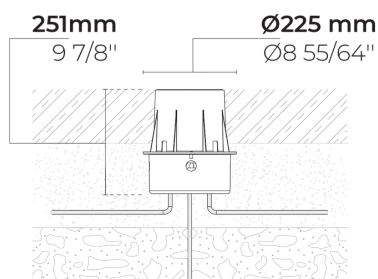

[N]

Narrow - NEMA Type 2

## Configuration

|                       |               |
|-----------------------|---------------|
| Light distribution    | [N] 26°       |
| Delivered lumens flux | 849 lm        |
| Rated input power     | 10 W          |
| Color temperature     | 3000 K CRI 80 |
| Luminaire efficacy    | 84 lm/W       |
| Lamp                  | 1 LED         |
| Color Deviation       | 5 SDCM        |
| Lifetime L90 (hour)   | >72,600       |
| Lifetime L80 (hour)   | >72,600       |

## Options

## Technical information

|                         |   |
|-------------------------|---|
| Mounting                | Ground recessed mountable   |
| Housing                 | Corrosion resistant stainless steel housing (AISI 316L / EN 1.4571 grade) |
| Fasteners               | Stainless steel (AISI 304 / EN 1.4301 grade)                              |
| Gasket                  | Silicone  |
| Lens / Reflector        | High reflectance aluminium coating  |
| Glass / Diffuser        | Tempered safety glass   |
| Impact protection       | IK10  |
| Ingress protection      | IP67  |
| Input voltage           | 220-240V 50/60Hz  |
| Insulation class        | Class I   |
| Weight                  | 2.81 kg   |
| LED module              | Multi-chip high power LEDs on metal-core PCB                              |
| Driver                  | Internal LED driver   |
| Driver surge protection | 1/1 kV  |
| Power factor            | > 0.91  |
| Through wiring          | Single power cord entry   |
| Operating temperature   | -25...50°C  |
| Power cord              | 12" of rubber-sheathed power cord   |


# Accessories (To be ordered separately)

---


Mounting accessories    Mounting accessories    Mounting accessories



**Case removing vacuum**  
160404012



**Connector set - 5-pole**  
141407400



**Junction Box**  
141901135

Mounting accessories



**Plastic case for ZEROX S**  
007502091

|                                  |  |      |  |      |  |          |  |
|----------------------------------|--|------|--|------|--|----------|--|
| Project name                     |  |      |  | Type |  | Quantity |  |
| Date                             |  | Note |  |      |  |          |  |
| LR9016.693-EN-N-700-830-__-SS-__ |  |      |  |      |  |          |  |

| Light distribution                       | Rated input power  | Color temperature   | Control                  | Product colors                 |
|--|--|---|--------------------------|--------------------------------|
| <b>[N]</b><br>Narrow - NEMA Type 2 - 26° | <b>[700]</b><br>10 W   | <b>[830]</b><br>3000 K CRI 80   | <b>[ONOFF]</b><br>On/Off | <b>[SS]</b><br>Stainless steel |
| <b>[S]</b><br>Spot - NEMA Type 0 - 7°    | <b>[350]</b><br>5 W<br><br><b>[500]</b><br>6 W   | <b>[827]</b><br>2700 K CRI 80<br><br><b>[740]</b><br>4000 K CRI 70<br><br><b>[840]</b><br>4000 K CRI 80 | <b>[DALI]</b><br>DALI    |                                |
| Extras                                   | Accessories ( <i>To be ordered separately</i> )  |   |                          |                                |
| Consult the factory                      | Mounting accessories   |   |                          |                                |
| <b>[UNI]</b><br>120-277V 50/60Hz         | <b>[160404012]</b><br>Case removing vacuum<br><br><b>[141407400]</b><br>Connector set - 5-pole<br><br><b>[141901135]</b><br>Junction Box<br><br><b>[007502091]</b><br>Plastic case for ZEROX S |   |                          |                                |