
# **ZEROX S Hybrid**

# CE 🕵 🖳 IK10 IP67



## LR9016.693-EN-S-700-830-EN-C1-SS



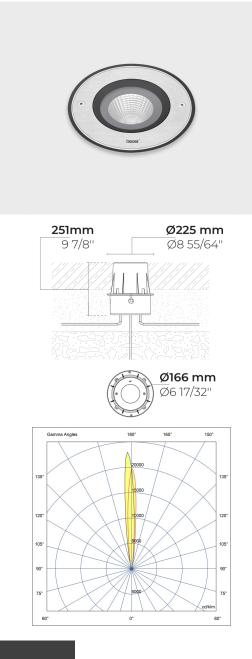

Spot

### Variant

Light distribution	[S] 7°
Delivered lumens flux	849 lm
Rated input power	10 W
Colour temperature	3000 K CRI 80
Luminaire efficacy	84 lm/W
Lamp	1 LED
MacAdam Ellipse	5 SDCM
Lifetime L90B50 (hour)	>72,600
Lifetime L80B50 (hour)	>72,600

### Options

## **Technical information**

Mounting	Ground recessed mountable
Housing	Corrosion resistant stainless steel housing (AISI
0	316L / EN 1.4571 grade)
Fasteners	Stainless steel (AISI 304 / EN 1.4301 grade)
Gasket	Silicone
Lens / Reflector	High reflectance aluminium coating
Glass / Diffusor	Tempered safety glass
Impact protection	IK10
Ingress protection	IP67
Input voltage	220-240V 50/60Hz
Insulation class	Class I
Weight	2.81 kg
LED module	Multi-chip high power LEDs on metal-core PCB
Driver	Internal LED driver
Driver surge	1/1 kV
protection	
Power factor	> 0.91
Through wiring	Single cable entry
Operating	-2550°C
temperature	-2350 C
Cable	0.3 m of rubber-sheated cable
Cable	0.5 III OI TUDDEI-SITEALEU CADIE


#### HPR Pazarlama A.Ş.

Başkent OSB 22. Cd. No: 2, Malıköy, Temelli, Sincan, 06909 Ankara, Turkey +90 312 267 54 30 info@hepergroup.com

#### HEPER Europe GmbH

Ahornweg 5a, 58675 Hemer, Germany +49 237 2901 2975 infoEU@hepergroup.com We reserve the right to change specifications without prior written notice. Edition: 07.05.2024. For current version visit heperlighting.com. All flux (±%7 tolerance) and power values (±%10 tolerance) are derived following appropriate IES, CIE, and applicable standards.

## Accessories (To be ordered separately)

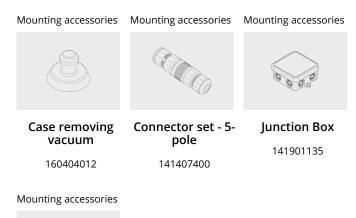



Plastic case for ZEROX S

007502091

HPR Pazarlama A.Ş. Başkent OSB 22. Cd. No: 2, Malıköy, Temelli, Sincan, 06909 Ankara, Turkey +90 312 267 54 30 info@hepergroup.com HEPER Europe GmbH

Ahornweg 5a, 58675 Hemer, Germany +49 237 2901 2975 infoEU@hepergroup.com We reserve the right to change specifications without prior written notice. Edition: 07.05.2024. For current version visit heperlighting.com. All flux (±%7 tolerance) and power values (±%10 tolerance) are derived following appropriate IES, CIE, and applicable standards.

2/3

Project na	me				Туре	Quantity	
Date			Note				
LR9016.	693-EN-S	-700-830-	EN-C1	-SS			

700] 10 W 350] 5 W 500] 5 W Accessories ( <i>To be</i> prdered separately)	[830] 3000 K CRI 80 [827] 2700 K CRI 80 [740] 4000 K CRI 70 [840] 4000 K CRI 80	[ONOFF] On/Off [DALI] DALI	[SS] Stainless steel
5 W 500] 5 W Accessories ( <i>To be</i>	2700 K CRI 80 [740] 4000 K CRI 70 [840]		
Accessories ( <i>To be</i>	4000 K CRI 70 [840]		
Accessories (To be ordered separately)			
Accessories (To be ordered separately)			
Mounting	-		
accessories	-		
[ <b>160404012]</b> Case removing vacuum			
[ <b>141407400]</b> Connector set - 5-pole			
<b>141901135]</b> unction Box			
007502091] Plastic case for ZEROX			
	ase removing acuum 41407400] onnector set - 5-pole 41901135] inction Box 07502091]	ase removing acuum (41407400] onnector set - 5-pole (41901135] Inction Box (07502091]	ase removing acuum [41407400] onnector set - 5-pole [41901135] Inction Box [07502091]

#### HEPER Europe GmbH

Ahornweg 5a, 58675 Hemer, Germany +49 237 2901 2975 infoEU@hepergroup.com We reserve the right to change specifications without prior written notice. Edition: 07.05.2024. For current version visit heperlighting.com. All flux (±%7 tolerance) and power values (±%10 tolerance) are derived following appropriate IES, CIE, and applicable standards.