
ZEROX M Dyno

LR9017.522-EN-WW-350-830-SS





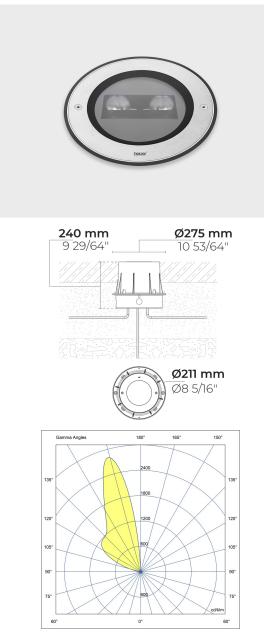

Configuration

Light distribution	[WW] 35x28°
Delivered lumens flux	462 lm
Rated input power	5 W
Color temperature	3000 K CRI 80
Luminaire efficacy	92 lm/W
Lamp	2 LED
Color Deviation	3 SDCM
Lifetime L90 (hour)	>42,000
Lifetime L80 (hour)	>42,000

Options

Power cord


Technical information

Mounting	Ground recessed mountable
Housing	Corrosion resistant stainless steel housing (AISI
	316L / EN 1.4571 grade)
Fasteners	Stainless steel (AISI 304 / EN 1.4301 grade)
Gasket	Silicone
Lens / Reflector	High reflectance aluminium coating,
	multifaceted micro reflector
Glass / Diffusor	Tempered safety glass
Impact protection	IK10
Ingress protection	IP67
Input voltage	220-240V 50/60Hz
Insulation class	Class I
Weight	4.06 kg
LED module	High power LEDs on metal-core PCB
Driver	Internal LED driver
Driver surge	3/3 kV
protection	
Power factor	> 0.40
Through wiring	Single power cord entry
Operating	-4050°C
temperature	

12" of rubber-sheated power cord

HEPER USA LLC W227 N546 Westmound Drive Waukesha, 53186 Wisconsin, United States +1 312 910 9740 infoUS@hepergroup.com

Accessories (To be ordered separately)

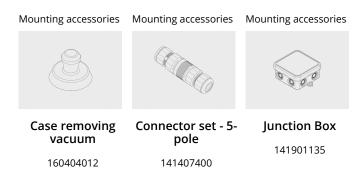

Mounting accessories



Plastic case for ZEROX M

007502092

HEPER USA LLC W227 N546 Westmound Drive Waukesha, 53186 Wisconsin, United States +1 312 910 9740 infoUS@hepergroup.com We reserve the right to change specifications without prior written notice. Edition: 12.05.2024. For current version visit heperlighting.com. All flux (\pm %7 tolerance) and power values (\pm %10 tolerance) are derived following appropriate IES, CIE, and applicable standards.

Project na	me				Туре	Quantity	
Date		Note					
LR9017.	522-EN-W	/W-350-8	30- <u>-</u> -SS-	- <u></u>			

Light distribution	Rated input power	Color temperature	Control	Product colors
[WW] Wall-wash - 35x28°	[350] 5 W	[830] 3000 K CRI 80	[ONOFF] On/Off	[SS] Stainless steel
		[827] 2700 K CRI 80	[DALI] DALI	
		[740] 4000 K CRI 70		
		[840] 4000 K CRI 80		
Extras	Accessories (To be ordered separately)			
Consult the factory	Mounting			
[UNI] 120-277V 50/60Hz	accessories	-		
	[160404012] Case removing vacuum			
	[141407400] Connector set - 5-pole			
	[141901135] Junction Box			
	[007502092] Plastic case for ZEROX M			