



ZEROX M Dyno

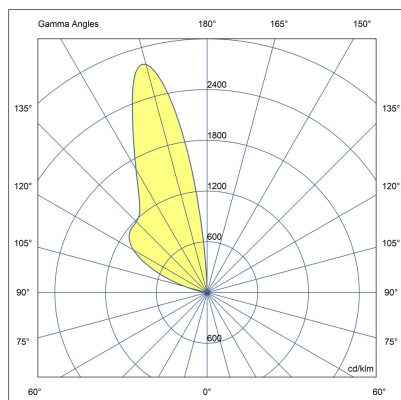

LR9017.522-US-WW-350-740-SS

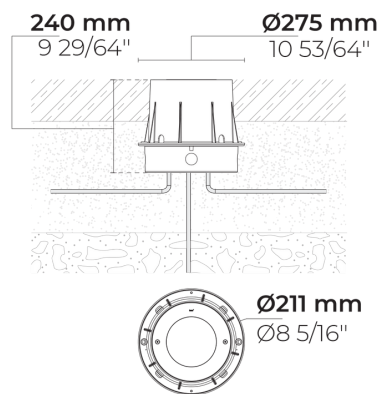

[WW]
Wall-wash

Configuration

| | |
|-----------------------|---------------|
| Light distribution | [WW] 35x28° |
| Delivered lumens flux | 525 lm |
| Rated input power | 5 W |
| Color temperature | 4000 K CRI 70 |
| Luminaire efficacy | 105 lm/W |
| Lamp | 2 LED |
| Color Deviation | 3 SDCM |
| Lifetime L90 (hour) | >42,000 |
| Lifetime L80 (hour) | >42,000 |

Options

Technical information

| | |
|-------------------------|---------------------------------------------------------------------------|
| Mounting | Ground recessed mountable |
| Housing | Corrosion resistant stainless steel housing (AISI 316L / EN 1.4571 grade) |
| Fasteners | Stainless steel (AISI 304 / EN 1.4301 grade) |
| Gasket | Silicone |
| Lens / Reflector | High reflectance aluminium coating, multifaceted micro reflector |
| Glass / Diffusor | Tempered safety glass |
| Impact protection | IK10 |
| Ingress protection | IP67 |
| Input voltage | 120-277V 50/60Hz |
| Insulation class | Class I |
| Weight | 8.9 lbs |
| LED module | High power LEDs on metal-core PCB |
| Driver | Internal LED driver |
| Driver surge protection | 3/3 kV |
| Power factor | > 0.40 |
| Through wiring | Single power cord entry |
| Operating temperature | -40...50°C |
| Power cord | 12" of rubber-sheated power cord |

Accessories (Included)

Mounting accessories



Connector set - 5-pole

141407400

Accessories (To be ordered separately)

Mounting accessories



Case removing vacuum

160404012


Mounting accessories



Plastic case for ZEROX M

007502092

| | | | | | | | | |
|--------------------------------|--|--|------|--|------|--|----------|--|
| Project name | | | | | Type | | Quantity | |
| Date | | | Note | | | | | |
| LR9017.522-US-WW-350-740-__-SS | | | | | | | | |

| Light distribution | Rated input power | Color temperature | Control | Product colors |
|----------------------------------------------|----------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------|--------------------------|--------------------------------------------------------------------------------------------------------------------|
| [WW] Wall-wash - 35x28° | [350] 5 W | [740] 4000 K CRI 70 | [ONOFF] On/Off | [SS] Stainless steel  |
| | | [827] 2700 K CRI 80 [830] 3000 K CRI 80 [840] 4000 K CRI 80 | [0-10V] 0-10V | |
| Accessories (Included) | Accessories (To be ordered separately) | | | |
| Mounting accessories | Mounting accessories | | | |
| [141407400] Connector set - 5-pole | [160404012] Case removing vacuum [007502092] Plastic case for ZEROX M | | | |