
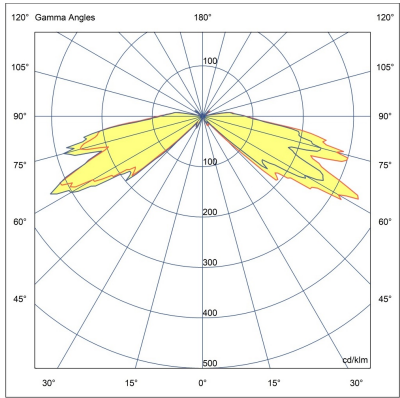


LW7032.693-EN-SYM-3L-700-830-ONOFF

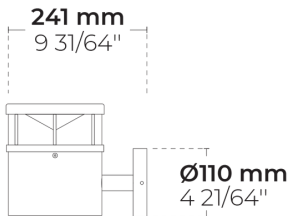

[SYM-3L]

Symmetric, Special  
effect: 3 lines

### Configuration








Light distribution	[SYM-3L] 165°
Delivered lumens flux	451 lm
Rated input power	10 W
Color temperature	3000 K CRI 80
Luminaire efficacy	45 lm/W
Lamp	1 LED
Color Deviation	5 SDCM
BUG rating	B1-U2-G1
ULOR	3.5
Lifetime L90 (hour)	>72,600
Lifetime L80 (hour)	>72,600

### Options

### Technical information

Mounting	Wall mountable
Housing	Corrosion resistant, marine grade aluminum housing
Finishing	Chromate conversion pretreatment followed by electrostatic powder coating
Fasteners	Stainless steel (AISI 304 / EN 1.4301 grade)
Gasket	Silicone
Lens / Reflector	High reflectance aluminium coating
Glass / Diffusor	Custom Design PMMA Diffusor
Impact protection	IK05
Ingress protection	IP65
Input voltage	220-240V 50/60Hz
Insulation class	Class I
Wind catching area (EPA)	N/A
Weight	2.2 kg
LED module	Multi-chip high power LEDs on metal-core PCB
Driver	Internal LED driver
Driver surge protection	1/1 kV
Power factor	> 0.91
Through wiring	Single power cord entry
Operating temperature	-25...50°C
Power cord	8" of flexible power cord

Project name						Type		Quantity	
Date			Note						
LW7032.693-EN-SYM-3L-700-830-ONOFF-__-__-__									

Light distribution	Rated input power	Color temperature	Control	Product colors	
<b>[SYM-3L]</b> Symmetric, Special effect: 3 lines - 165°	<b>[700]</b> 10 W	<b>[830]</b> 3000 K CRI 80	<b>[ONOFF]</b> On/Off	<b>[HM1]</b> Black	
		<b>[827]</b> 2700 K CRI 80		<b>[HM2]</b> Dark gray	
		<b>[740]</b> 4000 K CRI 70		<b>[HM3]</b> Anthracite gray	
		<b>[840]</b> 4000 K CRI 80		<b>[HM4]</b> Light gray	
				<b>[HM5]</b> White	
				<b>[HM6]</b> Bronze	
				<b>[CC]</b> Custom color (Please specify RAL code)	
<b>Extras</b>					
<b>Consult the factory</b>					
<b>[UNI]</b> 120-277V 50/60Hz					
<b>Luminaire body options</b>					
<b>[DPC]</b> Double powder coating					