



# DOMINI AFX MIDI 1 Module



IK08 IP66



LB6047.871-EN-T1-500-830-ONOFF-EN-C1

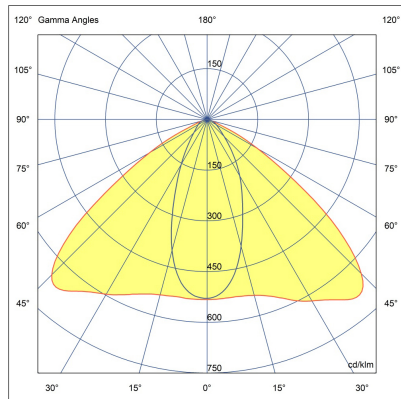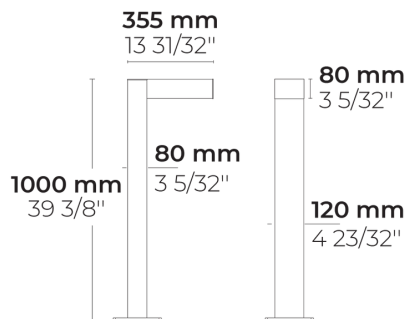**[T1]**Type I, Asymmetric,  
Side throw

## Variant

<b>Light distribution</b>	[T1] 110x45°
<b>Delivered lumens flux</b>	1449 lm
<b>Rated input power</b>	13.5 W
<b>Colour temperature</b>	3000 K CRI 80
<b>Luminaire efficacy</b>	120 lm/W
<b>Lamp</b>	8 LED
<b>MacAdam Ellipse</b>	3 SDCM
<b>BUG rating</b>	B1-U0-G0
<b>Lifetime L90B50 (hour)</b>	>102,000
<b>Lifetime L80B50 (hour)</b>	>102,000

## Options

## Technical information

<b>Mounting</b>	Surface mountable
<b>Housing</b>	Corrosion resistant, extruded, marine grade aluminum housing
<b>Finishing</b>	Chromate conversion pretreatment followed by electrostatic powder coating
<b>Fasteners</b>	Stainless steel (AISI 304 / EN 1.4301 grade)
<b>Gasket</b>	Liquid silicone
<b>Lens / Reflector</b>	PMMA lens with high optical efficiency
<b>Glass / Diffusor</b>	Tempered safety glass
<b>Impact protection</b>	IK08
<b>Ingress protection</b>	IP66
<b>Input voltage</b>	220-240V 50/60Hz
<b>Insulation class</b>	Class I
<b>Weight</b>	5.7 kg
<b>LED module</b>	High power LEDs on metal-core PCB
<b>Driver</b>	Internal LED driver
<b>Driver surge protection</b>	6/6 kV
<b>Power factor</b>	> 0.95
<b>Through wiring</b>	Single cable entry
<b>Operating temperature</b>	-40...50°C
<b>Cable</b>	0.5 m of flexible cable
<b>Notes</b>	3000K CCT or warmer must be selected to be DarkSky International certified.


**HPR Pazarlama A.Ş.**  
Başkent OSB 22. Cd. No: 2, Malıköy, Temelli,  
Sincan, 06909 Ankara, Turkey  
+90 312 267 54 30  
info@hepergroup.com

**HEPER Europe GmbH**  
Ahornweg 5a, 58675  
Hemer, Germany  
+49 237 2901 2975  
infoEU@hepergroup.com

We reserve the right to change specifications without prior written notice. Edition: 19.05.2024.  
For current version visit [heperlighting.com](http://heperlighting.com). All flux (±%7 tolerance) and power values (±%10 tolerance) are derived following appropriate IES, CIE, and applicable standards.

# Accessories (To be ordered separately)


## Anchorage



90AJ001

90AJ001








## Flange covers



C6A2A

C6A2A

<b>Project name</b>		<b>Type</b>		<b>Quantity</b>	
<b>Date</b>		<b>Note</b>			
<b>LB6047.871-EN-T1-500-830-ONOFF-EN-C1-_-_-_-_-_-</b>					

Light distribution	Rated input power	Colour temperature	Control	Product colours
<b>[T1]</b> Type I, Asymmetric, Side throw - 110x45°	<b>[500]</b> 13.5 W	<b>[830]</b> 3000 K CRI 80	<b>[ONOFF]</b> On/Off	<b>[HM1]</b>  Black
<b>[T2]</b> Type II, Asymmetric, Side throw - 134x52°	<b>[350]</b> 10 W	<b>[827]</b> 2700 K CRI 80		<b>[HM2]</b>  Dark grey
<b>[T3]</b> Type III, Asymmetric, Side throw - 131x60°	<b>[700]</b> 18 W	<b>[740]</b> 4000 K CRI 70		<b>[HM3]</b>  Anthracite grey
<b>[T4]</b> Type IV, Asymmetric, Forward throw - 114x65°	<b>[700]</b> 20 W	<b>[840]</b> 4000 K CRI 80		<b>[HM4]</b>  Light grey
<b>[T5]</b> Type V, Symmetric - 115°				<b>[HM5]</b>  White
				<b>[HM6]</b>  Bronze
				<b>[CC]</b>  Custom colour (Please specify RAL code)
Height	Extras	Accessories ( <i>To be ordered separately</i> )		
<b>[H1]</b> 1m	<b>Light output</b>	<b>Anchorage</b>		
<b>[HC]</b>	<b>[BS]</b> Backlight Shield	<b>[90AJ001]</b> 90AJ001		
	<b>Consult the factory</b>	<b>Flange covers</b>		
	<b>[UNI]</b> 120-277V 50/60Hz	<b>[C6A2A]</b> C6A2A		
	<b>Luminaire body options</b>			
	<b>[DPC]</b> Double powder coating			