



# DOMINI AFX MIDI 1 Module



IK08 IP66



LB6047.871-EN-T5-350-830-ONOFF-EN-C1

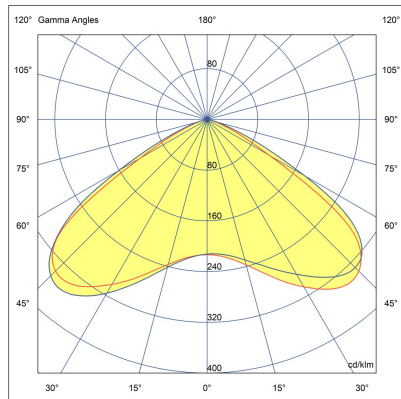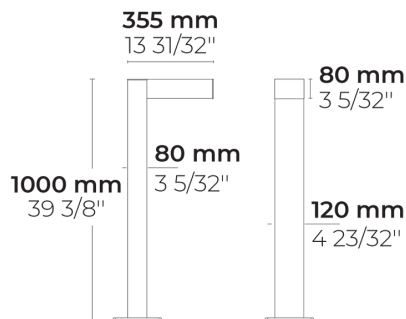

[T5]

Type V, Symmetric

## Variant

|                        |               |
|------------------------|---------------|
| Light distribution     | [T5] 115°     |
| Delivered lumens flux  | 1035 lm       |
| Rated input power      | 10 W          |
| Colour temperature     | 3000 K CRI 80 |
| Luminaire efficacy     | 114 lm/W      |
| Lamp                   | 8 LED         |
| MacAdam Ellipse        | 3 SDCM        |
| BUG rating             | B1-U0-G0      |
| Lifetime L90B50 (hour) | >102,000      |
| Lifetime L80B50 (hour) | >102,000      |

## Options

## Technical information

|                         |   |
|-------------------------|---|
| Mounting                | Surface mountable   |
| Housing                 | Corrosion resistant, extruded, marine grade aluminum housing                |
| Finishing               | Chromate conversion pretreatment followed by electrostatic powder coating   |
| Fasteners               | Stainless steel (AISI 304 / EN 1.4301 grade)                                |
| Gasket                  | Liquid silicone   |
| Lens / Reflector        | PMMA lens with high optical efficiency                                      |
| Glass / Diffusor        | Tempered safety glass   |
| Impact protection       | IK08  |
| Ingress protection      | IP66  |
| Input voltage           | 220-240V 50/60Hz  |
| Insulation class        | Class I   |
| Weight                  | 5.7 kg  |
| LED module              | High power LEDs on metal-core PCB   |
| Driver                  | Internal LED driver   |
| Driver surge protection | 6/6 kV  |
| Power factor            | > 0.95  |
| Through wiring          | Single cable entry  |
| Operating temperature   | -40...50°C  |
| Cable                   | 0.5 m of flexible cable   |
| Notes                   | 3000K CCT or warmer must be selected to be DarkSky International certified. |


HPR Pazarlama A.Ş.  
Başkent OSB 22. Cd. No: 2, Malıköy, Temelli,  
Sincan, 06909 Ankara, Turkey  
+90 312 267 54 30  
info@hepergroup.com

HEPER Europe GmbH  
Ahornweg 5a, 58675  
Hemer, Germany  
+49 237 2901 2975  
infoEU@hepergroup.com

We reserve the right to change specifications without prior written notice. Edition: 19.05.2024.  
For current version visit [heperlighting.com](http://heperlighting.com). All flux (±%7 tolerance) and power values (±%10 tolerance) are derived following appropriate IES, CIE, and applicable standards.

# Accessories (To be ordered separately)


## Anchorage



90AJ001

90AJ001








## Flange covers



C6A2A

C6A2A

|   |  |      |  |          |  |
|---|--|------|--|----------|--|
| Project name  |  | Type |  | Quantity |  |
| Date  |  | Note |  |          |  |
| LB6047.871-EN-T5-350-830-ONOFF-EN-C1-__-__-__-__-__ |  |      |  |          |  |

| Light distribution   | Rated input power  | Colour temperature   | Control                  | Product colours  |
|--|--|--|--------------------------|--|
| <b>[T5]</b><br>Type V, Symmetric - 115°<br><br><b>[T1]</b><br>Type I, Asymmetric, Side throw - 110x45°<br><br><b>[T2]</b><br>Type II, Asymmetric, Side throw - 134x52°<br><br><b>[T3]</b><br>Type III, Asymmetric, Side throw - 131x60°<br><br><b>[T4]</b><br>Type IV, Asymmetric, Forward throw - 114x65° | <b>[350]</b><br>10 W<br><br><b>[500]</b><br>13.5 W<br><br><b>[700]</b><br>18 W<br><br><b>[700]</b><br>20 W | <b>[830]</b><br>3000 K CRI 80<br><br><b>[827]</b><br>2700 K CRI 80<br><br><b>[740]</b><br>4000 K CRI 70<br><br><b>[840]</b><br>4000 K CRI 80 | <b>[ONOFF]</b><br>On/Off | <b>[HM1]</b> <br>Black<br><br><b>[HM2]</b> <br>Dark grey<br><br><b>[HM3]</b> <br>Anthracite grey<br><br><b>[HM4]</b> <br>Light grey<br><br><b>[HM5]</b> <br>White<br><br><b>[HM6]</b> <br>Bronze<br><br><b>[CC]</b> <br>Custom colour (Please specify RAL code) |
| Height   | Extras   | Accessories ( <i>To be ordered separately</i> )  |                          |  |
| <b>[H1]</b><br>1m<br><br><b>[HC]</b>   | <b>Light output</b>  | <b>Anchorage</b>   |                          |  |
|  | <b>[BS]</b><br>Backlight Shield  | <b>[90AJ001]</b><br>90AJ001  |                          |  |
|  | <b>Consult the factory</b>   | <b>Flange covers</b>   |                          |  |
|  | <b>[UNI]</b><br>120-277V 50/60Hz   | <b>[C6A2A]</b><br>C6A2A  |                          |  |
|  | <b>Luminaire body options</b>  |  |                          |  |
|  | <b>[DPC]</b><br>Double powder coating  |  |                          |  |