



DOMINI AFX MIDI 1 Module Duo



IK08 IP66



LB6047.872-EN-T1-500-840-ONOFF-EN-C1

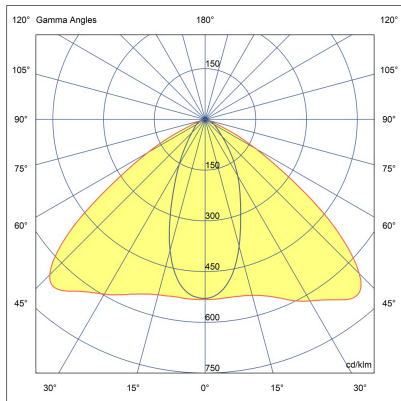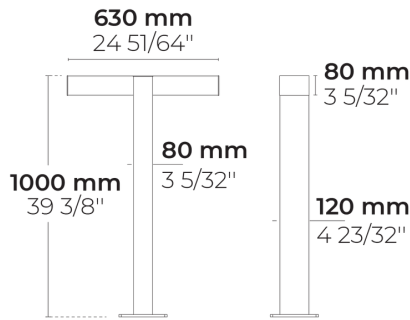

[T1]

Type I, Asymmetric,
Side throw

Variant

| | |
|------------------------|---------------|
| Light distribution | [T1] 110x45° |
| Delivered lumens flux | 2897 lm |
| Rated input power | 27 W |
| Colour temperature | 4000 K CRI 80 |
| Luminaire efficacy | 120 lm/W |
| Lamp | 16 LED |
| MacAdam Ellipse | 3 SDCM |
| BUG rating | B1-U0-G0 |
| Lifetime L90B50 (hour) | >102,000 |
| Lifetime L80B50 (hour) | >102,000 |

Options

Technical information

| | |
|-------------------------|---|
| Mounting | Surface mountable |
| Housing | Corrosion resistant, extruded, marine grade aluminum housing |
| Finishing | Chromate conversion pretreatment followed by electrostatic powder coating |
| Fasteners | Stainless steel (AISI 304 / EN 1.4301 grade) |
| Gasket | Liquid silicone |
| Lens / Reflector | PMMA lens with high optical efficiency |
| Glass / Diffuser | Tempered safety glass |
| Impact protection | IK08 |
| Ingress protection | IP66 |
| Input voltage | 220-240V 50/60Hz |
| Insulation class | Class I |
| Weight | 7.43 kg |
| LED module | High power LEDs on metal-core PCB |
| Driver | Internal LED driver |
| Driver surge protection | 6/6 kV |
| Power factor | > 0.95 |
| Through wiring | Single cable entry |
| Operating temperature | -40...50°C |
| Cable | 0.5 m of flexible cable |
| Notes | 3000K CCT or warmer must be selected to be DarkSky International certified. |


HPR Pazarlama A.Ş.
Başkent OSB 22. Cd. No: 2, Malıköy, Temelli,
Sincan, 06909 Ankara, Turkey
+90 312 267 54 30
info@hepergroup.com

HEPER Europe GmbH
Ahornweg 5a, 58675
Hemer, Germany
+49 237 2901 2975
infoEU@hepergroup.com

We reserve the right to change specifications without prior written notice. Edition: 19.05.2024.
For current version visit heperlighting.com. All flux (±7% tolerance) and power values (±10% tolerance) are derived following appropriate IES, CIE, and applicable standards.


Accessories (To be ordered separately)

Anchorage










90AJ001
90AJ001

Flange covers



C6A2A
C6A2A

| | | | | | |
|--|--|------|--|----------|--|
| Project name | | Type | | Quantity | |
| Date | | Note | | | |
| LB6047.872-EN-T1-500-840-ONOFF-EN-C1-__-__-__-__-__-__ | | | | | |

| Light distribution | Rated input power | Colour temperature | Control | Product colours | |
|--|--|---|--------------------------|---|---|
| [T1] Type I, Asymmetric, Side throw - 110x45° [T2] Type II, Asymmetric, Side throw - 134x52° [T3] Type III, Asymmetric, Side throw - 131x60° [T4] Type IV, Asymmetric, Forward throw - 114x65° [T5] Type V, Symmetric - 115° | [500] 27 W | [840] 4000 K CRI 80 | [ONOFF] On/Off | [HM1] Black |  |
| | [350] 20 W | [827] 2700 K CRI 80 | | [HM2] Dark grey |  |
| | [700] 37 W | [830] 3000 K CRI 80 | | [HM3] Anthracite grey |  |
| | | [740] 4000 K CRI 70 | | [HM4] Light grey |  |
| | | | | [HM5] White |  |
| | | | | [HM6] Bronze |  |
| | | | | [CC] Custom colour (Please specify RAL code) |  |
| Height | Extras | Accessories (<i>To be ordered separately</i>) | | | |
| [H1] 1m [HC] | Light output | Anchorage | | | |
| | [BS] Backlight Shield | [90AJ001] 90AJ001 | | | |
| | Consult the factory | Flange covers | | | |
| | [UNI] 120-277V 50/60Hz | [C6A2A] C6A2A | | | |
| | Luminaire body options | | | | |
| | [DPC] Double powder coating | | | | |