

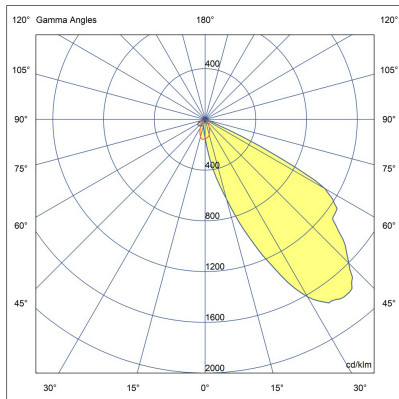

# HANDRA Side - Ø48 mm



IK10 IP65



LH5005.595-US-SLSH-350-740-CC-3V-350-C3

22 mm  
55/64"40 mm  
1 37/64"**[SLSH]**Special linear, Side  
throw

## Variant

Light distribution	[SLSH] 42x54°
Delivered lumens flux	48 lm
Rated input power	1 W
Colour temperature	4000 K CRI 70
Luminaire efficacy	48 lm/W
Lamp	1 LED
MacAdam Ellipse	4 SDCM
Lifetime L90B50 (hour)	>102,000
Lifetime L80B50 (hour)	>102,000

## Options

## Technical information




Housing	Corrosion resistant, die-cast, marine grade aluminum housing
Finishing	Chromate conversion pretreatment followed by electrostatic powder coating
Fasteners	Stainless steel (AISI 304 / EN 1.4301 grade)
Gasket	Liquid gasket
Lens / Reflector	High reflectance aluminium coating
Glass / Diffusor	Custom Design PMMA Diffusor
Impact protection	IK10
Ingress protection	IP65
Input voltage	3 Vdc (Max) 350 mA
Insulation class	Class III
Weight	0.1 lbs
LED module	High power LEDs on metal-core PCB
Driver	External LED driver
Through wiring	Single cable entry
Operating temperature	-25...50°C
Cable	0.2 m of flexible cable
Packing box dimensions	2 3/4" * 2 3/4" * 2 3/4"

HPR Pazarlama A.Ş.  
Başkent OSB 22. Cd. No: 2, Malıköy, Temelli,  
Sincan, 06909 Ankara, Turkey  
+90 312 267 54 30  
info@hepergroup.com

HEPER Europe GmbH  
Ahornweg 5a, 58675  
Hemer, Germany  
+49 237 2901 2975  
infoEU@hepergroup.com

We reserve the right to change specifications without prior written notice. Edition: 06.05.2024.  
For current version visit [heperlighting.com](http://heperlighting.com). All flux (±7% tolerance) and power values (±10% tolerance) are derived following appropriate IES, CIE, and applicable standards.

Accessories (To be ordered separately)

Mounting accessories	Mounting accessories	Mounting accessories
		
0-10V Driver within an IP67 box for 1 to 6 HANDRA modules	0-10V Driver within an IP67 box for 7 to 15 HANDRA modules	0-10V Driver within an IP67 box for 16 to 35 HANDRA modules
007502066	007502067	007502068

Project name		Type		Quantity	
Date		Note			
LH5005.595-US-SLSH-350-740-__-CC-3V-350-C3-__					

Light distribution	Rated input power	Colour temperature	Control	Product colours
<b>[SLSH]</b> Special linear, Side throw - 42x54°	<b>[350]</b> 1 W	<b>[740]</b> 4000 K CRI 70		<b>[HM1]</b> Black
		<b>[827]</b> 2700 K CRI 80		<b>[HM2]</b> Dark grey
		<b>[830]</b> 3000 K CRI 80		<b>[HM3]</b> Anthracite grey
		<b>[840]</b> 4000 K CRI 80		<b>[HM4]</b> Light grey
				<b>[HM5]</b> White
				<b>[HM6]</b> Bronze
				<b>[CC]</b> Custom colour (Please specify RAL code)
<b>Accessories (<i>To be ordered separately</i>)</b>				
<b>Mounting accessories</b>				
<b>[007502066]</b> 0-10V Driver within an IP67 box for 1 to 6 HANDRA modules				
<b>[007502067]</b> 0-10V Driver within an IP67 box for 7 to 15 HANDRA modules				
<b>[007502068]</b> 0-10V Driver within an IP67 box for 16 to 35 HANDRA modules				