

HANDRA Side - Ø2"



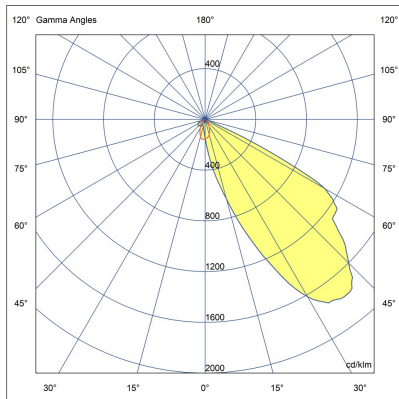

LH5005.595-US-SLSH-350-740



22 mm
55/64"



40 mm
1 37/64"



[SLSH]

Special linear, Side
throw

Configuration




Light distribution	[SLSH] 42x54°
Delivered lumens flux	48 lm
Rated input power	1 W
Color temperature	4000 K CRI 70
Luminaire efficacy	48 lm/W
Lamp	1 LED
Color Deviation	4 SDCM
Lifetime L90 (hour)	>102,000
Lifetime L80 (hour)	>102,000

Options

Technical information

Housing	Corrosion resistant, die-cast, marine grade aluminum housing
Finishing	Chromate conversion pretreatment followed by electrostatic powder coating
Fasteners	Stainless steel (AISI 304 / EN 1.4301 grade)
Gasket	Liquid gasket
Lens / Reflector	High reflectance aluminium coating
Glass / Diffusor	Custom Design PMMA Diffusor
Impact protection	IK10
Ingress protection	IP65
Input voltage	3 Vdc (Max) 350 mA
Insulation class	Class III
Weight	0.1 lbs
LED module	High power LEDs on metal-core PCB
Driver	External LED driver
Through wiring	Single power cord entry
Operating temperature	-25...50°C
Power cord	8" of flexible power cord
Packing box dimensions	2 3/4" x 2 3/4" x 2 3/4"

Accessories (To be ordered separately)

Mounting accessories	Mounting accessories	Mounting accessories
		
0-10V Driver within an IP67 box for 1 to 6 HANDRA modules	0-10V Driver within an IP67 box for 7 to 15 HANDRA modules	0-10V Driver within an IP67 box for 16 to 35 HANDRA modules
007502066	007502067	007502068

Project name				Type		Quantity	
Date		Note					
LH5005.595-US-SLSH-350-740-__-__							

Light distribution	Rated input power	Color temperature	Control	Product colors	
[SLSH] Special linear, Side throw - 42x54°	[350] 1 W	[740] 4000 K CRI 70		[HM1] Black	
		[827] 2700 K CRI 80		[HM2] Dark gray	
		[830] 3000 K CRI 80		[HM3] Anthracite gray	
		[840] 4000 K CRI 80		[HM4] Light gray	
		[HM5] White			
		[HM6] Bronze			
		[CC] Custom color (Please specify RAL code)			
		Accessories (<i>To be ordered separately</i>)			
Mounting accessories					
[007502066] 0-10V Driver within an IP67 box for 1 to 6 HANDRA modules					
[007502067] 0-10V Driver within an IP67 box for 7 to 15 HANDRA modules					
[007502068] 0-10V Driver within an IP67 box for 16 to 35 HANDRA modules					