



# DOMINO AFX 1 Module Duo

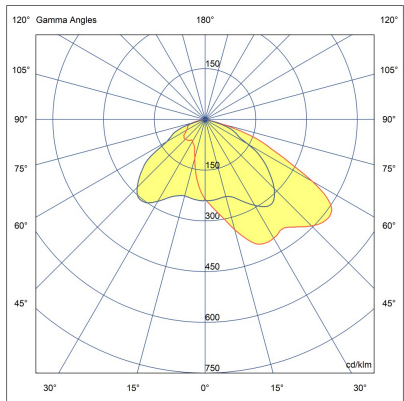

LP4091.861-US-T4-500-740

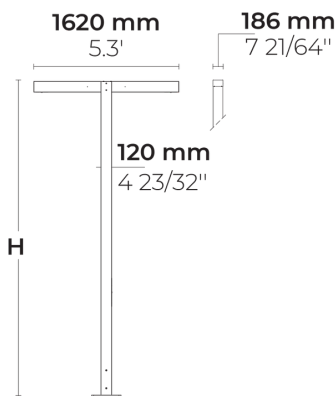

[T4]  
Type IV

## Configuration

|                       |               |
|-----------------------|---------------|
| Light distribution    | [T4] 117x64°  |
| Delivered lumens flux | 6565 lm       |
| Rated input power     | 50 W          |
| Color temperature     | 4000 K CRI 70 |
| Luminaire efficacy    | 136 lm/W      |
| Lamp                  | 32 LED        |
| Color Deviation       | 4 SDCM        |
| BUG rating            | B1-U0-G1      |
| Lifetime L90 (hour)   | >102,000      |
| Lifetime L80 (hour)   | >102,000      |

## Options

## Technical information

|                         |                                                                                                                       |
|-------------------------|-----------------------------------------------------------------------------------------------------------------------|
| Mounting                | Surface mountable                                                                                                     |
| Housing                 | Corrosion resistant, marine grade aluminum housing                                                                    |
| Finishing               | Chromate conversion pretreatment followed by electrostatic powder coating                                             |
| Fasteners               | Stainless steel (AISI 304 / EN 1.4301 grade)                                                                          |
| Gasket                  | Liquid silicone                                                                                                       |
| Lens / Reflector        | PMMA lens with high optical efficiency                                                                                |
| Glass / Diffusor        | Tempered safety glass                                                                                                 |
| Impact protection       | IK08                                                                                                                  |
| Ingress protection      | IP66                                                                                                                  |
| Input voltage           | 120-277V 50/60Hz                                                                                                      |
| Insulation class        | Class I                                                                                                               |
| Weight                  | 110.77 lbs (13'), 243.69 lbs (16.5'), 254.91 lbs (20')                                                                |
| LED module              | High power LEDs on metal-core PCB                                                                                     |
| Driver                  | Internal LED driver                                                                                                   |
| Driver surge protection | 10/6 kV                                                                                                               |
| Power factor            | > 0.95                                                                                                                |
| Through wiring          | Single power cord entry                                                                                               |
| Operating temperature   | -40...50°C                                                                                                            |
| Power cord              | 20" of outdoor use rated flexible power cord                                                                          |
| Pole detail             | Poles are supplied with flange plate. Flange cover and anchorage can be ordered separately. Embedded base is optional |
| Notes                   | 3000K CCT or warmer must be selected to be DarkSky International certified.                                           |

# Poles (Included)

---

## Product specific poles with base plate



| Configuration code | Height | Diameter /<br>Dimensions | Spigot / End<br>diameter |
|--------------------|--------|--------------------------|--------------------------|
| PAFD.R01.T003-H4   | 13.1'  | 7.1x4.7"                 |                          |
| PAFD.R01.T003-H5   | 16.4'  | 7.1x4.7"                 |                          |
| PAFD.R01.T003-H6   | 19.7'  | 7.1x4.7"                 |                          |

