



URBAN BOLLARD

CE UK CA IK08 IP65

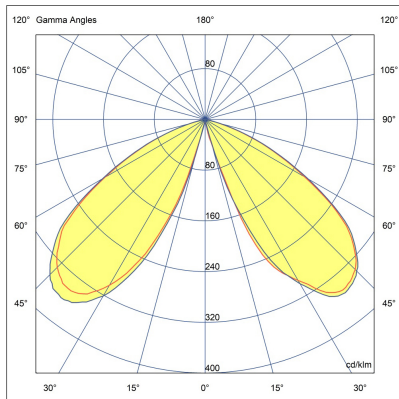

LB6060.547-EN-SYM-350-830-ONOFF-EN-C1

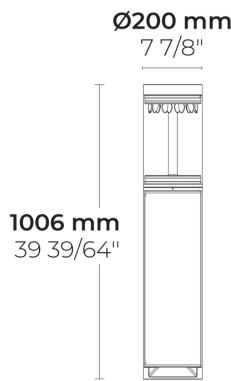

[SYM]

Symmetric

Variant

Light distribution	[SYM] 114°
Delivered lumens flux	2124 lm
Rated input power	30 W
Colour temperature	3000 K CRI 80
Luminaire efficacy	70 lm/W
Lamp	12 LED
MacAdam Ellipse	3 SDCM
BUG rating	B2-U0-G1
Lifetime L90B50 (hour)	>60,000
Lifetime L80B50 (hour)	>60,000

Options

Technical information

Mounting	Surface mountable
Housing	Corrosion resistant, extruded, marine grade aluminum housing
Finishing	Chromate conversion pretreatment followed by electrostatic powder coating
Fasteners	Stainless steel (AISI 304 / EN 1.4301 grade)
Gasket	Silicone
Lens / Reflector	High reflectance aluminium coating, multifaceted micro reflector
Glass / Diffusor	UV stable, bio-based polycarbonate diffusor
Impact protection	IK08
Ingress protection	IP65
Input voltage	220-240V 50/60Hz
Insulation class	Class I
Weight	11.8 kg
LED module	Multi-chip high power LEDs on metal-core PCB
Driver	Internal LED driver
Driver surge protection	2/2 kV
Power factor	> 0.90
Through wiring	Single cable entry
Operating temperature	-40...50°C
Cable	0.5 m of flexible cable


HPR Pazarlama A.Ş.
Başkent OSB 22. Cd. No: 2, Malıköy, Temelli,
Sincan, 06909 Ankara, Turkey
+90 312 267 54 30
info@hepergroup.com

HEPER Europe GmbH
Ahornweg 5a, 58675
Hemer, Germany
+49 237 2901 2975
infoEU@hepergroup.com

We reserve the right to change specifications without prior written notice. Edition: 28.04.2024.
For current version visit heperlighting.com. All flux (±7% tolerance) and power values (±10% tolerance) are derived following appropriate IES, CIE, and applicable standards.

Accessories (To be ordered separately)

Anchorage



630J014

630J014

Project name		Type		Quantity	
Date		Note			
LB6060.547-EN-SYM-350-830-ONOFF-EN-C1-_-_-_-_-					

Light distribution	Rated input power	Colour temperature	Control	Product colours
[SYM] Symmetric - 114°	[350] 30 W	[830] 3000 K CRI 80	[ONOFF] On/Off	[HM1] Black
		[827] 2700 K CRI 80		[HM2] Dark grey
		[740] 4000 K CRI 70		[HM3] Anthracite grey
		[840] 4000 K CRI 80		[HM4] Light grey
				[HM5] White
				[HM6] Bronze
				[CC] Custom colour (Please specify RAL code)
Height	Extras	Accessories (<i>To be ordered separately</i>)		
[H1] 1m	Consult the factory	Anchorage		
[HC]	[UNI] 120-277V 50/60Hz	[630J014] 630J014		
	Luminaire body options			
	[DPC] Double powder coating			