



URBAN BOLLARD

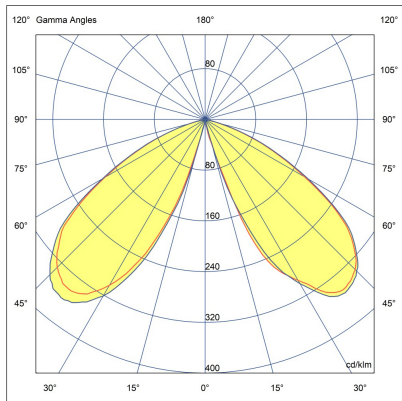

LB6060.547-EN-SYM-350-830-ONOFF

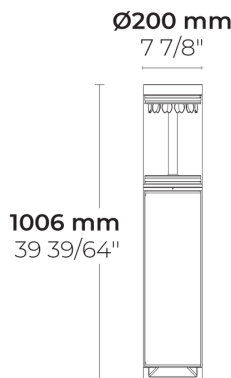

[SYM]
Symmetric

Configuration

Light distribution	[SYM] 114°
Delivered lumens flux	2124 lm
Rated input power	30 W
Color temperature	3000 K CRI 80
Luminaire efficacy	70 lm/W
Lamp	12 LED
Color Deviation	3 SDCM
BUG rating	B2-U0-G1
Lifetime L90 (hour)	>60,000
Lifetime L80 (hour)	>60,000


Options

Technical information

Mounting	Surface mountable
Housing	Corrosion resistant, extruded, marine grade aluminum housing
Finishing	Chromate conversion pretreatment followed by electrostatic powder coating
Fasteners	Stainless steel (AISI 304 / EN 1.4301 grade)
Gasket	Silicone
Lens / Reflector	High reflectance aluminium coating, multifaceted micro reflector
Glass / Diffuser	UV stable, bio-based polycarbonate diffuser
Impact protection	IK08
Ingress protection	IP65
Input voltage	220-240V 50/60Hz
Insulation class	Class I
Weight	11.8 kg
LED module	Multi-chip high power LEDs on metal-core PCB
Driver	Internal LED driver
Driver surge protection	2/2 kV
Power factor	> 0.90
Through wiring	Single power cord entry
Operating temperature	-40...50°C
Power cord	20" of outdoor use rated flexible power cord

Accessories (To be ordered separately)

Anchor bolts



630J014

630J014

Project name				Type		Quantity	
Date		Note					

LB6060.547-EN-SYM-350-830-ONOFF-__-__-__-__

Light distribution	Rated input power	Color temperature	Control	Product colors
[SYM] Symmetric - 114°	[350] 30 W	[830] 3000 K CRI 80	[ONOFF] On/Off	<div> <div>[HM1]</div> <div>Black</div> <div></div> </div> <div> <div>[HM2]</div> <div>Dark gray</div> <div></div> </div> <div> <div>[HM3]</div> <div>Anthracite gray</div> <div></div> </div> <div> <div>[HM4]</div> <div>Light gray</div> <div></div> </div> <div> <div>[HM5]</div> <div>White</div> <div></div> </div> <div> <div>[HM6]</div> <div>Bronze</div> <div></div> </div> <div> <div>[CC]</div> <div>Custom color (Please specify RAL code)</div> <div></div> </div>
Height	Extras	Accessories (<i>To be ordered separately</i>)		
[H1] 3.3' [HC]	Consult the factory	Anchor bolts		
	[UNI] 120-277V 50/60Hz	[630J014] 630J014		
	Luminaire body options			
	[DPC] Double powder coating			