



# URBAN BOLLARD

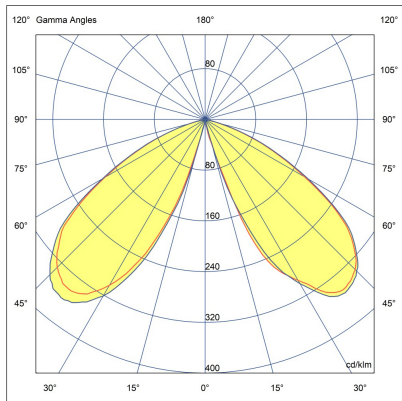

LB6060.547-EN-SYM-350-830-ONOFF

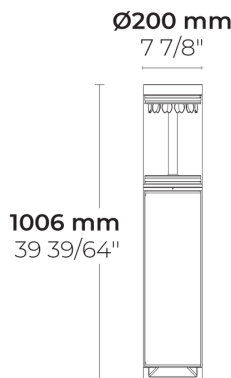

[SYM]  
Symmetric

## Configuration

|                       |               |
|-----------------------|---------------|
| Light distribution    | [SYM] 114°    |
| Delivered lumens flux | 2124 lm       |
| Rated input power     | 30 W          |
| Color temperature     | 3000 K CRI 80 |
| Luminaire efficacy    | 70 lm/W       |
| Lamp                  | 12 LED        |
| Color Deviation       | 3 SDCM        |
| BUG rating            | B2-U0-G1      |
| Lifetime L90 (hour)   | >60,000       |
| Lifetime L80 (hour)   | >60,000       |


## Options

## Technical information

|                         |   |
|-------------------------|---|
| Mounting                | Surface mountable   |
| Housing                 | Corrosion resistant, extruded, marine grade aluminum housing              |
| Finishing               | Chromate conversion pretreatment followed by electrostatic powder coating |
| Fasteners               | Stainless steel (AISI 304 / EN 1.4301 grade)                              |
| Gasket                  | Silicone  |
| Lens / Reflector        | High reflectance aluminium coating, multifaceted micro reflector          |
| Glass / Diffuser        | UV stable, bio-based polycarbonate diffuser                               |
| Impact protection       | IK08  |
| Ingress protection      | IP65  |
| Input voltage           | 220-240V 50/60Hz  |
| Insulation class        | Class I   |
| Weight                  | 11.8 kg   |
| LED module              | Multi-chip high power LEDs on metal-core PCB                              |
| Driver                  | Internal LED driver   |
| Driver surge protection | 2/2 kV  |
| Power factor            | > 0.90  |
| Through wiring          | Single power cord entry   |
| Operating temperature   | -40...50°C  |
| Power cord              | 20" of outdoor use rated flexible power cord                              |

# Accessories (To be ordered separately)

## Anchor bolts



630J014

630J014

|              |  |      |  |      |  |          |  |
|--------------|--|------|--|------|--|----------|--|
| Project name |  |      |  | Type |  | Quantity |  |
| Date         |  | Note |  |      |  |          |  |

**LB6060.547-EN-SYM-350-830-ONOFF-\_\_-\_\_-\_\_-\_\_**

| Light distribution                     | Rated input power                     | Color temperature                               | Control                  | Product colors  |
|--|---------------------------------------|---|--------------------------|---|
| <b>[SYM]</b><br>Symmetric - 114°       | <b>[350]</b><br>30 W                  | <b>[830]</b><br>3000 K CRI 80                   | <b>[ONOFF]</b><br>On/Off | <div> <div><b>[HM1]</b></div> <div>Black</div> <div></div> </div> <div> <div><b>[HM2]</b></div> <div>Dark gray</div> <div></div> </div> <div> <div><b>[HM3]</b></div> <div>Anthracite gray</div> <div></div> </div> <div> <div><b>[HM4]</b></div> <div>Light gray</div> <div></div> </div> <div> <div><b>[HM5]</b></div> <div>White</div> <div></div> </div> <div> <div><b>[HM6]</b></div> <div>Bronze</div> <div></div> </div> <div> <div><b>[CC]</b></div> <div>Custom color (Please specify RAL code)</div> <div></div> </div> |
| Height                                 | Extras                                | Accessories ( <i>To be ordered separately</i> ) |                          |   |
| <b>[H1]</b><br>3.3'<br><br><b>[HC]</b> | <b>Consult the factory</b>            | <b>Anchor bolts</b>                             |                          |   |
|  | <b>[UNI]</b><br>120-277V 50/60Hz      | <b>[630J014]</b><br>630J014                     |                          |   |
|  | <b>Luminaire body options</b>         |   |                          |   |
|  | <b>[DPC]</b><br>Double powder coating |   |                          |   |