



# URBAN BOLLARD Ch

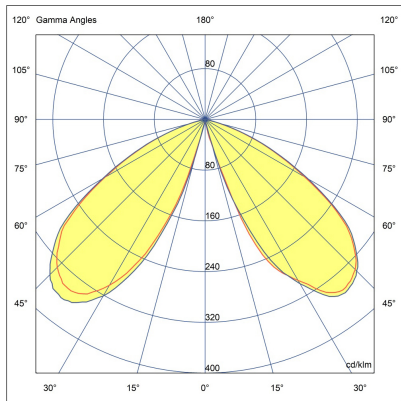

LB6061.547-EN-SYM-350-830-ONOFF

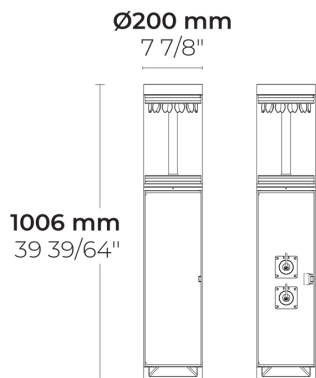

[SYM]  
Symmetric

## Configuration

|                       |               |
|-----------------------|---------------|
| Light distribution    | [SYM] 114°    |
| Delivered lumens flux | 2124 lm       |
| Rated input power     | 30 W          |
| Color temperature     | 3000 K CRI 80 |
| Luminaire efficacy    | 70 lm/W       |
| Lamp                  | 12 LED        |
| Color Deviation       | 3 SDCM        |
| BUG rating            | B2-U0-G1      |
| Lifetime L90 (hour)   | >60,000       |
| Lifetime L80 (hour)   | >60,000       |


## Options

## Technical information

|                         |                                                                                                                                           |
|-------------------------|-------------------------------------------------------------------------------------------------------------------------------------------|
| Mounting                | Surface mountable                                                                                                                         |
| Housing                 | Corrosion resistant, extruded, marine grade aluminum housing                                                                              |
| Finishing               | Chromate conversion pretreatment followed by electrostatic powder coating                                                                 |
| Fasteners               | Stainless steel (AISI 304 / EN 1.4301 grade)                                                                                              |
| Gasket                  | Silicone                                                                                                                                  |
| Lens / Reflector        | High reflectance aluminium coating, multifaceted micro reflector                                                                          |
| Glass / Diffuser        | UV stable, bio-based polycarbonate diffuser                                                                                               |
| Impact protection       | IK08                                                                                                                                      |
| Ingress protection      | IP65                                                                                                                                      |
| Input voltage           | 220-240V 50/60Hz                                                                                                                          |
| Insulation class        | Class I                                                                                                                                   |
| Weight                  | 11.8 kg                                                                                                                                   |
| LED module              | Multi-chip high power LEDs on metal-core PCB                                                                                              |
| Driver                  | Internal LED driver                                                                                                                       |
| Driver surge protection | 2/2 kV                                                                                                                                    |
| Power factor            | > 0.90                                                                                                                                    |
| Through wiring          | Single power cord entry                                                                                                                   |
| Operating temperature   | -40...50°C                                                                                                                                |
| Power cord              | 20" of outdoor use rated flexible power cord                                                                                              |
| Notes                   | As standard, 2 sockets of mono-phase are provided. Upon request, a maximum of 3 sockets with different socket types can be also provided. |

Accessories (To be ordered separately)

Anchor bolts



630J014  
630J014

|              |  |      |  |      |  |          |  |
|--------------|--|------|--|------|--|----------|--|
| Project name |  |      |  | Type |  | Quantity |  |
| Date         |  | Note |  |      |  |          |  |

**LB6061.547-EN-SYM-350-830-ONOFF-\_\_-\_\_-\_\_-\_\_**

| Light distribution                     | Rated input power                     | Color temperature                               | Control                  | Product colors                                                                                                                                                                                                                                                                                                                                                                                        |
|----------------------------------------|---------------------------------------|-------------------------------------------------|--------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>[SYM]</b><br>Symmetric - 114°       | <b>[350]</b><br>30 W                  | <b>[830]</b><br>3000 K CRI 80                   | <b>[ONOFF]</b><br>On/Off | <div> <b>[HM1]</b><br/> Black <div></div> </div> <div> <b>[HM2]</b><br/> Dark gray <div></div> </div> <div> <b>[HM3]</b><br/> Anthracite gray <div></div> </div> <div> <b>[HM4]</b><br/> Light gray <div></div> </div> <div> <b>[HM5]</b><br/> White <div></div> </div> <div> <b>[HM6]</b><br/> Bronze <div></div> </div> <div> <b>[CC]</b> <div></div> Custom color (Please specify RAL code) </div> |
| Height                                 | Extras                                | Accessories ( <i>To be ordered separately</i> ) |                          |                                                                                                                                                                                                                                                                                                                                                                                                       |
| <b>[H1]</b><br>3.3'<br><br><b>[HC]</b> | <b>Consult the factory</b>            | <b>Anchor bolts</b>                             |                          |                                                                                                                                                                                                                                                                                                                                                                                                       |
|                                        | <b>[UNI]</b><br>120-277V 50/60Hz      | <b>[630J014]</b><br>630J014                     |                          |                                                                                                                                                                                                                                                                                                                                                                                                       |
|                                        | <b>Luminaire body options</b>         |                                                 |                          |                                                                                                                                                                                                                                                                                                                                                                                                       |
|                                        | <b>[DPC]</b><br>Double powder coating |                                                 |                          |                                                                                                                                                                                                                                                                                                                                                                                                       |