



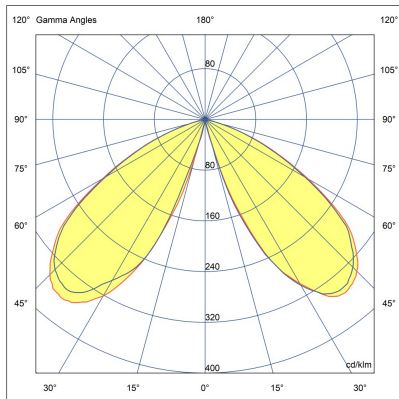

LB6061.547-US-SYM-350-740-ONOFF-UNI-C1

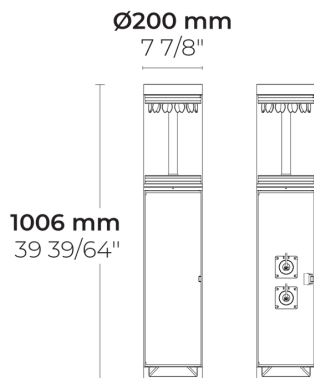

[SYM]  
Symmetric

## Variant

Light distribution	[SYM] 114°
Delivered lumens flux	2457 lm
Rated input power	30 W
Colour temperature	4000 K CRI 70
Luminaire efficacy	81 lm/W
Lamp	12 LED
MacAdam Ellipse	3 SDCM
BUG rating	B2-U0-G1
Lifetime L90B50 (hour)	>60,000
Lifetime L80B50 (hour)	>60,000

## Options


## Technical information

Mounting	Surface mountable
Housing	Corrosion resistant, extruded, marine grade aluminum housing
Finishing	Chromate conversion pretreatment followed by electrostatic powder coating
Fasteners	Stainless steel (AISI 304 / EN 1.4301 grade)
Gasket	Silicone
Lens / Reflector	High reflectance aluminium coating, multifaceted micro reflector
Glass / Diffusor	UV stable, bio-based polycarbonate diffusor
Impact protection	IK08
Ingress protection	IP65
Input voltage	120-277V 50/60Hz
Insulation class	Class I
Weight	26 lbs
LED module	Multi-chip high power LEDs on metal-core PCB
Driver	Internal LED driver
Driver surge protection	2/2 kV
Power factor	> 0.90
Through wiring	Single cable entry
Operating temperature	-40...50°C
Cable	0.5 m of flexible cable
Notes	As standard, 2 sockets of mono-phase are provided. Upon request, a maximum of 3 sockets with different socket types can be also provided.

## Accessories (To be ordered separately)

---

### Anchorage



**630J014**

630J014

Project name		Type		Quantity	
Date		Note			
LB6061.547-US-SYM-350-740-ONOFF-UNI-C1-__-__-__					

Light distribution	Rated input power	Colour temperature	Control	Product colours
[SYM] Symmetric - 114°	[350] 30 W	[740] 4000 K CRI 70	[ONOFF] On/Off	[HM1] Black
		[827] 2700 K CRI 80		[HM2] Dark grey
		[830] 3000 K CRI 80		[HM3] Anthracite grey
		[840] 4000 K CRI 80		[HM4] Light grey
				[HM5] White
				[HM6] Bronze
				[CC] Custom colour (Please specify RAL code)
Height	Extras	Accessories ( <i>To be ordered separately</i> )		
[H1] 1m	Luminaire body options	Anchorage		
[HC]	[DPC] Double powder coating	[630J014] 630J014		