
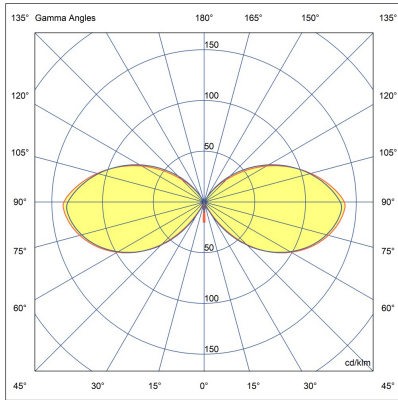


LB6062.693-EN-SYM-4L-700-830-ONOFF-EN-C1-HC

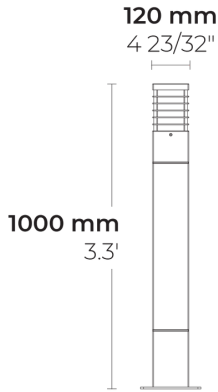

[SYM-4L]

Symmetric, Special effect: 4 lines

Variant

Light distribution	[SYM-4L] 240°
Delivered lumens flux	124 lm
Rated input power	10 W
Colour temperature	3000 K CRI 80
Luminaire efficacy	12 lm/W
Lamp	1 LED
MacAdam Ellipse	3 SDCM
BUG rating	B0-U2-G1
ULOR	27.9
Lifetime L90B50 (hour)	>60,000
Lifetime L80B50 (hour)	>60,000


Options

Technical information

Mounting	Surface mountable
Housing	Corrosion resistant, marine grade aluminium head combined with special wood body
Finishing	Chromate conversion pretreatment followed by electrostatic powder coating
Fasteners	Stainless steel (AISI 304 / EN 1.4301 grade)
Gasket	Liquid silicone
Glass / Diffusor	UV stable, bio-based polycarbonate diffusor
Impact protection	IK08
Ingress protection	IP65
Input voltage	220-240V 50/60Hz
Insulation class	Class I
Weight	5.69 kg
LED module	High power LEDs on metal-core PCB
Driver	Internal LED driver
Driver surge protection	1/1 kV
Power factor	> 0.91
Through wiring	Single cable entry
Operating temperature	-25...50°C
Cable	0.5 m of flexible cable

Accessories (To be ordered separately)








Anchorage



90AJ001

90AJ001

Project name		Type		Quantity	
Date		Note			
LB6062.693-EN-SYM-4L-700-830-ONOFF-EN-C1-__-HC-__-__					

Light distribution	Rated input power	Colour temperature	Control	Product colours	
[SYM-4L] Symmetric, Special effect: 4 lines - 240°	[700] 10 W	[830] 3000 K CRI 80	[ONOFF] On/Off	[HM1] Black	
		[827] 2700 K CRI 80		[HM2] Dark grey	
		[740] 4000 K CRI 70		[HM3] Anthracite grey	
		[840] 4000 K CRI 80		[HM4] Light grey	
		[HM5] White			
		[HM6] Bronze			
		[CC] Custom colour (Please specify RAL code)			
Height	Extras	Accessories <i>(To be ordered separately)</i>			
[HC]	Consult the factory	Anchorages			
	[UNI] 120-277V 50/60Hz	[90AJ001] 90AJ001			
	Luminaire body options				
	[DPC] Double powder coating				