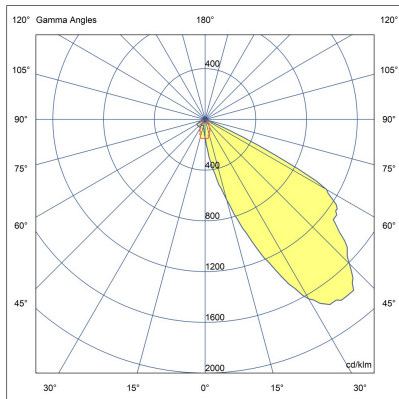
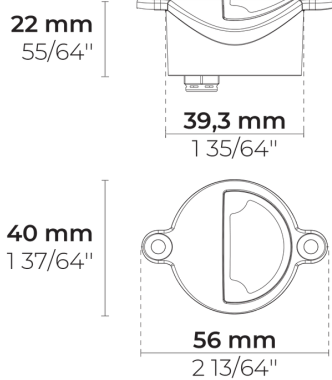


HANDRA Side - Ø48 mm

CE UK CA IK10 IP65



LH5005.595-EN-SLSH-350-830-CC-3V-350-C3



[SLSH]

Special linear, Side throw

Variant




Light distribution	[SLSH] 42x54°
Delivered lumens flux	40 lm
Rated input power	1 W
Colour temperature	3000 K CRI 80
Luminaire efficacy	40 lm/W
Lamp	1 LED
MacAdam Ellipse	3 SDCM
Lifetime L90B50 (hour)	>102,000
Lifetime L80B50 (hour)	>102,000

Options

Technical information

Housing	Corrosion resistant, die-cast, marine grade aluminum housing
Finishing	Chromate conversion pretreatment followed by electrostatic powder coating
Fasteners	Stainless steel (AISI 304 / EN 1.4301 grade)
Gasket	Liquid gasket
Lens / Reflector	High reflectance aluminium coating
Glass / Diffuser	Custom Design PMMA Diffuser
Impact protection	IK10
Ingress protection	IP65
Input voltage	3 Vdc (Max) 350 mA
Insulation class	Class III
Weight	0.05 kg
LED module	High power LEDs on metal-core PCB
Driver	External LED driver
Through wiring	Single cable entry
Operating temperature	-25...50°C
Cable	0.2 m of flexible cable
Packing box dimensions	7*7*7 cm
Notes	QUICK SHIP: Some variants will be delivered faster. Please consult the factory.

Accessories (To be ordered separately)

Mounting accessories	Mounting accessories	Mounting accessories
		
DALI & On/Off driver within an IP67 box for 1 to 6 HANDRA modules	DALI & On/Off driver within an IP67 box for 7 to 15 HANDRA modules	DALI & On/Off driver within an IP67 box for 16 to 35 HANDRA modules
007502063	007502064	007502065

Project name		Type		Quantity	
Date		Note			
LH5005.595-EN-SLSH-350-830-__-CC-3V-350-C3-__					

Light distribution	Rated input power	Colour temperature	Control	Product colours
[SLSH] Special linear, Side throw - 42x54° 	[350] 1 W	[830] 3000 K CRI 80 [827] 2700 K CRI 80 [740] 4000 K CRI 70 [840] 4000 K CRI 80	[ONOFF] On/Off [DALI] DALI	[HM1]  Black [HM2]  Dark grey [HM3]  Anthracite grey [HM4]  Light grey [HM5]  White [HM6]  Bronze [CC]  Custom colour (Please specify RAL code)

Accessories (To be ordered separately)

Mounting accessories

[007502063]
DALI & On/Off driver within an IP67 box for 1 to 6 HANDRA modules

[007502064]
DALI & On/Off driver within an IP67 box for 7 to 15 HANDRA modules

[007502065]
DALI & On/Off driver within an IP67 box for 16 to 35 HANDRA modules