



# HANDRA Side - Ø2"

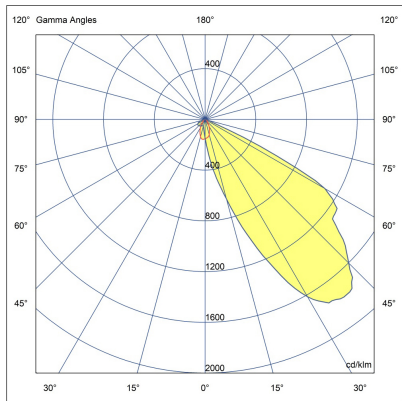

LH5005.595-US-SLSH-350-840

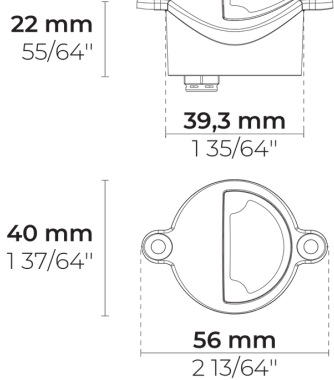

[SLSH]

Special linear, Side  
throw

## Configuration

Light distribution	[SLSH] 42x54°
Delivered lumens flux	40 lm
Rated input power	1 W
Color temperature	4000 K CRI 80
Luminaire efficacy	40 lm/W
Lamp	1 LED
Color Deviation	4 SDCM
Lifetime L90 (hour)	>102,000
Lifetime L80 (hour)	>102,000




## Options

## Technical information








Housing	Corrosion resistant, die-cast, marine grade aluminum housing
Finishing	Chromate conversion pretreatment followed by electrostatic powder coating
Fasteners	Stainless steel (AISI 304 / EN 1.4301 grade)
Gasket	Liquid gasket
Lens / Reflector	High reflectance aluminium coating
Glass / Diffusor	Custom Design PMMA Diffusor
Impact protection	IK10
Ingress protection	IP65
Input voltage	3 Vdc (Max) 350 mA
Insulation class	Class III
Weight	0.1 lbs
LED module	High power LEDs on metal-core PCB
Driver	External LED driver
Through wiring	Single power cord entry
Operating temperature	-25...50°C
Power cord	8" of flexible power cord
Packing box dimensions	2 3/4" * 2 3/4" * 2 3/4"

## Accessories (To be ordered separately)

---

Mounting accessories	Mounting accessories	Mounting accessories
		
<b>0-10V Driver within an IP67 box for 1 to 6 HANDRA modules</b>	<b>0-10V Driver within an IP67 box for 7 to 15 HANDRA modules</b>	<b>0-10V Driver within an IP67 box for 16 to 35 HANDRA modules</b>
007502066	007502067	007502068

Project name				Type		Quantity	
Date		Note					
LH5005.595-US-SLSH-350-840-__-__							

Light distribution	Rated input power	Color temperature	Control	Product colors
<b>[SLSH]</b> Special linear, Side throw - 42x54°	<b>[350]</b> 1 W	<b>[840]</b> 4000 K CRI 80		<b>[HM1]</b>  Black
		<b>[827]</b> 2700 K CRI 80		<b>[HM2]</b>  Dark gray
		<b>[830]</b> 3000 K CRI 80		<b>[HM3]</b>  Anthracite gray
		<b>[740]</b> 4000 K CRI 70		<b>[HM4]</b>  Light gray
				<b>[HM5]</b>  White
				<b>[HM6]</b>  Bronze
				<b>[CC]</b>  Custom color (Please specify RAL code)
<b>Accessories (<i>To be ordered separately</i>)</b>				
<b>Mounting accessories</b>				
<b>[007502066]</b> 0-10V Driver within an IP67 box for 1 to 6 HANDRA modules				
<b>[007502067]</b> 0-10V Driver within an IP67 box for 7 to 15 HANDRA modules				
<b>[007502068]</b> 0-10V Driver within an IP67 box for 16 to 35 HANDRA modules				