
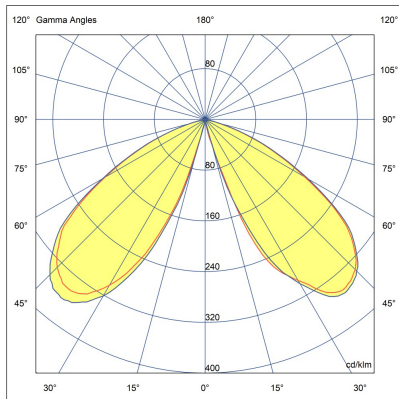


LB6061.547-EN-SYM-350-840-ONOFF-EN-C1

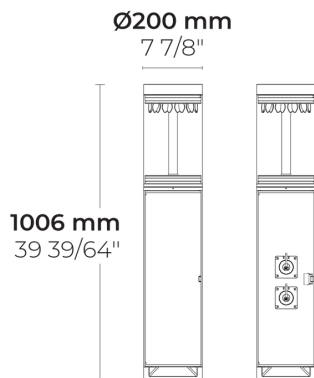

[SYM]  
Symmetric

## Variant

|                        |               |
|------------------------|---------------|
| Light distribution     | [SYM] 114°    |
| Delivered lumens flux  | 2236 lm       |
| Rated input power      | 30 W          |
| Colour temperature     | 4000 K CRI 80 |
| Luminaire efficacy     | 74 lm/W       |
| Lamp                   | 12 LED        |
| MacAdam Ellipse        | 3 SDCM        |
| BUG rating             | B2-U0-G1      |
| Lifetime L90B50 (hour) | >60,000       |
| Lifetime L80B50 (hour) | >60,000       |

## Options


## Technical information

|                         |                                                                                                                                           |
|-------------------------|-------------------------------------------------------------------------------------------------------------------------------------------|
| Mounting                | Surface mountable                                                                                                                         |
| Housing                 | Corrosion resistant, extruded, marine grade aluminum housing                                                                              |
| Finishing               | Chromate conversion pretreatment followed by electrostatic powder coating                                                                 |
| Fasteners               | Stainless steel (AISI 304 / EN 1.4301 grade)                                                                                              |
| Gasket                  | Silicone                                                                                                                                  |
| Lens / Reflector        | High reflectance aluminium coating, multifaceted micro reflector                                                                          |
| Glass / Diffuser        | UV stable, bio-based polycarbonate diffuser                                                                                               |
| Impact protection       | IK08                                                                                                                                      |
| Ingress protection      | IP65                                                                                                                                      |
| Input voltage           | 220-240V 50/60Hz                                                                                                                          |
| Insulation class        | Class I                                                                                                                                   |
| Weight                  | 11.8 kg                                                                                                                                   |
| LED module              | Multi-chip high power LEDs on metal-core PCB                                                                                              |
| Driver                  | Internal LED driver                                                                                                                       |
| Driver surge protection | 2/2 kV                                                                                                                                    |
| Power factor            | > 0.90                                                                                                                                    |
| Through wiring          | Single cable entry                                                                                                                        |
| Operating temperature   | -40...50°C                                                                                                                                |
| Cable                   | 0.5 m of flexible cable                                                                                                                   |
| Notes                   | As standard, 2 sockets of mono-phase are provided. Upon request, a maximum of 3 sockets with different socket types can be also provided. |

## Accessories (To be ordered separately)

---

### Anchorage



**630J014**

630J014

|                                                |  |      |  |          |  |
|------------------------------------------------|--|------|--|----------|--|
| Project name                                   |  | Type |  | Quantity |  |
| Date                                           |  | Note |  |          |  |
| LB6061.547-EN-SYM-350-840-ONOFF-EN-C1-_-_-_-_- |  |      |  |          |  |

| Light distribution        | Rated input power              | Colour temperature                              | Control           | Product colours                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
|---------------------------|--------------------------------|-------------------------------------------------|-------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| [SYM]<br>Symmetric - 114° | [350]<br>30 W                  | [840]<br>4000 K CRI 80                          | [ONOFF]<br>On/Off | <div>[HM1] </div> <div>Black</div> <div>[HM2] </div> <div>Dark grey</div> <div>[HM3] </div> <div>Anthracite grey</div> <div>[HM4] </div> <div>Light grey</div> <div>[HM5] </div> <div>White</div> <div>[HM6] </div> <div>Bronze</div> <div>[CC] </div> <div>Custom colour (Please specify RAL code)</div> |
| Height                    | Extras                         | Accessories ( <i>To be ordered separately</i> ) |                   |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| [H1]<br>1m<br><br>[HC]    | Consult the factory            | Anchorage                                       |                   |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
|                           | [UNI]<br>120-277V 50/60Hz      | [630J014]<br>630J014                            |                   |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
|                           | Luminaire body options         |                                                 |                   |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
|                           | [DPC]<br>Double powder coating |                                                 |                   |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |