
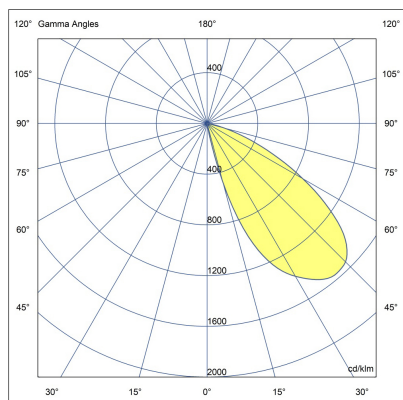


VERTEX 1 Module

CE UKCA IK08 IP66 

heper^L

LB6064.591-EN-SLFB-350-740-EN-C1

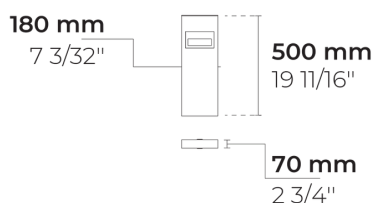

[SLFB]
Special linear,
Forward throw

Variant

Light distribution	[SLFB] 144x41°
Delivered lumens flux	473 lm
Rated input power	8 W
Colour temperature	4000 K CRI 70
Luminaire efficacy	59 lm/W
Lamp	6 LED
MacAdam Ellipse	3 SDCM
BUG rating	B2-U0-G1
Lifetime L90B50 (hour)	>60,000
Lifetime L80B50 (hour)	>60,000


Options

Technical information

Mounting	Surface mountable
Housing	Corrosion resistant, extruded, marine grade aluminum housing
Finishing	Chromate conversion pretreatment followed by electrostatic powder coating
Fasteners	Stainless steel (AISI 304 / EN 1.4301 grade)
Gasket	Liquid silicone
Lens / Reflector	High reflectance aluminium coating, multifaceted micro reflector
Glass / Diffusor	Tempered safety glass
Impact protection	IK08
Ingress protection	IP66
Input voltage	220-240V 50/60Hz
Insulation class	Class I
Weight	4.51 kg
LED module	Multi-chip high power LEDs on metal-core PCB
Driver	Internal LED driver
Driver surge protection	1/1 kV
Power factor	> 0.90
Through wiring	Single cable entry
Operating temperature	-25...50°C
Cable	0.5 m of flexible cable

Accessories (To be ordered separately)

Anchorage



628I005

628I005

Project name		Type		Quantity	
Date		Note			
LB6064.591-EN-SLFB-350-740-__-EN-C1-__-__-__					

Light distribution	Rated input power	Colour temperature	Control	Product colours
[SLFB] Special linear, Forward throw - 144x41°	[350] 8 W	[740] 4000 K CRI 70 [827] 2700 K CRI 80 [830] 3000 K CRI 80 [840] 4000 K CRI 80	[ONOFF] On/Off [DALI] DALI	[HM1]  Black [HM2]  Dark grey [HM3]  Anthracite grey [HM4]  Light grey [HM5]  White [HM6]  Bronze [CC]  Custom colour (Please specify RAL code) [WD]  Wooden
Height	Extras	Accessories (<i>To be ordered separately</i>)		
[H0.50] 50cm [HC]	Luminaire body options [DPC] Double powder coating	Anchorage [628I005] 628I005		