



URBAN BOLLARD Asym

CE UK CA IK08 IP65

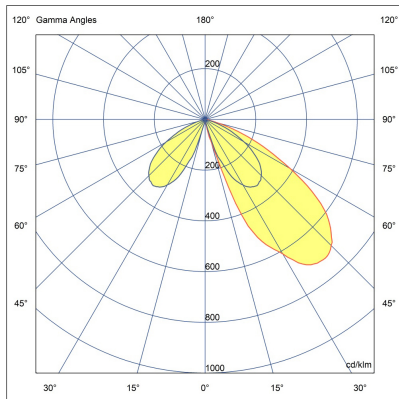

LB6060.548-EN-ASYM-350-827-ONOFF-EN-C1

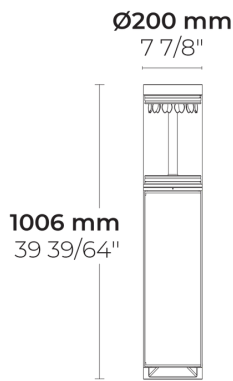

[ASYM]
Asymmetric

Variant

Light distribution	[ASYM] 102x45°
Delivered lumens flux	1048 lm
Rated input power	15 W
Colour temperature	2700 K CRI 80
Luminaire efficacy	69 lm/W
Lamp	6 LED
MacAdam Ellipse	3 SDCM
BUG rating	B2-U0-G1
Lifetime L90B50 (hour)	>60,000
Lifetime L80B50 (hour)	>60,000


Options

Technical information

Mounting	Surface mountable
Housing	Corrosion resistant, extruded, marine grade aluminum housing
Finishing	Chromate conversion pretreatment followed by electrostatic powder coating
Fasteners	Stainless steel (AISI 304 / EN 1.4301 grade)
Gasket	Silicone
Lens / Reflector	High reflectance aluminium coating, multifaceted micro reflector
Glass / Diffusor	UV stable, bio-based polycarbonate diffusor
Impact protection	IK08
Ingress protection	IP65
Input voltage	220-240V 50/60Hz
Insulation class	Class I
Weight	11.8 kg
LED module	Multi-chip high power LEDs on metal-core PCB
Driver	Internal LED driver
Driver surge protection	2/2 kV
Power factor	> 0.90
Through wiring	Single cable entry
Operating temperature	-40...50°C
Cable	0.5 m of flexible cable

Accessories (To be ordered separately)

Anchorage



630J014

630J014

Project name		Type		Quantity	
Date		Note			
LB6060.548-EN-ASYM-350-827-ONOFF-EN-C1-__-__-__-__					

Light distribution	Rated input power	Colour temperature	Control	Product colours
[ASYM] Asymmetric - 102x45°	[350] 15 W	[827] 2700 K CRI 80	[ONOFF] On/Off	[HM1]  Black [HM2]  Dark grey [HM3]  Anthracite grey [HM4]  Light grey [HM5]  White [HM6]  Bronze [CC]  Custom colour (Please specify RAL code)
		[830] 3000 K CRI 80 [740] 4000 K CRI 70 [840] 4000 K CRI 80		
Height	Extras	Accessories (<i>To be ordered separately</i>)		
[H1] 1m	Consult the factory	Anchorage		
[HC]	[UNI] 120-277V 50/60Hz	[630J014] 630J014		
	Luminaire body options			
	[DPC] Double powder coating			