



# VERTEX 1 Module

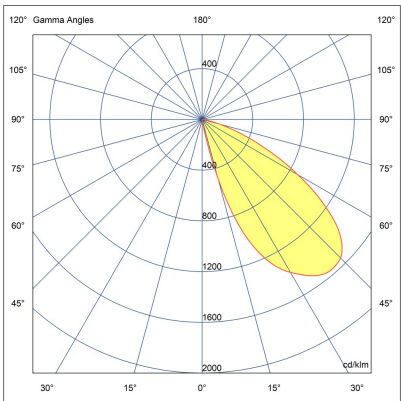

LB6064.591-US-SLFB-350-740-ONOFF

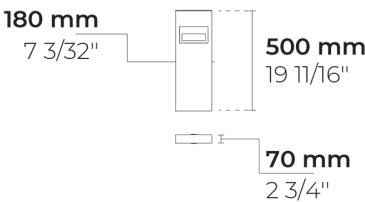

[SLFB]

Special linear,  
Forward throw

## Configuration

Light distribution	[SLFB] 144x41°
Delivered lumens flux	473 lm
Rated input power	8 W
Color temperature	4000 K CRI 70
Luminaire efficacy	59 lm/W
Lamp	6 LED
Color Deviation	3 SDCM
BUG rating	B2-U0-G1
Lifetime L90 (hour)	>60,000
Lifetime L80 (hour)	>60,000


## Options

## Technical information

Mounting	Surface mountable
Housing	Corrosion resistant, extruded, marine grade aluminum housing
Finishing	Chromate conversion pretreatment followed by electrostatic powder coating
Fasteners	Stainless steel (AISI 304 / EN 1.4301 grade)
Gasket	Liquid silicone
Lens / Reflector	High reflectance aluminium coating, multifaceted micro reflector
Glass / Diffusor	Tempered safety glass
Impact protection	IK08
Ingress protection	IP66
Input voltage	120-277V 50/60Hz
Insulation class	Class I
Weight	9.9 lbs
LED module	Multi-chip high power LEDs on metal-core PCB
Driver	Internal LED driver
Driver surge protection	2/2 kV
Power factor	> 0.90
Through wiring	Single power cord entry
Operating temperature	-40...50°C
Power cord	20" of outdoor use rated flexible power cord








Accessories (To be ordered separately)

Anchor bolts



628I005  
628I005

Project name				Type		Quantity	
Date		Note					
LB6064.591-US-SLFB-350-740-ONOFF-__-__							

Light distribution	Rated input power	Color temperature	Control	Product colors
[SLFB] Special linear, Forward throw - 144x41°	[350] 8 W	[740] 4000 K CRI 70	[ONOFF] On/Off	[HM1] Black 
		[827] 2700 K CRI 80		[HM2] Dark gray 
		[830] 3000 K CRI 80		[HM3] Anthracite gray 
		[840] 4000 K CRI 80		[HM4] Light gray 
				[HM5] White 
				[HM6] Bronze 
				[CC]  Custom color (Please specify RAL code)
Height	Accessories ( <i>To be ordered separately</i> )			
[H0.50] 1.6'	Anchor bolts			
[HC]	[628I005] 628I005			