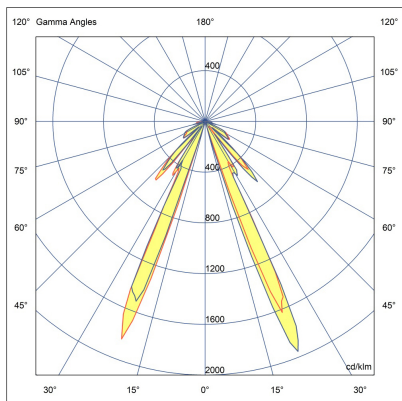
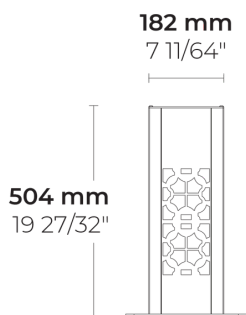
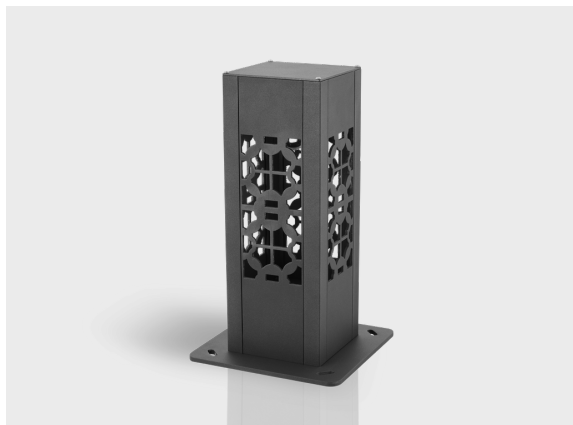


LB6059.599-EN-SYM-4L-350-827-ONOFF-EN-C1

**[SYM-4L]**Symmetric, Special  
effect: 4 lines

### Variant

<b>Light distribution</b>	[SYM-4L] 50°
<b>Delivered lumens flux</b>	256 lm
<b>Rated input power</b>	14 W
<b>Colour temperature</b>	2700 K CRI 80
<b>Luminaire efficacy</b>	18 lm/W
<b>Lamp</b>	1 COB
<b>MacAdam Ellipse</b>	3 SDCM
<b>Lifetime L90B50 (hour)</b>	>55,000
<b>Lifetime L80B50 (hour)</b>	>55,000

### Options


### Technical information

<b>Mounting</b>	Surface mountable
<b>Housing</b>	Corrosion resistant, marine grade aluminum housing
<b>Finishing</b>	Chromate conversion pretreatment followed by electrostatic powder coating
<b>Fasteners</b>	Stainless steel (AISI 304 / EN 1.4301 grade)
<b>Gasket</b>	Silicone
<b>Lens / Reflector</b>	Glass lens with high optical efficiency
<b>Glass / Diffusor</b>	Tempered safety glass
<b>Impact protection</b>	IK08
<b>Ingress protection</b>	IP66
<b>Input voltage</b>	220-240V 50/60Hz
<b>Insulation class</b>	Class I
<b>Weight</b>	6.84 kg
<b>LED module</b>	Multi-chip high power LEDs on metal-core PCB
<b>Driver</b>	Internal LED driver
<b>Driver surge protection</b>	4/2 kV
<b>Power factor</b>	> 0.90
<b>Through wiring</b>	Single cable entry
<b>Operating temperature</b>	-40...50°C
<b>Cable</b>	0.5 m of flexible cable

## Accessories (To be ordered separately)

---








### Anchorage



**628I003**

628I003

Project name		Type		Quantity	
Date		Note			
LB6059.599-EN-SYM-4L-350-827-ONOFF-EN-C1-__-__-__-__					

Light distribution	Rated input power	Colour temperature	Control	Product colours	
<b>[SYM-4L]</b> Symmetric, Special effect: 4 lines - 50°	<b>[350]</b> 14 W	<b>[827]</b> 2700 K CRI 80	<b>[ONOFF]</b> On/Off	<b>[HM1]</b> Black	
	<b>[700]</b> 29 W	<b>[830]</b> 3000 K CRI 80		<b>[HM2]</b> Dark grey	
	<b>[500]</b> 21 W	<b>[740]</b> 4000 K CRI 70		<b>[HM3]</b> Anthracite grey	
		<b>[840]</b> 4000 K CRI 80		<b>[HM4]</b> Light grey	
				<b>[HM5]</b> White	
				<b>[HM6]</b> Bronze	
				<b>[CC]</b> Custom colour (Please specify RAL code)	
<b>Height</b>	<b>Extras</b>	<b>Accessories (<i>To be ordered separately</i>)</b>			
<b>[H0.50]</b> 50cm  <b>[HC]</b>	<b>Consult the factory</b>	<b>Anchorages</b>			
	<b>[CP]</b> Custom pattern	<b>[628I003]</b> 628I003			
	<b>Luminaire body options</b>				
	<b>[DPC]</b> Double powder coating				