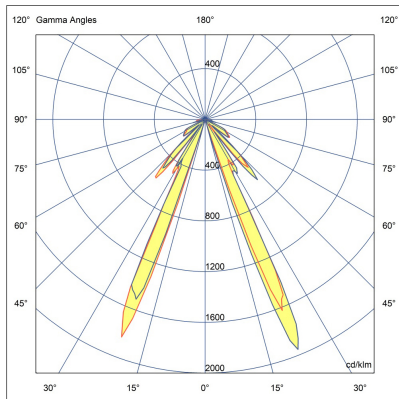

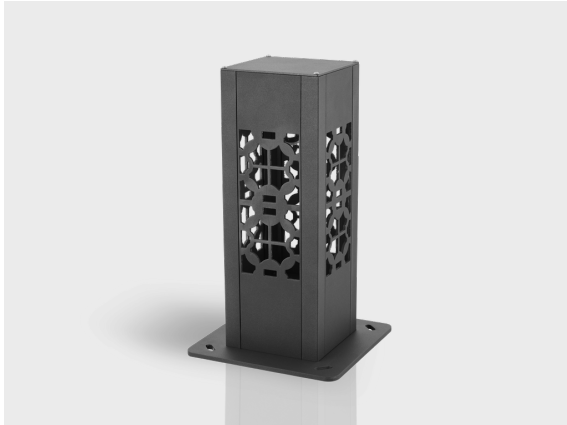


LB6059.599-EN-SYM-4L-350-830-ONOFF-EN-C1

**[SYM-4L]**Symmetric, Special
effect: 4 lines

Variant

Light distribution	[SYM-4L] 50°
Delivered lumens flux	267 lm
Rated input power	14 W
Colour temperature	3000 K CRI 80
Luminaire efficacy	19 lm/W
Lamp	1 COB
MacAdam Ellipse	3 SDCM
Lifetime L90B50 (hour)	>55,000
Lifetime L80B50 (hour)	>55,000


Options

Technical information

Mounting	Surface mountable
Housing	Corrosion resistant, marine grade aluminum housing
Finishing	Chromate conversion pretreatment followed by electrostatic powder coating
Fasteners	Stainless steel (AISI 304 / EN 1.4301 grade)
Gasket	Silicone
Lens / Reflector	Glass lens with high optical efficiency
Glass / Diffusor	Tempered safety glass
Impact protection	IK08
Ingress protection	IP66
Input voltage	220-240V 50/60Hz
Insulation class	Class I
Weight	6.84 kg
LED module	Multi-chip high power LEDs on metal-core PCB
Driver	Internal LED driver
Driver surge protection	4/2 kV
Power factor	> 0.90
Through wiring	Single cable entry
Operating temperature	-40...50°C
Cable	0.5 m of flexible cable

Accessories (To be ordered separately)








Anchorage



628I003

628I003

Project name		Type		Quantity	
Date		Note			
LB6059.599-EN-SYM-4L-350-830-ONOFF-EN-C1-__-__-__-__					

Light distribution	Rated input power	Colour temperature	Control	Product colours	
[SYM-4L] Symmetric, Special effect: 4 lines - 50°	[350] 14 W	[830] 3000 K CRI 80	[ONOFF] On/Off	[HM1] Black	
	[700] 29 W	[827] 2700 K CRI 80		[HM2] Dark grey	
	[500] 21 W	[740] 4000 K CRI 70		[HM3] Anthracite grey	
		[840] 4000 K CRI 80		[HM4] Light grey	
				[HM5] White	
				[HM6] Bronze	
				[CC] Custom colour (Please specify RAL code)	
Height	Extras	Accessories (<i>To be ordered separately</i>)			
[H0.50] 50cm [HC]	Consult the factory	Anchorages			
	[CP] Custom pattern	[628I003] 628I003			
	Luminaire body options				
	[DPC] Double powder coating				