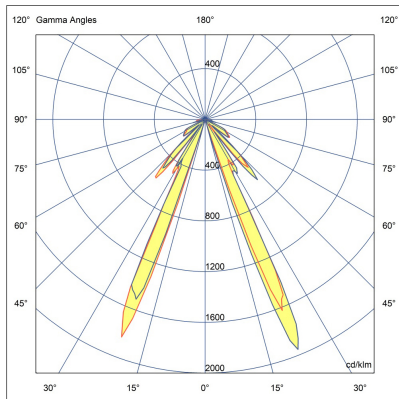

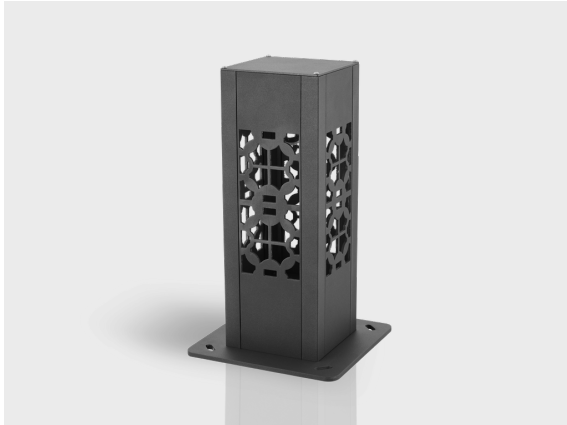


LB6059.599-EN-SYM-4L-500-830-ONOFF-EN-C1

**[SYM-4L]**Symmetric, Special  
effect: 4 lines

### Variant

<b>Light distribution</b>	[SYM-4L] 50°
<b>Delivered lumens flux</b>	381 lm
<b>Rated input power</b>	21 W
<b>Colour temperature</b>	3000 K CRI 80
<b>Luminaire efficacy</b>	18 lm/W
<b>Lamp</b>	1 COB
<b>MacAdam Ellipse</b>	3 SDCM
<b>Lifetime L90B50 (hour)</b>	>55,000
<b>Lifetime L80B50 (hour)</b>	>55,000


### Options

### Technical information

<b>Mounting</b>	Surface mountable
<b>Housing</b>	Corrosion resistant, marine grade aluminum housing
<b>Finishing</b>	Chromate conversion pretreatment followed by electrostatic powder coating
<b>Fasteners</b>	Stainless steel (AISI 304 / EN 1.4301 grade)
<b>Gasket</b>	Silicone
<b>Lens / Reflector</b>	Glass lens with high optical efficiency
<b>Glass / Diffusor</b>	Tempered safety glass
<b>Impact protection</b>	IK08
<b>Ingress protection</b>	IP66
<b>Input voltage</b>	220-240V 50/60Hz
<b>Insulation class</b>	Class I
<b>Weight</b>	6.84 kg
<b>LED module</b>	Multi-chip high power LEDs on metal-core PCB
<b>Driver</b>	Internal LED driver
<b>Driver surge protection</b>	4/2 kV
<b>Power factor</b>	> 0.90
<b>Through wiring</b>	Single cable entry
<b>Operating temperature</b>	-40...50°C
<b>Cable</b>	0.5 m of flexible cable

# Accessories (To be ordered separately)








## Anchorage



628I003

628I003

Project name		Type		Quantity	
Date		Note			
LB6059.599-EN-SYM-4L-500-830-ONOFF-EN-C1-__-__-__-__					

Light distribution	Rated input power	Colour temperature	Control	Product colours	
[SYM-4L] Symmetric, Special effect: 4 lines - 50°	[500] 21 W	[830] 3000 K CRI 80	[ONOFF] On/Off	[HM1] Black	
	[700] 29 W	[827] 2700 K CRI 80		[HM2] Dark grey	
	[350] 14 W	[740] 4000 K CRI 70		[HM3] Anthracite grey	
		[840] 4000 K CRI 80		[HM4] Light grey	
				[HM5] White	
				[HM6] Bronze	
				[CC] Custom colour (Please specify RAL code)	
Height	Extras	Accessories ( <i>To be ordered separately</i> )			
[H0.50] 50cm  [HC]	Consult the factory	Anchorages			
	[CP] Custom pattern	[628I003] 628I003			
	Luminaire body options				
	[DPC] Double powder coating				