
ZEROX M Hybrid

CE 🕵 🖳 IK10 IP67



LR9017.690-EN-S-350-840-EN-C1-SS

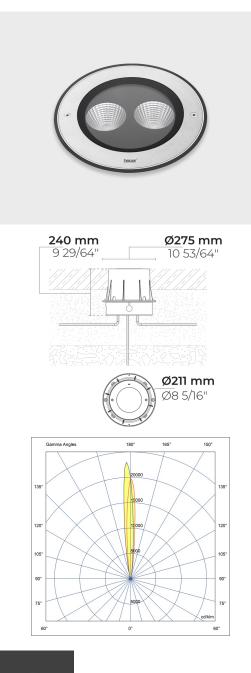

[S]

Spot

Variant

Light distribution	[S] 7°
Delivered lumens flux	1077 lm
Rated input power	10 W
Colour temperature	4000 K CRI 80
Luminaire efficacy	107 lm/W
Lamp	2 LED
MacAdam Ellipse	5 SDCM
Lifetime L90B50 (hour)	>72,600
Lifetime L80B50 (hour)	>72,600

Options

Technical information

Mounting	Ground recessed mountable
Housing	Corrosion resistant stainless steel housing (AISI
-	316L / EN 1.4571 grade)
Fasteners	Stainless steel (AISI 304 / EN 1.4301 grade)
Gasket	Silicone
Lens / Reflector	High reflectance aluminium coating
Glass / Diffusor	Tempered safety glass
Impact protection	IK10
Ingress protection	IP67
Input voltage	220-240V 50/60Hz
Insulation class	Class I
Weight	4.06 kg
LED module	Multi-chip high power LEDs on metal-core PCB
Driver	Internal LED driver
Driver surge	1/1 kV
protection	
Power factor	> 0.90
Through wiring	Single cable entry
Operating	-3050°C
temperature	
Cable	0.3 m of rubber-sheated cable


HPR Pazarlama A.Ş.

Başkent OSB 22. Cd. No: 2, Malıköy, Temelli, Sincan, 06909 Ankara, Turkey +90 312 267 54 30 info@hepergroup.com

HEPER Europe GmbH

Ahornweg 5a, 58675 Hemer, Germany +49 237 2901 2975 infoEU@hepergroup.com We reserve the right to change specifications without prior written notice. Edition: 19.05.2024. For current version visit heperlighting.com. All flux (±%7 tolerance) and power values (±%10 tolerance) are derived following appropriate IES, CIE, and applicable standards.

Accessories (To be ordered separately)

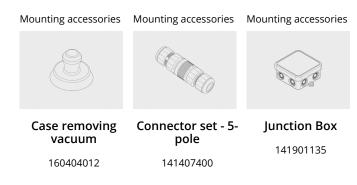

Mounting accessories



Plastic case for ZEROX M

007502092

HPR Pazarlama A.Ş. Başkent OSB 22. Cd. No: 2, Malıköy, Temelli, Sincan, 06909 Ankara, Turkey +90 312 267 54 30 info@hepergroup.com

HEPER Europe GmbH

Ahornweg 5a, 58675 Hemer, Germany +49 237 2901 2975 infoEU@hepergroup.com We reserve the right to change specifications without prior written notice. Edition: 19.05.2024. For current version visit heperlighting.com. All flux (±%7 tolerance) and power values (±%10 tolerance) are derived following appropriate IES, CIE, and applicable standards.

2/3

Project na	me				Туре	Quantity	
Date			Note				
LR9017.	690-EN-S	-350-840-	EN-C1	-SS			

Light distribution	Rated input power	Colour temperature	Control	Product colours
[S] Spot - 7°	[350] 10 W	[840] 4000 K CRI 80	[ONOFF] On/Off	[SS] Stainless steel
[N] Narrow - 26°	[700] 18 W	[827] 2700 K CRI 80	[DALI] DALI	
	[500] 13 W	[830] 3000 K CRI 80		
		[740] 4000 K CRI 70		
Extras	Accessories (To be ordered separately)			
Consult the factory	Mounting]		
[UNI] 120-277V 50/60Hz	accessories	-		
	[160404012] Case removing vacuum			
	[141407400] Connector set - 5-pole			
	[141901135] Junction Box			
	[007502092] Plastic case for ZEROX M			
	M			

HEPER Europe GmbH

Ahornweg 5a, 58675 Hemer, Germany +49 237 2901 2975 infoEU@hepergroup.com We reserve the right to change specifications without prior written notice. Edition: 19.05.2024. For current version visit heperlighting.com. All flux (±%7 tolerance) and power values (±%10 tolerance) are derived following appropriate IES, CIE, and applicable standards.