



ZEROX Hybrid



IK10 IP67



LR9005.695-EN-N-500-827-EN-C1-SS

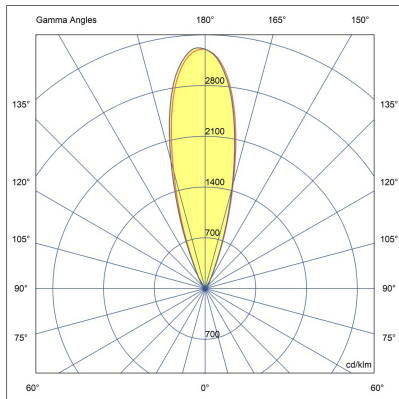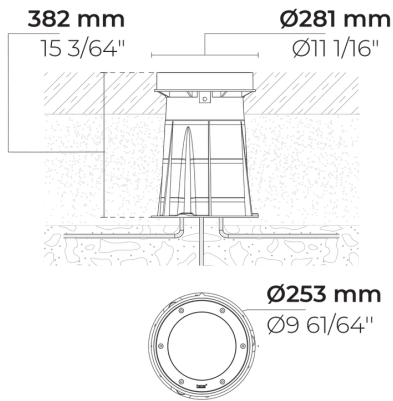

[N]
Narrow

Variant

| | |
|------------------------|---------------|
| Light distribution | [N] 26° |
| Delivered lumens flux | 2585 lm |
| Rated input power | 28 W |
| Colour temperature | 2700 K CRI 80 |
| Luminaire efficacy | 92 lm/W |
| Lamp | 4 LED |
| MacAdam Ellipse | 5 SDCM |
| Lifetime L90B50 (hour) | >72,600 |
| Lifetime L80B50 (hour) | >72,600 |

Options

Technical information

| | |
|-------------------------|---|
| Mounting | Ground recessed mountable |
| Housing | Corrosion resistant stainless steel housing (AISI 316L / EN 1.4571 grade) |
| Fasteners | Stainless steel (AISI 304 / EN 1.4301 grade) |
| Gasket | Silicone |
| Lens / Reflector | High reflectance aluminium coating |
| Glass / Diffuser | Tempered safety glass |
| Impact protection | IK10 |
| Ingress protection | IP67 |
| Input voltage | 220-240V 50/60Hz |
| Insulation class | Class I |
| Weight | 6.85 kg |
| LED module | Multi-chip high power LEDs on metal-core PCB |
| Driver | Internal LED driver |
| Driver surge protection | 10/6 kV |
| Power factor | > 0.95 |
| Through wiring | Single cable entry |
| Operating temperature | -40...50°C |
| Cable | 0.3 m of rubber-sheathed cable |
| Notes | QUICK SHIP: Some variants will be delivered faster. Please consult the factory. |

HPR Pazarlama A.Ş.
Başkent OSB 22. Cd. No: 2, Malıköy, Temelli,
Sincan, 06909 Ankara, Turkey
+90 312 267 54 30
info@hepergroup.com

HEPER Europe GmbH
Ahornweg 5a, 58675
Hemer, Germany
+49 237 2901 2975
infoEU@hepergroup.com

We reserve the right to change specifications without prior written notice. Edition: 12.05.2024.
For current version visit heperlighting.com. All flux (±7% tolerance) and power values (±10% tolerance) are derived following appropriate IES, CIE, and applicable standards.

Accessories (To be ordered separately)


Mounting accessories



Case removing vacuum

160404012


Mounting accessories



Connector set - 5-pole

141407400


Mounting accessories



Junction Box

141901135


Mounting accessories



Plastic case for ZEROX

007501028

| | | | | | |
|--|--|------|--|----------|--|
| Project name | | Type | | Quantity | |
| Date | | Note | | | |
| LR9005.695-EN-N-500-827-__-EN-C1-SS-__ | | | | | |

| Light distribution | Rated input power | Colour temperature | Control | Product colours |
|----------------------------------|--|---|--------------------------|--|
| [N] Narrow - 26° | [500] 28 W | [827] 2700 K CRI 80 | [ONOFF] On/Off | [SS] Stainless steel  |
| [S] Spot - 7° | [350] 18 W | [830] 3000 K CRI 80 [740] 4000 K CRI 70 [840] 4000 K CRI 80 | [DALI] DALI | |
| Extras | Accessories (To be ordered separately) | | | |
| Consult the factory | Mounting accessories | | | |
| [UNI] 120-277V 50/60Hz | [160404012] Case removing vacuum [141407400] Connector set - 5-pole [141901135] Junction Box [007501028] Plastic case for ZEROX | | | |