
# **ZEROX S Hybrid**

# CE 🕵 🖳 IK10 IP67



## LR9016.693-EN-N-350-740-EN-C1-SS



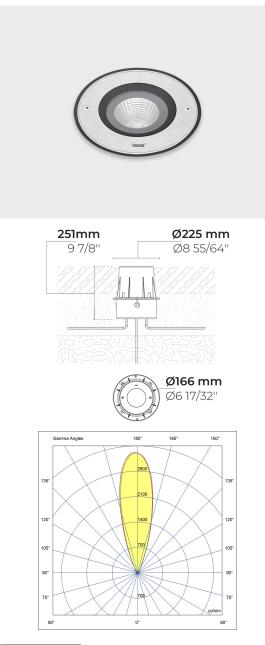

Narrow

### Variant

Light distribution	[N] 26°
Delivered lumens flux	588 lm
Rated input power	5 W
Colour temperature	4000 K CRI 70
Luminaire efficacy	117 lm/W
Lamp	1 LED
MacAdam Ellipse	5 SDCM
Lifetime L90B50 (hour)	>72,600
Lifetime L80B50 (hour)	>72,600

### Options

## **Technical information**

Mounting	Ground recessed mountable
Housing	Corrosion resistant stainless steel housing (AISI
-	316L / EN 1.4571 grade)
Fasteners	Stainless steel (AISI 304 / EN 1.4301 grade)
Gasket	Silicone
Lens / Reflector	High reflectance aluminium coating
Glass / Diffusor	Tempered safety glass
Impact protection	IK10
Ingress protection	IP67
Input voltage	220-240V 50/60Hz
Insulation class	Class I
Weight	2.81 kg
LED module	Multi-chip high power LEDs on metal-core PCB
Driver	Internal LED driver
Driver surge	1/1 kV
protection	
Power factor	> 0.91
Through wiring	Single cable entry
Operating	-2550°C
temperature	
Cable	0.3 m of rubber-sheated cable


#### HPR Pazarlama A.Ş.

Başkent OSB 22. Cd. No: 2, Malıköy, Temelli, Sincan, 06909 Ankara, Turkey +90 312 267 54 30 info@hepergroup.com

#### HEPER Europe GmbH

Ahornweg 5a, 58675 Hemer, Germany +49 237 2901 2975 infoEU@hepergroup.com We reserve the right to change specifications without prior written notice. Edition: 18.05.2024. For current version visit heperlighting.com. All flux (±%7 tolerance) and power values (±%10 tolerance) are derived following appropriate IES, CIE, and applicable standards.

# Accessories (To be ordered separately)

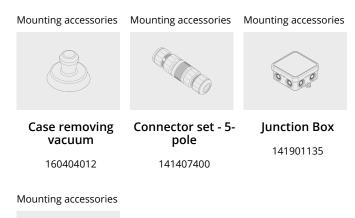



Plastic case for ZEROX S

007502091

HPR Pazarlama A.Ş. Başkent OSB 22. Cd. No: 2, Malıköy, Temelli, Sincan, 06909 Ankara, Turkey +90 312 267 54 30 info@hepergroup.com HEPER Europe GmbH

Ahornweg 5a, 58675 Hemer, Germany +49 237 2901 2975 infoEU@hepergroup.com We reserve the right to change specifications without prior written notice. Edition: 18.05.2024. For current version visit heperlighting.com. All flux (±%7 tolerance) and power values (±%10 tolerance) are derived following appropriate IES, CIE, and applicable standards.

2/3

Project na	me				Туре	Quantity	
Date			Note				
LR9016.	693-EN-N	-350-740	EN-C	1-SS			

[350] 5 W [700] 10 W [500] 6 W Accessories ( <i>To be</i>	[740] 4000 K CRI 70 [827] 2700 K CRI 80 [830] 3000 K CRI 80 [840] 4000 K CRI 80	[ONOFF] On/Off [DALI] DALI	[SS] Stainless steel
10 W <b>[500]</b> 6 W	2700 K CRI 80 [830] 3000 K CRI 80 [840]		
6 W	3000 K CRI 80 [ <b>840]</b>		
Accorporios (To bo			
Accessories (To be			
ordered separately)			
Mounting			
accessories	-		
[ <b>160404012</b> ] Case removing vacuum			
<b>[141407400]</b> Connector set - 5-pole			
<b>[141901135]</b> Junction Box			
[007502091] Plastic case for ZEROX S			
	Mounting accessories [160404012] Case removing vacuum [141407400] Connector set - 5-pole [141901135] Junction Box [007502091] Plastic case for ZEROX	ordered separately)   Mounting   accessories   [160404012]   Case removing   vacuum   [141407400]   Connector set - 5-pole   [141901135]   Junction Box   [007502091]   Plastic case for ZEROX	ordered separately)   Mounting   accessories   [160404012]   Case removing   vacuum   [141407400]   Connector set - 5-pole   [141901135]   Junction Box   [007502091]   Plastic case for ZEROX

#### HEPER Europe GmbH

Ahornweg 5a, 58675 Hemer, Germany +49 237 2901 2975 infoEU@hepergroup.com We reserve the right to change specifications without prior written notice. Edition: 18.05.2024. For current version visit heperlighting.com. All flux (±%7 tolerance) and power values (±%10 tolerance) are derived following appropriate IES, CIE, and applicable standards.