



# ZEROX M Hybrid



IK10 IP67



LR9017.690-EN-N-350-827-EN-C1-SS

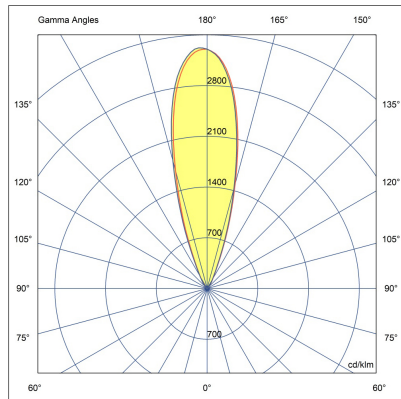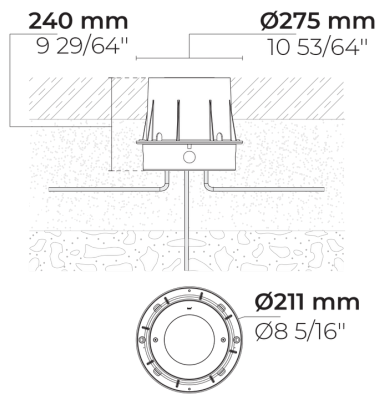

[N]  
Narrow

## Variant

|                        |               |
|------------------------|---------------|
| Light distribution     | [N] 26°       |
| Delivered lumens flux  | 956 lm        |
| Rated input power      | 10 W          |
| Colour temperature     | 2700 K CRI 80 |
| Luminaire efficacy     | 95 lm/W       |
| Lamp                   | 2 LED         |
| MacAdam Ellipse        | 5 SDCM        |
| Lifetime L90B50 (hour) | >72,600       |
| Lifetime L80B50 (hour) | >72,600       |

## Options

## Technical information

|                         |                                                                           |
|-------------------------|---------------------------------------------------------------------------|
| Mounting                | Ground recessed mountable                                                 |
| Housing                 | Corrosion resistant stainless steel housing (AISI 316L / EN 1.4571 grade) |
| Fasteners               | Stainless steel (AISI 304 / EN 1.4301 grade)                              |
| Gasket                  | Silicone                                                                  |
| Lens / Reflector        | High reflectance aluminium coating                                        |
| Glass / Diffuser        | Tempered safety glass                                                     |
| Impact protection       | IK10                                                                      |
| Ingress protection      | IP67                                                                      |
| Input voltage           | 220-240V 50/60Hz                                                          |
| Insulation class        | Class I                                                                   |
| Weight                  | 4.06 kg                                                                   |
| LED module              | Multi-chip high power LEDs on metal-core PCB                              |
| Driver                  | Internal LED driver                                                       |
| Driver surge protection | 1/1 kV                                                                    |
| Power factor            | > 0.90                                                                    |
| Through wiring          | Single cable entry                                                        |
| Operating temperature   | -30...50°C                                                                |
| Cable                   | 0.3 m of rubber-sheathed cable                                            |

## Accessories (To be ordered separately)

---


Mounting accessories



**Case removing vacuum**

160404012


Mounting accessories



**Connector set - 5-pole**

141407400

Mounting accessories



**Junction Box**

141901135

Mounting accessories



**Plastic case for ZEROX M**

007502092

|                                        |  |      |  |          |  |
|----------------------------------------|--|------|--|----------|--|
| Project name                           |  | Type |  | Quantity |  |
| Date                                   |  | Note |  |          |  |
| LR9017.690-EN-N-350-827-__-EN-C1-SS-__ |  |      |  |          |  |

| Light distribution               | Rated input power                                                                                                                                                                              | Colour temperature                                                                              | Control                  | Product colours                                                                                                    |
|----------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------|--------------------------|--------------------------------------------------------------------------------------------------------------------|
| <b>[N]</b><br>Narrow - 26°       | <b>[350]</b><br>10 W                                                                                                                                                                           | <b>[827]</b><br>2700 K CRI 80                                                                   | <b>[ONOFF]</b><br>On/Off | <b>[SS]</b><br>Stainless steel  |
| <b>[S]</b><br>Spot - 7°          | <b>[700]</b><br>18 W<br><b>[500]</b><br>13 W                                                                                                                                                   | <b>[830]</b><br>3000 K CRI 80<br><b>[740]</b><br>4000 K CRI 70<br><b>[840]</b><br>4000 K CRI 80 | <b>[DALI]</b><br>DALI    |                                                                                                                    |
| <b>Extras</b>                    | <b>Accessories (To be ordered separately)</b>                                                                                                                                                  |                                                                                                 |                          |                                                                                                                    |
| <b>Consult the factory</b>       | <b>Mounting accessories</b>                                                                                                                                                                    |                                                                                                 |                          |                                                                                                                    |
| <b>[UNI]</b><br>120-277V 50/60Hz | <b>[160404012]</b><br>Case removing vacuum<br><br><b>[141407400]</b><br>Connector set - 5-pole<br><br><b>[141901135]</b><br>Junction Box<br><br><b>[007502092]</b><br>Plastic case for ZEROX M |                                                                                                 |                          |                                                                                                                    |