



# ZEROX Hybrid

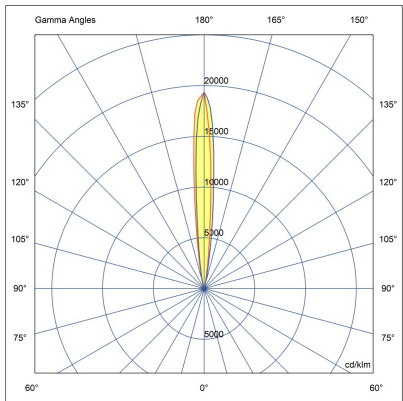

LR9005.695-US-S-350-740-SS

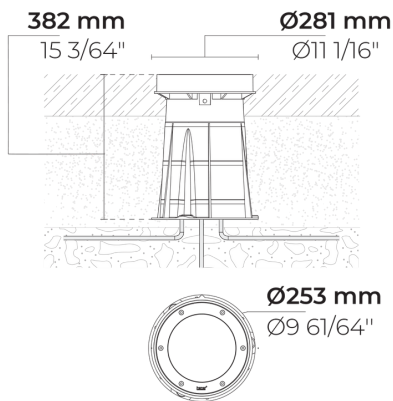

[S]

Spot - NEMA Type 0

## Configuration

|                       |               |
|-----------------------|---------------|
| Light distribution    | [S] 7°        |
| Delivered lumens flux | 2353 lm       |
| Rated input power     | 18 W          |
| Color temperature     | 4000 K CRI 70 |
| Luminaire efficacy    | 117 lm/W      |
| Lamp                  | 4 LED         |
| Color Deviation       | 5 SDCM        |
| Lifetime L90 (hour)   | >72,600       |
| Lifetime L80 (hour)   | >72,600       |


## Options

## Technical information

|                         |                                                                           |
|-------------------------|---------------------------------------------------------------------------|
| Mounting                | Ground recessed mountable                                                 |
| Housing                 | Corrosion resistant stainless steel housing (AISI 316L / EN 1.4571 grade) |
| Fasteners               | Stainless steel (AISI 304 / EN 1.4301 grade)                              |
| Gasket                  | Silicone                                                                  |
| Lens / Reflector        | High reflectance aluminium coating                                        |
| Glass / Diffuser        | Tempered safety glass                                                     |
| Impact protection       | IK10                                                                      |
| Ingress protection      | IP67                                                                      |
| Input voltage           | 120-277V 50/60Hz                                                          |
| Insulation class        | Class I                                                                   |
| Weight                  | 15 lbs                                                                    |
| LED module              | Multi-chip high power LEDs on metal-core PCB                              |
| Driver                  | Internal LED driver                                                       |
| Driver surge protection | 10/6 kV                                                                   |
| Power factor            | > 0.95                                                                    |
| Through wiring          | Single power cord entry                                                   |
| Operating temperature   | -40...50°C                                                                |
| Power cord              | 12" of rubber-sheathed power cord                                         |

Accessories (Included)

Mounting accessories



Connector set - 5-pole

141407400

Accessories (To be ordered separately)


Mounting accessories



Case removing vacuum

160404012

Mounting accessories



Plastic case for ZEROX

007501028

|                               |  |  |      |  |      |  |          |  |
|-------------------------------|--|--|------|--|------|--|----------|--|
| Project name                  |  |  |      |  | Type |  | Quantity |  |
| Date                          |  |  | Note |  |      |  |          |  |
| LR9005.695-US-S-350-740-__-SS |  |  |      |  |      |  |          |  |

| Light distribution                           | Rated input power                                                                              | Color temperature                                                                                       | Control                  | Product colors                                                                                                     |
|----------------------------------------------|------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------|--------------------------|--------------------------------------------------------------------------------------------------------------------|
| <b>[S]</b><br>Spot - NEMA Type 0 - 7°        | <b>[350]</b><br>18 W                                                                           | <b>[740]</b><br>4000 K CRI 70                                                                           | <b>[ONOFF]</b><br>On/Off | <b>[SS]</b><br>Stainless steel  |
| <b>[N]</b><br>Narrow - NEMA Type 2 - 26°     | <b>[500]</b><br>28 W                                                                           | <b>[827]</b><br>2700 K CRI 80<br><br><b>[830]</b><br>3000 K CRI 80<br><br><b>[840]</b><br>4000 K CRI 80 | <b>[0-10V]</b><br>0-10V  |                                                                                                                    |
| <b>Accessories (Included)</b>                | <b>Accessories (To be ordered separately)</b>                                                  |                                                                                                         |                          |                                                                                                                    |
| <b>Mounting accessories</b>                  | <b>Mounting accessories</b>                                                                    |                                                                                                         |                          |                                                                                                                    |
| <b>[141407400]</b><br>Connector set - 5-pole | <b>[160404012]</b><br>Case removing vacuum<br><br><b>[007501028]</b><br>Plastic case for ZEROX |                                                                                                         |                          |                                                                                                                    |