



# ZEROX M Hybrid

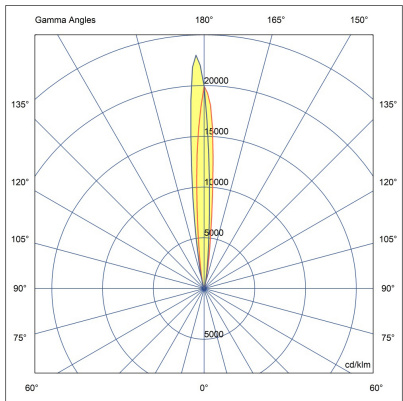

LR9017.690-US-S-350-830-SS

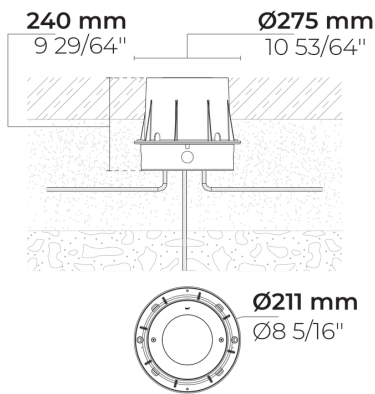

[S]

Spot - NEMA Type 0

## Configuration

|                       |               |
|-----------------------|---------------|
| Light distribution    | [S] 7°        |
| Delivered lumens flux | 973 lm        |
| Rated input power     | 10 W          |
| Color temperature     | 3000 K CRI 80 |
| Luminaire efficacy    | 97 lm/W       |
| Lamp                  | 2 LED         |
| Color Deviation       | 5 SDCM        |
| Lifetime L90 (hour)   | >72,600       |
| Lifetime L80 (hour)   | >72,600       |

## Options

Product colors




## Technical information

|                         |                                                                           |
|-------------------------|---------------------------------------------------------------------------|
| Mounting                | Ground recessed mountable                                                 |
| Housing                 | Corrosion resistant stainless steel housing (AISI 316L / EN 1.4571 grade) |
| Fasteners               | Stainless steel (AISI 304 / EN 1.4301 grade)                              |
| Gasket                  | Silicone                                                                  |
| Lens / Reflector        | High reflectance aluminium coating                                        |
| Glass / Diffusor        | Tempered safety glass                                                     |
| Impact protection       | IK10                                                                      |
| Ingress protection      | IP67                                                                      |
| Input voltage           | 120-277V 50/60Hz                                                          |
| Insulation class        | Class I                                                                   |
| Weight                  | 8.9 lbs                                                                   |
| LED module              | Multi-chip high power LEDs on metal-core PCB                              |
| Driver                  | Internal LED driver                                                       |
| Driver surge protection | 2/2 kV                                                                    |
| Power factor            | > 0.90                                                                    |
| Through wiring          | Single power cord entry                                                   |
| Operating temperature   | -30...50°C                                                                |
| Power cord              | 12" of rubber-sheated power cord                                          |

Accessories (Included)

Mounting accessories



Connector set - 5-pole

141407400

Accessories (To be ordered separately)

Mounting accessories



Case removing vacuum

160404012

Mounting accessories



Plastic case for ZEROX M

007502092

|                               |  |      |  |  |      |  |          |  |
|-------------------------------|--|------|--|--|------|--|----------|--|
| Project name                  |  |      |  |  | Type |  | Quantity |  |
| Date                          |  | Note |  |  |      |  |          |  |
| LR9017.690-US-S-350-830-__-SS |  |      |  |  |      |  |          |  |

| Light distribution                           | Rated input power                                                                            | Color temperature                                              | Control                  | Product colors                                                                                                     |
|----------------------------------------------|----------------------------------------------------------------------------------------------|----------------------------------------------------------------|--------------------------|--------------------------------------------------------------------------------------------------------------------|
| <b>[S]</b><br>Spot - NEMA Type 0 - 7°        | <b>[350]</b><br>10 W                                                                         | <b>[830]</b><br>3000 K CRI 80                                  | <b>[ONOFF]</b><br>On/Off | <b>[SS]</b><br>Stainless steel  |
| <b>[N]</b><br>Narrow - NEMA Type 2 - 26°     | <b>[700]</b><br>18 W<br><b>[500]</b><br>13 W                                                 | <b>[827]</b><br>2700 K CRI 80<br><b>[840]</b><br>4000 K CRI 80 | <b>[0-10V]</b><br>0-10V  |                                                                                                                    |
| <b>Accessories (Included)</b>                | <b>Accessories (To be ordered separately)</b>                                                |                                                                |                          |                                                                                                                    |
| <b>Mounting accessories</b>                  | <b>Mounting accessories</b>                                                                  |                                                                |                          |                                                                                                                    |
| <b>[141407400]</b><br>Connector set - 5-pole | <b>[160404012]</b><br>Case removing vacuum<br><b>[007502092]</b><br>Plastic case for ZEROX M |                                                                |                          |                                                                                                                    |