
ZEROX M Hybrid

LR9017.690-US-S-500-827-SS





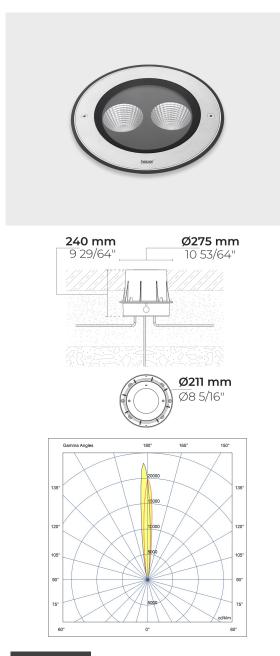

Configuration

| Light distribution | [S] 7° |
|-----------------------|---------------|
| Delivered lumens flux | 1292 lm |
| Rated input power | 13 W |
| Color temperature | 2700 K CRI 80 |
| Luminaire efficacy | 99 lm/W |
| Lamp | 2 LED |
| Color Deviation | 5 SDCM |
| Lifetime L90 (hour) | >72,600 |
| Lifetime L80 (hour) | >72,600 |

Options

Product colors

Technical information

| Mounting | Ground recessed mountable |
|--------------------|---|
| Housing | Corrosion resistant stainless steel housing (AISI |
| | 316L / EN 1.4571 grade) |
| Fasteners | Stainless steel (AISI 304 / EN 1.4301 grade) |
| Gasket | Silicone |
| Lens / Reflector | High reflectance aluminium coating |
| Glass / Diffusor | Tempered safety glass |
| Impact protection | IK10 |
| Ingress protection | IP67 |
| Input voltage | 120-277V 50/60Hz |
| Insulation class | Class I |
| Weight | 8.9 lbs |
| LED module | Multi-chip high power LEDs on metal-core PCB |
| Driver | Internal LED driver |
| Driver surge | 2/2 kV |
| protection | |
| Power factor | > 0.90 |
| Through wiring | Single power cord entry |
| Operating | -3050°C |
| temperature | |
| Power cord | 12" of rubber-sheated power cord |

HEPER USA LLC W227 N546 Westmound Drive Waukesha, 53186 Wisconsin, United States +1 312 910 9740 infoUS@hepergroup.com

Accessories (Included)

Accessories (To be ordered separately)

Mounting accessories



Connector set - 5pole

141407400

Mounting accessories Mounting accessories





Case removing vacuum 160404012 Plastic case for ZEROX M

007502092

HEPER USA LLC W227 N546 Westmound Drive Waukesha, 53186 Wisconsin, United States +1 312 910 9740 infoUS@hepergroup.com We reserve the right to change specifications without prior written notice. Edition: 19.05.2024. For current version visit heperlighting.com. All flux (\pm %7 tolerance) and power values (\pm %10 tolerance) are derived following appropriate IES, CIE, and applicable standards.

| Project na | me | | | Туре | Quantity | |
|------------|----------|-----------|------|------|----------|--|
| Date | | | Note | | | |
| LR9017. | 690-US-S | -500-827- | SS | | | |

| Light distribution | Rated input power | Color temperature | Control | Product colors |
|--|--|-------------------------------|--------------------------|--------------------------------|
| [S] Spot - NEMA Type 0 - | [500] 13 W | [827] 2700 K CRI 80 | [ONOFF] On/Off | [SS] Stainless steel |
| 7° [N] Narrow - NEMA Type 2 - 26° | [700] 18 W | [830] 3000 K CRI 80 | [0-10V] 0-10V | |
| | [350] 10 W | [740] 4000 K CRI 70 | | |
| | | [840] 4000 K CRI 80 | | |
| Accessories (<i>Included</i>) | Accessories (To be ordered separately) | | | |
| Mounting accessories | Mounting accessories | | | |
| [141407400] Connector set - 5-pole | [160404012] Case removing vacuum | | | |
| | [007502092] Plastic case for ZEROX M | | | |