



# ZEROX M Hybrid

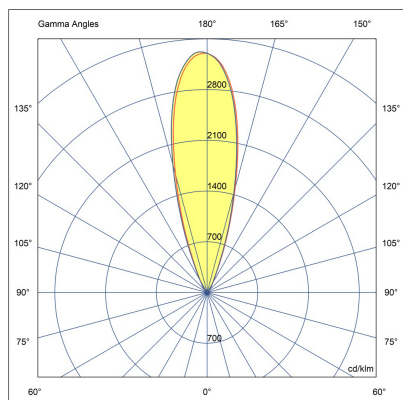

LR9017.690-US-N-350-830-SS

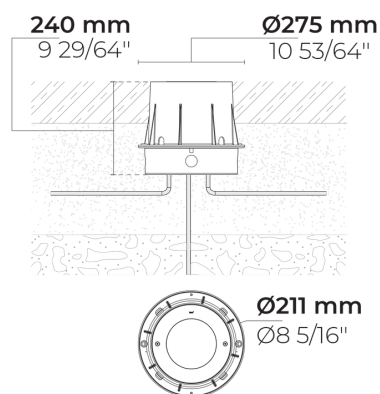

[N]

Narrow - NEMA Type 2

## Configuration

Light distribution	[N] 26°
Delivered lumens flux	973 lm
Rated input power	10 W
Color temperature	3000 K CRI 80
Luminaire efficacy	97 lm/W
Lamp	2 LED
Color Deviation	5 SDCM
Lifetime L90 (hour)	>72,600
Lifetime L80 (hour)	>72,600

## Options

## Technical information

Mounting	Ground recessed mountable
Housing	Corrosion resistant stainless steel housing (AISI 316L / EN 1.4571 grade)
Fasteners	Stainless steel (AISI 304 / EN 1.4301 grade)
Gasket	Silicone
Lens / Reflector	High reflectance aluminium coating
Glass / Diffuser	Tempered safety glass
Impact protection	IK10
Ingress protection	IP67
Input voltage	120-277V 50/60Hz
Insulation class	Class I
Weight	8.9 lbs
LED module	Multi-chip high power LEDs on metal-core PCB
Driver	Internal LED driver
Driver surge protection	2/2 kV
Power factor	> 0.90
Through wiring	Single power cord entry
Operating temperature	-30...50°C
Power cord	12" of rubber-sheathed power cord

Accessories (Included)

Mounting accessories



Connector set - 5-pole

141407400

Accessories (To be ordered separately)

Mounting accessories



Case removing vacuum

160404012

Mounting accessories



Plastic case for ZEROX M

007502092

Project name					Type		Quantity	
Date		Note						
LR9017.690-US-N-350-830-__-SS								

Light distribution	Rated input power	Color temperature	Control	Product colors
<b>[N]</b> Narrow - NEMA Type 2 - 26°	<b>[350]</b> 10 W	<b>[830]</b> 3000 K CRI 80	<b>[ONOFF]</b> On/Off	<b>[SS]</b> Stainless steel
<b>[S]</b> Spot - NEMA Type 0 - 7°	<b>[700]</b> 18 W  <b>[500]</b> 13 W	<b>[827]</b> 2700 K CRI 80  <b>[740]</b> 4000 K CRI 70  <b>[840]</b> 4000 K CRI 80	<b>[0-10V]</b> 0-10V	
<b>Accessories</b> <i>(Included)</i>	<b>Accessories</b> <i>(To be ordered separately)</i>			
<b>Mounting accessories</b>	<b>Mounting accessories</b>			
<b>[141407400]</b> Connector set - 5-pole	<b>[160404012]</b> Case removing vacuum  <b>[007502092]</b> Plastic case for ZEROX M			