



ZEROX M Hybrid

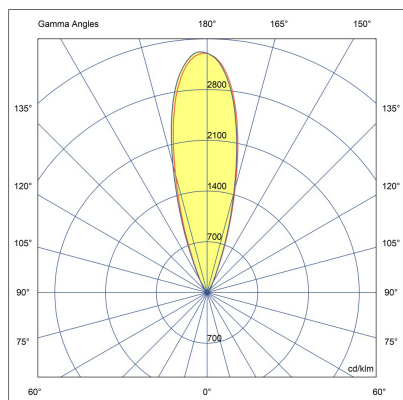

LR9017.690-US-N-500-830-SS

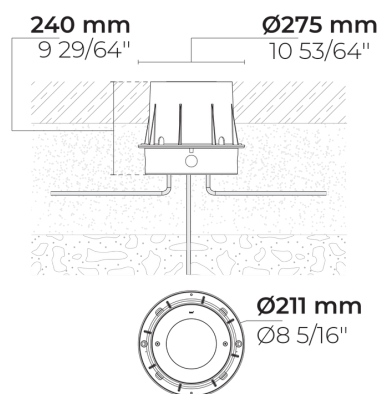

[N]

Narrow - NEMA Type 2

Configuration

Light distribution	[N] 26°
Delivered lumens flux	1309 lm
Rated input power	13 W
Color temperature	3000 K CRI 80
Luminaire efficacy	100 lm/W
Lamp	2 LED
Color Deviation	5 SDCM
Lifetime L90 (hour)	>72,600
Lifetime L80 (hour)	>72,600

Options

Product colors




Technical information

Mounting	Ground recessed mountable
Housing	Corrosion resistant stainless steel housing (AISI 316L / EN 1.4571 grade)
Fasteners	Stainless steel (AISI 304 / EN 1.4301 grade)
Gasket	Silicone
Lens / Reflector	High reflectance aluminium coating
Glass / Diffusor	Tempered safety glass
Impact protection	IK10
Ingress protection	IP67
Input voltage	120-277V 50/60Hz
Insulation class	Class I
Weight	8.9 lbs
LED module	Multi-chip high power LEDs on metal-core PCB
Driver	Internal LED driver
Driver surge protection	2/2 kV
Power factor	> 0.90
Through wiring	Single power cord entry
Operating temperature	-30...50°C
Power cord	12" of rubber-sheated power cord

Accessories (Included)

Mounting accessories



Connector set - 5-pole

141407400

Accessories (To be ordered separately)

Mounting accessories



Case removing vacuum

160404012

Mounting accessories



Plastic case for ZEROX M

007502092

Project name					Type		Quantity	
Date		Note						
LR9017.690-US-N-500-830-__-SS								

Light distribution	Rated input power	Color temperature	Control	Product colors
[N] Narrow - NEMA Type 2 - 26°	[500] 13 W	[830] 3000 K CRI 80	[ONOFF] On/Off	[SS] Stainless steel
[S] Spot - NEMA Type 0 - 7°	[700] 18 W	[827] 2700 K CRI 80	[0-10V] 0-10V	
	[350] 10 W	[740] 4000 K CRI 70		
		[840] 4000 K CRI 80		
Accessories <i>(Included)</i>	Accessories <i>(To be ordered separately)</i>			
Mounting accessories	Mounting accessories			
[141407400] Connector set - 5-pole	[160404012] Case removing vacuum			
	[007502092] Plastic case for ZEROX M			