



# ZEROX M Dyno

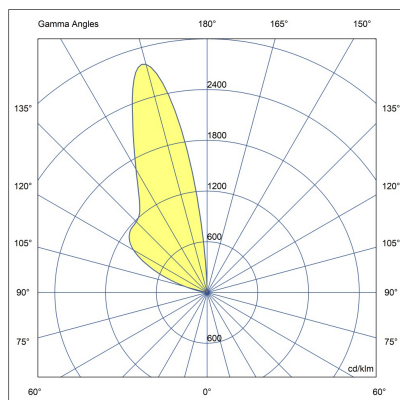

LR9017.522-US-WW-350-827-SS

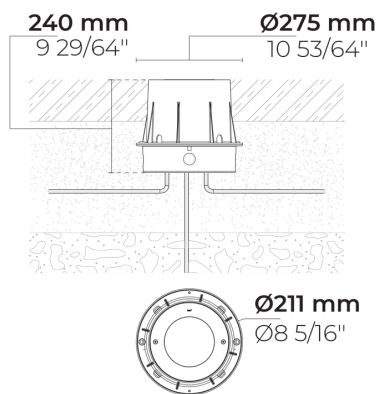

[WW]  
Wall-wash

## Configuration

Light distribution	[WW] 35x28°
Delivered lumens flux	448 lm
Rated input power	5 W
Color temperature	2700 K CRI 80
Luminaire efficacy	89 lm/W
Lamp	2 LED
Color Deviation	3 SDCM
Lifetime L90 (hour)	>42,000
Lifetime L80 (hour)	>42,000

## Options

### Product colors



## Technical information

Mounting	Ground recessed mountable
Housing	Corrosion resistant stainless steel housing (AISI 316L / EN 1.4571 grade)
Fasteners	Stainless steel (AISI 304 / EN 1.4301 grade)
Gasket	Silicone
Lens / Reflector	High reflectance aluminium coating, multifaceted micro reflector
Glass / Diffusor	Tempered safety glass
Impact protection	IK10
Ingress protection	IP67
Input voltage	120-277V 50/60Hz
Insulation class	Class I
Weight	8.9 lbs
LED module	High power LEDs on metal-core PCB
Driver	Internal LED driver
Driver surge protection	3/3 kV
Power factor	> 0.40
Through wiring	Single power cord entry
Operating temperature	-40...50°C
Power cord	12" of rubber-sheated power cord

Accessories (Included)

Mounting accessories



Connector set - 5-pole

141407400

Accessories (To be ordered separately)

Mounting accessories



Case removing vacuum

160404012


Mounting accessories



Plastic case for ZEROX M

007502092

Project name					Type		Quantity	
Date			Note					
LR9017.522-US-WW-350-827-__-SS								

Light distribution	Rated input power	Color temperature	Control	Product colors
<b>[WW]</b> Wall-wash - 35x28°	<b>[350]</b> 5 W	<b>[827]</b> 2700 K CRI 80	<b>[ONOFF]</b> On/Off	<b>[SS]</b> Stainless steel 
		<b>[830]</b> 3000 K CRI 80 <b>[740]</b> 4000 K CRI 70 <b>[840]</b> 4000 K CRI 80	<b>[0-10V]</b> 0-10V	
<b>Accessories</b> <i>(Included)</i>	<b>Accessories (To be ordered separately)</b>			
<b>Mounting accessories</b>	<b>Mounting accessories</b>			
<b>[141407400]</b> Connector set - 5-pole	<b>[160404012]</b> Case removing vacuum <b>[007502092]</b> Plastic case for ZEROX M			