



# DOMINO W ML EVO 2 Module

CE UK CA IK08 IP66

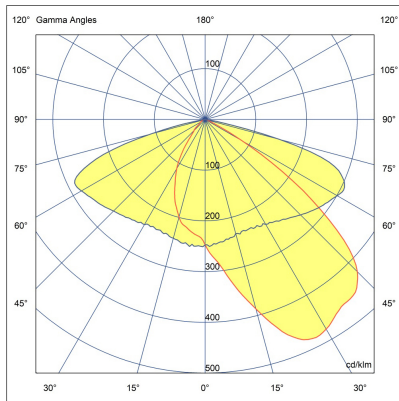

LW7031.682-EN-T2-700-840-EN-C1

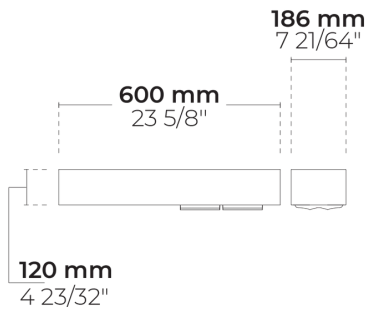

[T2]

Type II, Asymmetric,  
Side throw

## Variant

|                        |               |
|------------------------|---------------|
| Light distribution     | [T2] 130x85°  |
| Delivered lumens flux  | 5891 lm       |
| Rated input power      | 70 W          |
| Colour temperature     | 3000 K CRI 80 |
| Luminaire efficacy     | 84 lm/W       |
| Lamp                   | 8 LED         |
| MacAdam Ellipse        | 5 SDCM        |
| BUG rating             | B1-U0-G1      |
| Photobiological safety | Risk group 0  |
| Lifetime L90B50 (hour) | >60,000       |
| Lifetime L80B50 (hour) | >60,000       |

## Options

## Technical information

|                         |                                                                           |
|-------------------------|---------------------------------------------------------------------------|
| Mounting                | Surface or wall mountable                                                 |
| Housing                 | Corrosion resistant, marine grade aluminum housing                        |
| Finishing               | Chromate conversion pretreatment followed by electrostatic powder coating |
| Fasteners               | Stainless steel (AISI 304 / EN 1.4301 grade)                              |
| Gasket                  | Silicone                                                                  |
| Lens / Reflector        | High reflectance aluminium coating, multifaceted micro reflector          |
| Glass / Diffusor        | Tempered safety glass                                                     |
| Impact protection       | IK08                                                                      |
| Ingress protection      | IP66                                                                      |
| Input voltage           | 220-240V 50/60Hz                                                          |
| Insulation class        | Class I                                                                   |
| Weight                  | 8.15 kg                                                                   |
| LED module              | Multi-chip high power LEDs on metal-core PCB                              |
| Driver                  | Internal LED driver                                                       |
| Driver surge protection | 6/6 kV                                                                    |
| Power factor            | > 0.95                                                                    |
| Through wiring          | Single cable entry                                                        |
| Operating temperature   | -40...50°C                                                                |
| Cable                   | 0.2 m of flexible cable                                                   |

HPR Pazarlama A.Ş.  
Başkent OSB 22. Cd. No: 2, Malıköy, Temelli,  
Sincan, 06909 Ankara, Turkey  
+90 312 267 54 30  
info@hepergroup.com

HEPER Europe GmbH  
Ahornweg 5a, 58675  
Hemer, Germany  
+49 237 2901 2975  
infoEU@hepergroup.com

We reserve the right to change specifications without prior written notice. Edition: 19.05.2024.  
For current version visit [heperlighting.com](http://heperlighting.com). All flux (±%7 tolerance) and power values (±%10 tolerance) are derived following appropriate IES, CIE, and applicable standards.

|                                                   |  |             |  |                 |  |
|---------------------------------------------------|--|-------------|--|-----------------|--|
| <b>Project name</b>                               |  | <b>Type</b> |  | <b>Quantity</b> |  |
| <b>Date</b>                                       |  | <b>Note</b> |  |                 |  |
| <b>LW7031.682-EN-T2-700-840-__-EN-C1-__-__-__</b> |  |             |  |                 |  |

| Light distribution                                          | Rated input power    | Colour temperature                                                                                                                           | Control                                                                                                               | Product colours                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
|-------------------------------------------------------------|----------------------|----------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>[T2]</b><br>Type II, Asymmetric,<br>Side throw - 130x85° | <b>[700]</b><br>70 W | <b>[830]</b><br>3000 K CRI 80<br><br><b>[827]</b><br>2700 K CRI 80<br><br><b>[740]</b><br>4000 K CRI 70<br><br><b>[840]</b><br>4000 K CRI 80 | <b>[ONOFF]</b><br>On/Off<br><br><b>[DALI]</b><br>DALI<br><br><b>[AUTO]</b><br>AutoDIM<br><br><b>[STEP]</b><br>StepDIM | <b>[HM1]</b> <br>Black<br><br><b>[HM2]</b> <br>Dark grey<br><br><b>[HM3]</b> <br>Anthracite grey<br><br><b>[HM4]</b> <br>Light grey<br><br><b>[HM5]</b> <br>White<br><br><b>[HM6]</b> <br>Bronze<br><br><b>[CC]</b> <br>Custom colour (Please<br>specify RAL code) |
| <b>Extras</b>                                               |                      |                                                                                                                                              |                                                                                                                       |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| <b>Consult the factory</b>                                  |                      |                                                                                                                                              |                                                                                                                       |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| <b>[UNI]</b><br>120-277V 50/60Hz                            |                      |                                                                                                                                              |                                                                                                                       |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| <b>Luminaire body options</b>                               |                      |                                                                                                                                              |                                                                                                                       |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| <b>[DPC]</b><br>Double powder<br>coating                    |                      |                                                                                                                                              |                                                                                                                       |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |